

# SIEMENS



## C500

Microcontroller Family  
Architecture and Instruction Set

User's Manual 01.97

[http://www.siemens.de/  
Semiconductor/](http://www.siemens.de/Semiconductor/)

**Contents**

**Fundamental Structure**

**CPU Functions**

**CPU Timing**

**Instruction Set**

**Package Information**

**Microelectronics Training Center  
Information on Literature  
Semiconductor Group – Addresses**

## **Edition 07.96**

This edition was realized using the software system FrameMaker".

**Published by Siemens AG,  
Bereich Halbleiter, Marketing-  
Kommunikation, Balanstraße 73,  
81541 München**

© Siemens AG 1996.  
All Rights Reserved.

### **Attention please!**

As far as patents or other rights of third parties are concerned, liability is only assumed for components, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, delivery and prices please contact the Semiconductor Group Offices in Germany or the Siemens Companies and Representatives worldwide (see address list).

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Siemens Office, Semiconductor Group.

Siemens AG is an approved CECC manufacturer.

### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport.

For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### **Components used in life-support devices or systems must be expressly authorized for such purpose!**

Critical components<sup>1</sup> of the Semiconductor Group of Siemens AG, may only be used in life-support devices or systems<sup>2</sup> with the express written approval of the Semiconductor Group of Siemens AG.

- 1 A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.
- 2 Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.

**SIEMENS**

**C500**

**Microcontroller Family**

Architecture and Instruction Set

User's Manual 07.96

<b>C500 Architecture and Instruction User's Manual</b>	
<b>Revision History :</b> <b>01.97</b> Original Version	
<b>Previous Releases:</b> 07.96	
<b>Page</b>	<b>Subjects (changes since last revision)</b>
Table of content	Reference to pages of each instruction added
4-89	Table header corrected

#### **Edition 01.97**

This edition was realized using the software system FrameMaker<sup>®</sup>.

**Published by Siemens AG,  
Bereich Halbleiter, Marketing-  
Kommunikation, Balanstraße 73,  
81541 München**

© Siemens AG 1996.

All Rights Reserved.

#### **Attention please!**

As far as patents or other rights of third parties are concerned, liability is only assumed for components, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, delivery and prices please contact the Semiconductor Group Offices in Germany or the Siemens Companies and Representatives worldwide (see address list).

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Siemens Office, Semiconductor Group.

Siemens AG is an approved CECC manufacturer.

#### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport.

For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

#### **Components used in life-support devices or systems must be expressly authorized for such purpose!**

Critical components<sup>1</sup> of the Semiconductor Group of Siemens AG, may only be used in life-support devices or systems<sup>2</sup> with the express written approval of the Semiconductor Group of Siemens AG.

- 1 A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

**Contents**





Table of Contents	Page
<b>1 Fundamental Structure</b>	1-1
1.1 Introduction	1-1
1.2 Memory Organization	1-2
1.2.1 Program Memory	1-2
1.2.2 Data Memory	1-3
1.2.2.1 Internal Data Memory	1-3
1.2.2.2 Internal Data Memory XRAM	1-5
1.2.2.3 External Data Memory	1-6
1.2.3 Special Function Register Area	1-6
<b>2 CPU Architecture</b>	2-1
2.1 Accumulator	2-2
2.2 B Register	2-2
2.3 Program Status Word	2-2
2.4 Stack Pointer	2-3
2.5 Data Pointer	2-4
2.5.1 The Importance of Additional Datapointers	2-5
2.5.2 How the eight Datapointers of the C500 are realized	2-5
2.5.3 Advantages of Multiple Datapointers	2-6
2.5.4 Application Example and Performance Analysis	2-6
2.6 Enhanced Hooks Emulation Concept	2-9
2.7 Basic Interrupt Handling	2-10
2.8 Interrupt Response Time	2-12
<b>3 CPU Timing</b>	3-1
3.1 Basic Timing	3-1
3.2 Accessing External Memory	3-3
3.2.1 Accessing External Program Memory	3-3
3.2.2 Accessing External Data Memory	3-4
<b>4 Instruction Set</b>	4-1
4.1 Addressing Modes	4-1
4.2 Introduction to the Instruction Set	4-3
4.2.1 Data Transfer Instructions	4-3
4.2.2 Arithmetic Instructions	4-4
4.2.3 Logic Instructions	4-5
4.2.4 Control Transfer Instructions	4-5
4.3 Instruction Definitions	4-7
ACALL addr11	4-9
ADD A, <src-byte>	4-10
ADDC A, <src-byte>	4-12
AJMP addr11	4-14
ANL <dest-byte>, <src-byte>	4-15
ANL direct, #data	4-17
ANL C, <src-bit>	4-18
CJNE <dest-byte>, <src-byte>, rel	4-19
CJNE @Ri, #data, rel	4-21
CLR A	4-22
CLR bit	4-23
CPL A	4-24



### Table of Contents

	Page
CPL bit	4-25
DA A	4-26
DEC byte	4-28
DIV AB	4-30
DJNZ <byte>, <rel-addr>	4-31
INC <byte>	4-33
INC DPTR	4-35
JB bit,rel	4-36
JBC bit,rel	4-37
JC rel	4-38
JMP @A + DPTR	4-39
JNB bit,rel	4-40
JNC rel	4-41
JNZ rel	4-42
JZ rel	4-43
LCALL addr16	4-44
LJMP addr16	4-45
MOV <dest-byte>, <src-byte>	4-46
MOV <dest-bit>, <src-bit>	4-51
MOV DPTR, #data16	4-52
MOVC A, @A + <base-reg>	4-53
MOVB <dest-byte>, <src-byte>	4-55
MUL AB	4-57
NOP	4-58
ORL <dest-byte>, <src-byte>	4-59
ORL C, <src-bit>	4-62
POP direct	4-63
PUSH direct	4-64
RET	4-65
RETI	4-66
RL A	4-67
RLC A	4-68
RR A	4-69
RRC A	4-70
SETB <bit>	4-71
SJMP rel	4-72
SUBB A, <src-byte>	4-73
SWAP A	4-75
XCH A, <byte>	4-76
XCHD A, @Ri	4-78
XRL <dest-byte>, <src-byte>	4-79
4.4 Instruction Set Summary Tables	4-82
4.4.1 Functional Groups of Instructions	4-82
4.4.2 Hexadecimal Ordered Instructions	4-87
<b>5 Package Information</b>	<b>5-1</b>
5.1 P-DIP Package	5-1
5.2 PLCC Packages	5-2
5.3 MQFP Packages	5-5



## Fundamental Structure



## 1 Fundamental Structure

### 1.1 Introduction

The members of the C500 Siemens microcontroller family are basically fully compatible in architecture and software to the standard 8051 microcontroller family. Especially, they are functionally upward compatible to the SAB 80C52/80C32 microcontroller. While maintaining all architectural and operational characteristics of the SAB 80C52/80C32, the C500 microcontrollers differ in number and complexity of their peripheral units which have been adapted to the specific application areas.

The goal of this "Architecture and Instruction Set Manual" is to summarize the basic architecture and functional characteristics of all members of the C500 microcontroller family. This includes the description of the architecture and the description of the complete instruction set. Detailed information about the different versions of the C500 microcontrollers are given in the specific User Manuals.

### 1.2 Memory Organization

The memory resources of the C500 family microcontrollers are organized in different types of memories (data and program memory), which further can be located internally on the microcontroller chip or outside of the microcontroller. The memory partitioning of the C500 microcontrollers is typical for a Harvard architecture where data and program areas are held in separate memory areas. The on-chip peripheral units are accessed using an internal special function register memory area.

The available memory areas have different sizes and are located in the following five address spaces:


**Table 1-1**  
**C500 Address Spaces**

Type of Memory	Location	Size
Program Memory	External	max. 64 KByte
	Internal (ROM, EEPROM)	Depending on C500 version 2K up to 64KByte
Data Memory	External	max. 64 KByte
	Internal XRAM	Depending on C500 version 256 Byte up to 3 KByte
	Internal	128 or 256 Byte
Special Function Register	Internal	128/256 Bytes

#### 1.2.1 Program Memory

The program memory of the C500 family microcontrollers can be composed of either completely external program memory, of only internal program memory (on-chip ROM / EEPROM), or of a mixture of internal and external program memory. If the  $\overline{EA}$  pin ( $\overline{EA}$ =External Access) is held at low level, the C500 microcontrollers execute the program code always out of the external program memory. Romless C500 derivatives can use this type of program memory only. C500 derivatives with on-chip program memory typically use their internal program memory only. If the internal program memory is used the  $\overline{EA}$  pin must be put to high level. With  $\overline{EA}$  high, the microcontroller executes instructions internally unless the address exceeds the upper limit of the internal program memory. If the program counter is set to an address (e.g. by a jump instruction) which is higher than the internal program memory, instructions are executed out of an external program memory. When the instruction address again is below the internal program memory size limit, internal program memory is accessed again.

**Figure 1-1** shows the typical C500 family microcontroller program memory configuration for the two cases  $\overline{EA}=0$  and  $\overline{EA}=1$ . The ROM boundary shown in **figure 1-1**, applies to the C501 which has 8K byte of internal ROM. Other C500 family microcontrollers with different ROM size have different ROM boundaries.

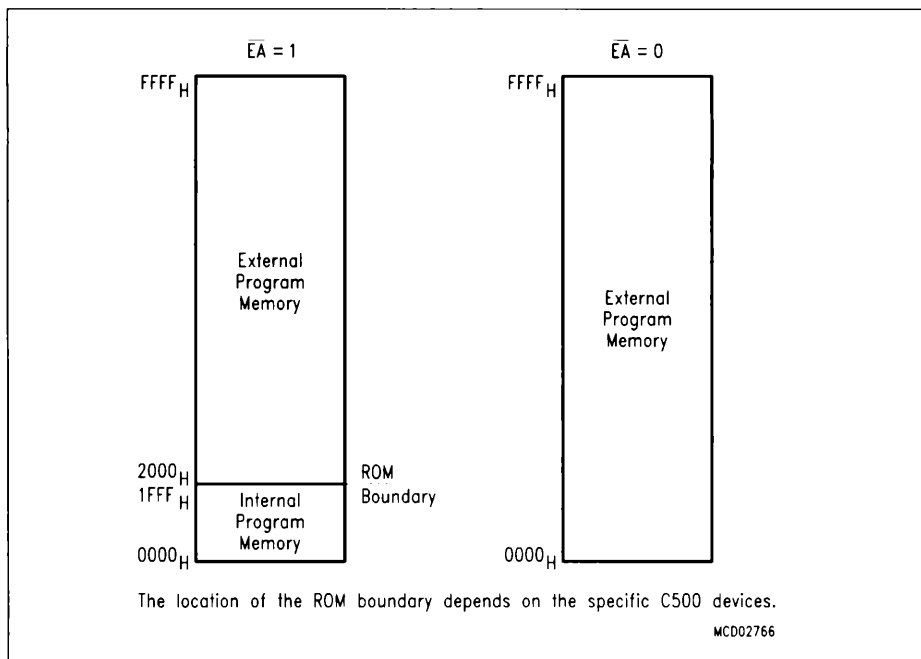

**Figure 1-1**  
**Program Memory Configuration (Example of the C501)**

### 1.2.2 Data Memory


The data memory area of the C500 family microcontrollers consists of internal and external data memory portions. The internal data memory area is addressed using 8-bit addresses. The external data memory and the internal XRAM data memory are addressed by 8-bit or 16-bit addresses.

The content of the internal data memory (also XRAM) is not affected by a reset operation. After power-up the content is undefined, while it remains unchanged during and after a reset as long as the power supply is not turned off. The XRAM content is also maintained when the C500 microcontrollers are in power saving modes.

#### 1.2.2.1 Internal Data Memory

The internal data memory address space is divided into three basic, physically separate and distinct blocks: the lower 128 byte of internal data RAM, the upper 128 byte of internal data RAM, and the 128 byte special function register (SFR) area. The lower internal data RAM and the SFR area further include 128 bit locations each. These bits can be handled by specific bit manipulation instructions.

**Figure 1-2** shows the configuration of the three basic internal RAM areas. The lower data RAM is located in the address range  $00_H$  -  $7F_H$  and can be addressed directly (e.g. MOV A,direct) or indirectly (e.g. MOV A,@R0 with address in R0). A bit-addressable area of 128 free programmable, direct addressable bits is located at byte addresses  $20_H$  -  $2F_H$  of the lower data RAM. Bit 0 of the internal data byte at  $20_H$  has the bit address  $00_H$  while bit 7 of the internal data byte at  $2F_H$  has the bit address  $7F_H$ . The lower 32 locations of the internal lower data RAM are assigned to four banks with eight general purpose registers (GPRs) each. Only one of these banks can be enabled at a time to be used as general purpose registers.

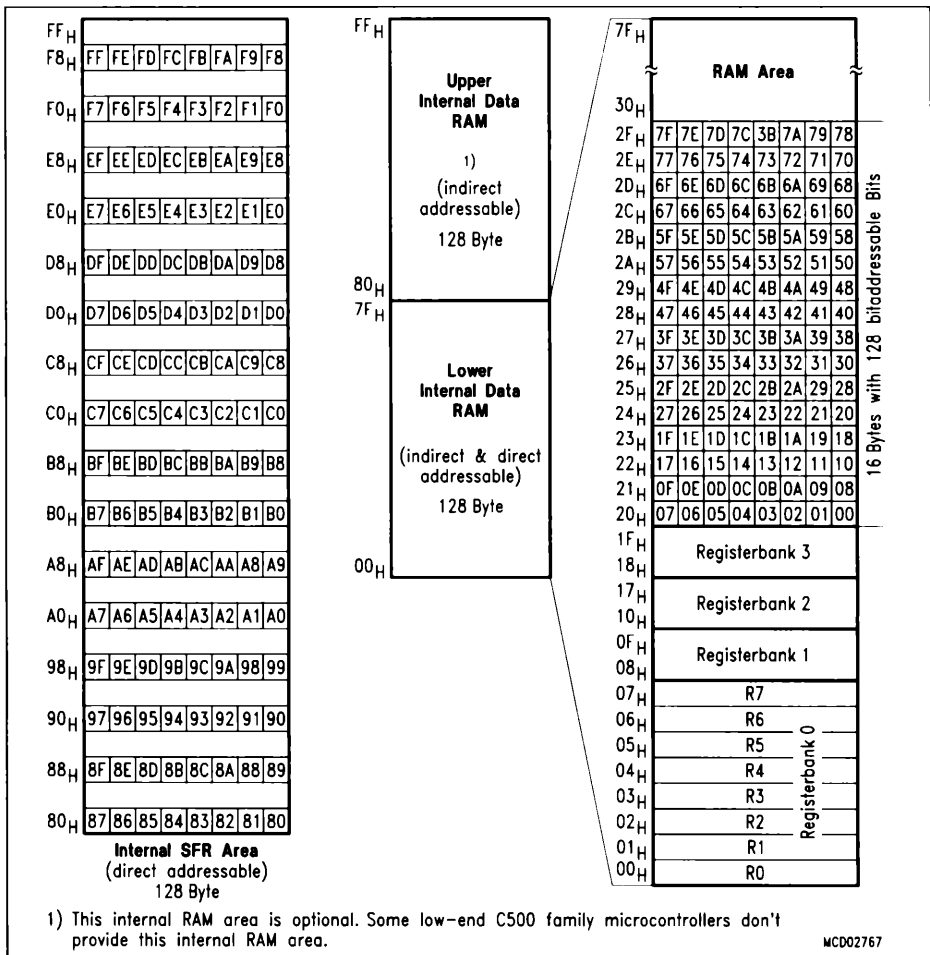


**Figure 1-2**  
**Internal Data Memory Organization**

While the SFR area and the upper internal RAM area share the same address locations ( $80_H$  -  $FF_H$ ), they must be accessed through different addressing modes. The upper internal RAM can only be accessed through indirect addressing while the special function registers (SFRs) are accessible only by direct addressing instructions. The SFRs which are located at addresses with address bit 0-2 equal 0 (addresses  $80_H$ ,  $88_H$ ,  $90_H$ , ...,  $F0_H$ ,  $FF_H$ ) are bitaddressable SFRs.

### 1.2.2.2 Internal Data Memory XRAM

Some members of the C500 family microcontrollers provide an additional internal data memory area, called the XRAM. This data memory area is logically located at the upper end of the external data memory space (except C502), but it is integrated on the chip. Because the XRAM is used in the same way as external data memory the same instruction types must be used for accessing the XRAM.

**Figure 1-3** shows a typical 256 byte XRAM address mapping of the C500 microcontrollers.

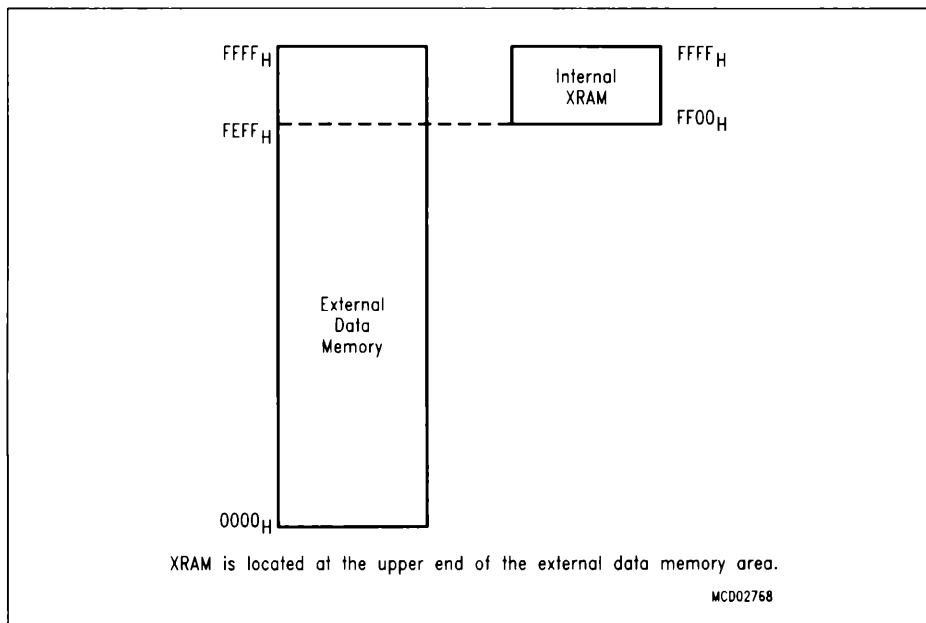

**Figure 1-3**  
**XRAM Memory Mapping (256 Byte)**

Depending on the C500 derivative, the size of the XRAM area differs from 128 upto 3K byte. Further, the XRAM can be enabled or disabled. If an internal XRAM area is disabled, external data memory can be accessed in the address range of the internal XRAM.



### 1.2.2.3 External Data Memory

The 64 Kbyte external data memory can be addressed by instructions that use 8-bit or 16-bit indirect addressing. A 16-bit external memory addressing mode is supported by the MOVX instructions using the 16-bit datapointer DPTR for addressing. For 8-bit addressing MOVX instructions with the general purpose registers R0/R1 are used.

### 1.2.3 Special Function Register Area

The registers of a C500 microcontroller, except the program counter and the four general purpose register banks, reside in the special function register (SFR) area. The special function register area typically provides 128 bytes of direct addressable SFRs. The SFRs which are located at addresses with address bit 0-2 equal 0 (addresses 80<sub>H</sub>, 88<sub>H</sub>, 90<sub>H</sub>, ..., F0<sub>H</sub>, FF<sub>H</sub>) are bitaddressable SFRs (see also figure 1-1). For example, the SFR with byte address 80<sub>H</sub> provides the bit locations with bit addresses 80<sub>H</sub> to 87<sub>H</sub>. The bit addresses of the SFR bits reach from 80<sub>H</sub> to FF<sub>H</sub>.

Due to the limited number of 128 standard SFRs, some derivatives of the C500 microcontroller family provide an additional 128 byte SFR area, called the mapped SFR area. The mapped SFR area provides the same addressing capabilities (direct addresses, bit addressing) as the standard SFR area.

#### Special Function Register SYSCON (Address B1<sub>H</sub>)

Bit No.	MSB	7	6	5	4	3	2	1	0	LSB
B1 <sub>H</sub>		-	-	-	RMAP	-	-	-	-	
										SYSCON

The functions of the shaded bits are not described in this section.

Bit	Function
RMAP	<p>Special function register map bit</p> <p>RMAP = 0 : The access to the non-mapped (standard) special function register area is enabled (default after reset).</p> <p>RMAP = 1 : The access to the mapped special function register area is enabled.</p>

As long as bit RMAP is set, mapped special function registers can be accessed. This bit is not cleared by hardware automatically. Thus, when non-mapped/mapped registers are to be accessed, the bit RMAP must be cleared/set by software, respectively each. Some registers (e.g. ACC) are accessed independently of bit RMAP.

Two bits in the program status word, RS0 (PSW.3) and RS1 (PSW.4), select the active register bank. This allows fast context switching, which is useful when entering subroutines or interrupt service routines. The 8 general purpose registers of the selected register bank may be accessed by register addressing. For indirect addressing modes, the registers R0 and R1 are used as pointer or index register to address internal or external memory (e.g. MOV @R0).


**CPU Functions**





### 2 CPU Architecture

The typical architecture of a C500 family microcontroller is shown in **figure 2-1**. This block diagram includes all main functional blocks of the C500 microcontrollers. The shaded blocks are basic functional units which are mandatory for each C500 microcontroller. The other functional blocks such as XRAM, peripheral units, and ROM/RAM sizes are specific to each C500 microcontroller derivative.

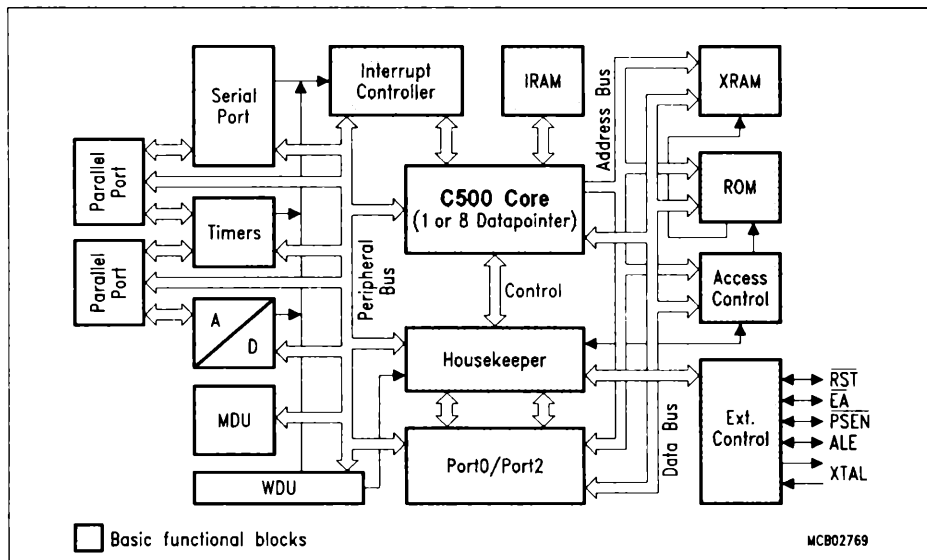

**Figure 2-1 :**  
**C500 Microcontroller Architecture Block Diagram**

The core block represents the CPU (Central Processing Unit) of the C500 family microcontrollers. The CPU consists of the instruction decoder, the arithmetic section, the CPU registers, and the program control section. The housekeeper unit generates internal signals for controlling the functions of the individual internal units within the microcontroller. Port 0 and port 2 are required for accessing external code and data memory and for emulation purposes. The external control signals and the clock generation are handled in the external control block. The access control unit is responsible for the selection of the on-chip memory resources. The IRAM provides the internal RAM which includes the general purpose registers. The interrupt requests from the peripheral units are handled by an interrupt controller unit.

C500 device specific is the configuration of the on-chip peripheral units. Serial interfaces, timers, capture/compare units, A/D converters, watchdog units, or a multiply/divide unit are typical examples for on-chip peripheral units. The external signals of these peripheral units are available at multifunctional parallel I/O ports or at dedicated pins.

The arithmetic section of the core performs extensive data manipulation and is comprised of the arithmetic/logic unit (ALU), an A register, B register and PSW register. Further, it has extensive facilities for binary and BCD arithmetic and excels in its bit-handling capabilities. Efficient use of program memory results from an instruction set consisting of 44% one-byte, 41% two-byte, and 15% three-byte instructions. The ALU accepts 8-bit data words from one or two sources and generates an 8-bit result under the control of the instruction decoder. The ALU performs the arithmetic operations add, subtract, multiply, divide, increment, decrement, BDC-decimal-add-adjust and compare, and the logic operations AND, OR, Exclusive OR, complement and rotate (right, left or swap nibble (left four)). Also included is a Boolean processor performing the bit operations as set, clear, complement, jump-if-not-set, jump-if-set-and-clear and move to/from carry. Between any addressable bit (or its complement) and the carry flag, it can perform the bit operations of logical AND or logical OR with the result returned to the carry flag.

The program control section of the core controls the sequence in which the instructions stored in program memory are executed. The 16-bit program counter (PC) holds the address of the next instruction to be executed. The conditional branch logic enables internal and external events to the processor to cause a change in the program execution sequence.

## **2.1 Accumulator**

ACC is the symbol for the accumulator register. The mnemonics for accumulator-specific instructions, however, refer to the accumulator simply as A.

## **2.2 B Register**

The B register is used during multiply and divide and serves as both source and destination. For other instructions it can be treated as another scratch pad register.

## **2.3 Program Status Word**

The Program Status Word (PSW) contains several status bits that reflect the current state of the CPU. The bits of the PSW are used for different functions which are: two register bank selection bits, two carry flags and an overflow flag for arithmetic instructions, a parity bit for the content of the ACC, and two general purpose flags.

The bit definitions of the PSW are shown on the next page.

### Special Function Register PSW (Address D0<sub>H</sub>)

Reset Value : 00<sub>H</sub>

Bit No.	MSB							LSB
	7	6	5	4	3	2	1	0
D0 <sub>H</sub>	CY	AC	F0	RS1	RS0	OV	F1	P
	PSW							

Bit	Function		
CY	Carry Flag Used by arithmetic and conditional branch instruction.		
AC	Auxiliary Carry Flag Used by instructions which execute BCD operations.		
F0	General Purpose Flag		
RS1 RS0	Register Bank select control bits These bits are used to select one of the four register banks.		
	RS1	RS0	Function
	0	0	Registerbank 0 at data address 00 <sub>H</sub> -07 <sub>H</sub> selected
	0	1	Registerbank 1 at data address 08 <sub>H</sub> -0F <sub>H</sub> selected
	1	0	Registerbank 2 at data address 10 <sub>H</sub> -17 <sub>H</sub> selected
	1	1	Registerbank 3 at data address 18 <sub>H</sub> -1F <sub>H</sub> selected
OV	Overflow Flag Used by arithmetic instruction.		
F1	General Purpose Flag		
P	Parity Flag Always set/cleared by hardware to indicate an odd/even number of "one" bits in the accumulator, i.e. even parity.		

## 2.4 Stack Pointer

The stack pointer (SP) register is 8 bits wide. It is incremented before data is stored during PUSH and CALL executions and decremented after data is popped during a POP and RET (RETI) execution, i.e. it always points to the last valid stack byte. While the stack may reside anywhere in the on-chip RAM, the stack pointer is initialized to 07<sub>H</sub> after a reset. This causes the stack to begin a location = 08<sub>H</sub> above register bank zero. The SP can be read or written under software control.

### 2.5 Data Pointer

8-bit accesses to the internal XRAM data memory or the external data memory are executed using the data pointer DPTR as an 16-bit address register. Normally, the C500 family microcontrollers have one data pointer. But some members of the C500 family provide eight data pointers. The availability of eight data pointers especially supports the programming in high level languages which have a demand to store data in large external data memory portions.

**Special Function Register DPL (Address 82<sub>H</sub>)**

**Reset Value : 00<sub>H</sub>**

**Special Function Register DPH (Address 83<sub>H</sub>)**

**Reset Value : 00<sub>H</sub>**

**Special Function Register DPSEL (Address D0<sub>H</sub>)**

**Reset Value : 00<sub>H</sub>**

	MSB							LSB	
Bit No.	7	6	5	4	3	2	1	0	
82 <sub>H</sub>	.7	.6	.5	.4	.3	.2	.1	LSB	DPL
83 <sub>H</sub>	MSB	.6	.5	.4	.3	.2	.1	.0	DPH
92 <sub>H</sub>	—	—	—	—	—	.2	.1	.0	DPSEL

Bit	Function			
–	Reserved bits for future use			
DPSEL.2 - 0	Data pointer select bits			
	DPSEL.2-0 defines the number of the actual active data pointer.DPTR0-7.			
	DPSEL2	DPSEL1	DPSEL0	Function
	0	0	0	Data pointer 0 selected
	0	0	1	Data pointer 1 selected
	0	1	0	Data pointer 2 selected
	0	1	1	Data pointer 3 selected
	1	0	0	Data pointer 4 selected
	1	0	1	Data pointer 5 selected
	1	1	0	Data pointer 6 selected
1	1	1	Data pointer 7 selected	

### 2.5.1 The Importance of Additional Datapointers

The standard 8051 architecture provides just one 16-bit pointer for indirect addressing of external devices (memories, peripherals, latches, etc.). Except for a 16-bit "move immediate" to this datapointer and an increment instruction, any other pointer handling is to be done byte by byte. For complex applications with peripherals located in the external data memory space (e.g. CAN controller) or extended data storage capacity this turned out to be a "bottle neck" for the 8051's communication to the external world. Especially programming in high-level languages (PLM51, C51, PASCAL51) requires extended RAM capacity and at the same time a fast access to this additional RAM because of the reduced code efficiency of these languages.

### 2.5.2 How the eight Datapointers of the C500 are realized


Simply adding more datapointers is not suitable because of the need to keep up 100% compatibility to the 8051 instruction set. This instruction set, however, allows the handling of only one single 16-bit datapointer (DPTR, consisting of the two 8-bit SFRs DPH and DPL).

To meet both of the above requirements (speed up external accesses, 100% compatibility to 8051 architecture) the C500 contains a set of eight 16-bit registers from which the actual datapointer can be selected.

This means that the user's program may keep up to eight 16-bit addresses resident in these registers, but only one register at a time is selected to be the datapointer. Thus the datapointer in turn is accessed (or selected) via indirect addressing. This indirect addressing is done through a special function register called DPSEL (data pointer select register). All instructions of the C500 which handle the datapointer therefore affect only one of the eight pointers which is addressed by DPSEL at that very moment.

**Figure 5-1** illustrates the addressing mechanism: a 3-bit field in register DPSEL points to the currently used DPTRx. Any standard 8051 instruction (e.g. MOVX @DPTR, A - transfer a byte from accumulator to an external location addressed by DPTR) now uses this activated DPTRx.



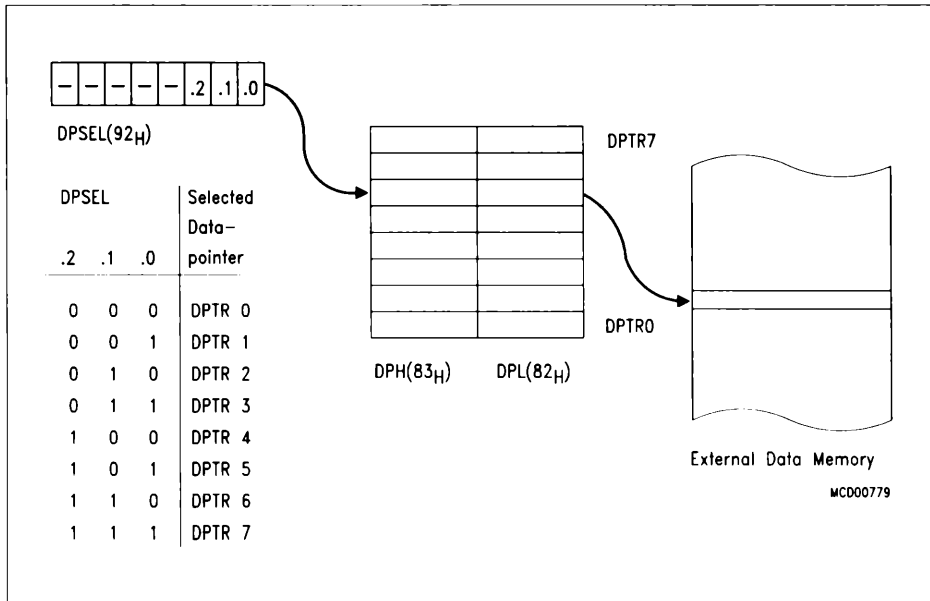

**Figure 2-2**  
**Accessing of External Data Memory via Multiple Datapointers**

### 2.5.3 Advantages of Multiple Datapointers

Using the above addressing mechanism for external data memory results in less code and faster execution of external accesses. Whenever the contents of the datapointer must be altered between two or more 16-bit addresses, one single instruction, which selects a new datapointer, does this job. If the program uses just one datapointer, then it has to save the old value (with two 8-bit instructions) and load the new address, byte by byte. This not only takes more time, it also requires additional space in the internal RAM.

### 2.5.4 Application Example and Performance Analysis

The following example shall demonstrate the involvement of multiple data pointers in a table transfer from the code memory to external data memory.

Start address of ROM source table: 1FFF<sub>H</sub>  
Start address of table in external RAM: 2FA0<sub>H</sub>

### Example 1 : Using only One Datapointer (Code for a C501)

#### Initialization Routine

```
MOV    LOW(SRC_PTR), #0FFH      ;Initialize shadow_variables with source_pointer
MOV    HIGH(SRC_PTR), #1FH
MOV    LOW(DES_PTR), #0A0H      ;Initialize shadow_variables with destination_pointer
MOV    HIGH(DES_PTR), #2FH
```

#### Table Look-up Routine under Real Time Conditions

			Number of cycles
		;	
PUSH	DPL	;Save old datapointer	2
PUSH	DPH	;	2
MOV	DPL, LOW(SRC_PTR)	;Load Source Pointer	2
MOV	DPH, HIGH(SRC_PTR)	;	2
;INC	DPTR	Increment and check for end of table (execution time	
;CJNE	...	not relevant for this consideration)	–
MOVC	A, @DPTR	;Fetch source data byte from ROM table	2
MOV	LOW(SRC_PTR), DPL	;Save source_pointer and	2
MOV	HIGH(SRC_PTR), DPH	;load destination_pointer	2
MOV	DPL, LOW(DES_PTR)	;	2
MOV	DPH, HIGH(DES_PTR)	;	2
INC	DPTR	;Increment destination_pointer	
		;(ex. time not relevant)	–
MOVX	@DPTR, A	;Transfer byte to destination address	2
MOV	LOW(DES_PTR), DPL	;Save destination_pointer	2
MOV	HIGH(DES_PTR), DPH	;	2
POP	DPH	;Restore old datapointer	2
POP	DPL	;	2
;		Total execution time (machine cycles) :	28

### Example 2 : Using Two Datapointers (Code for a C509)

#### Initialization Routine

```
MOV    DPSEL, #06H           ;Initialize DPTR6 with source pointer
MOV    DPTR, #1FFFH
MOV    DPSEL, #07H           ;Initialize DPTR7 with destination pointer
MOV    DPTR, #2FA0H
```

#### Table Look-up Routine under Real Time Conditions


		Number of cycles
	;	
PUSH	DPSEL	;Save old source pointer 2
MOV	DPSEL, #06H	;Load source pointer 2
;INC	DPTR	Increment and check for end of table (execution time
;CJNE	...	not relevant for this consideration) -
MOVC	A,@DPTR	;Fetch source data byte from ROM table 2
MOV	DPSEL, #07H	;Save source_pointer and
		;load destination_pointer 2
MOVX	@DPTR, A	;Transfer byte to destination address 2
POP	DPSEL	;Save destination pointer and
		;restore old datapointer 2
;	Total execution time (machine cycles) :	12

The above example shows that utilization of the C500's multiple datapointers can make external bus accesses two times as fast as with a standard 8051 or 8051 derivative. Here, four data variables in the internal RAM and two additional stack bytes were spared, too. This means for some applications where all eight datapointers are employed that an C500 program has up to 24 byte (16 variables and 8 stack bytes) of the internal RAM free for other use.

### 2.6 Enhanced Hooks Emulation Concept

The Enhanced Hooks Emulation Concept of the C500 microcontroller family is a new, innovative way to control the execution of C500 MCUs and to gain extensive information on the internal operation of the controllers. Emulation of on-chip ROM based programs is possible, too. Each production chip has built-in logic for the support of the Enhanced Hooks Emulation Concept. Therefore, no costly bond-out chips are necessary for emulation. This also ensure that emulation and production chips are identical.

The Enhanced Hooks Technology™, which requires embedded logic in the C500, allows the C500 together with an EH-IC to function similar to a bond-out chip. This simplifies the design and reduces costs of an ICE-system. ICE-systems using an EH-IC and a compatible C500 are able to emulate all operating modes of the different versions of the C500. This includes emulation of ROM, ROM with code rollover and ROMless modes of operation. It is also able to operate in single step mode and to read the SFRs after a break.

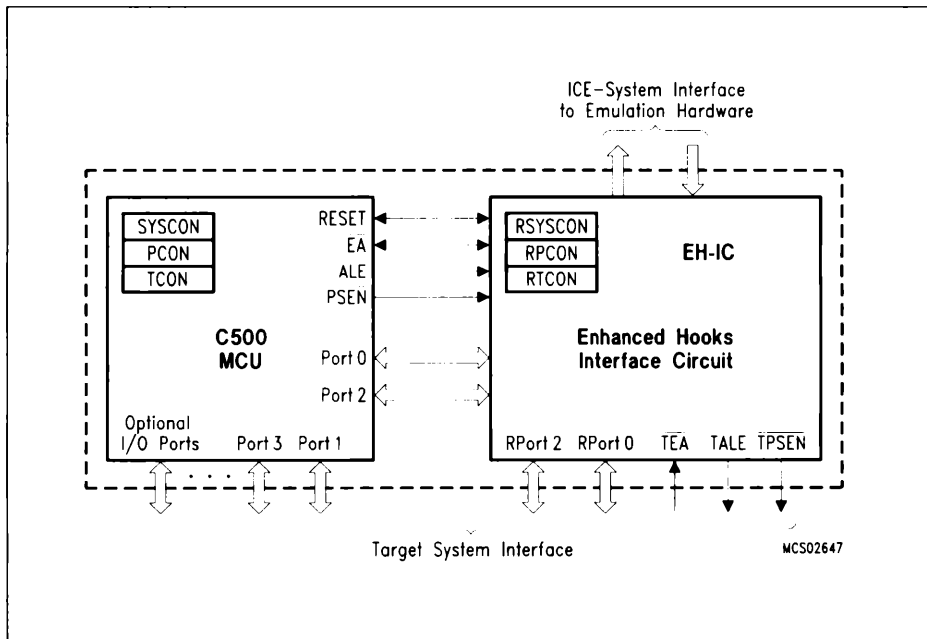


**Figure 2-3**  
**Basic C500 MCU Enhanced Hooks Concept Configuration**

Port 0, port 2 and some of the control lines of the C500 based MCU are used by Enhanced Hooks Emulation Concept to control the operation of the device during emulation and to transfer informations about the program execution and data transfer between the external emulation hardware (ICE-system) and the C500 MCU.

## 2.7 Basic Interrupt Handling

Each member of the C500 microcontroller family provides several interrupt sources. These interrupts are generated typically by external events or by the internal peripheral units. If an interrupt is accepted by the CPU, the microcontroller interrupts a running program and proceeds the program execution at an interrupt source specific vector address where the interrupt service routine is located. After the execution of a RETI (return from interrupt) instruction the program is continued at the point where it has been interrupted. **Figure 2-4** shows an example for the interrupt vector addresses of a C500 microcontroller (C501). Generally, interrupt vector addresses are located in the code memory area starting at address 0003<sub>H</sub>. The minimum distance between two consecutive vector addresses is always 8 bytes. Therefore, interrupt vectors can be assigned to the following addresses: 0003<sub>H</sub>, 000B<sub>H</sub>, 0013<sub>H</sub>, 001B<sub>H</sub>, 0023<sub>H</sub>, 002B<sub>H</sub>, 0033<sub>H</sub> ..... 00FB<sub>H</sub>.

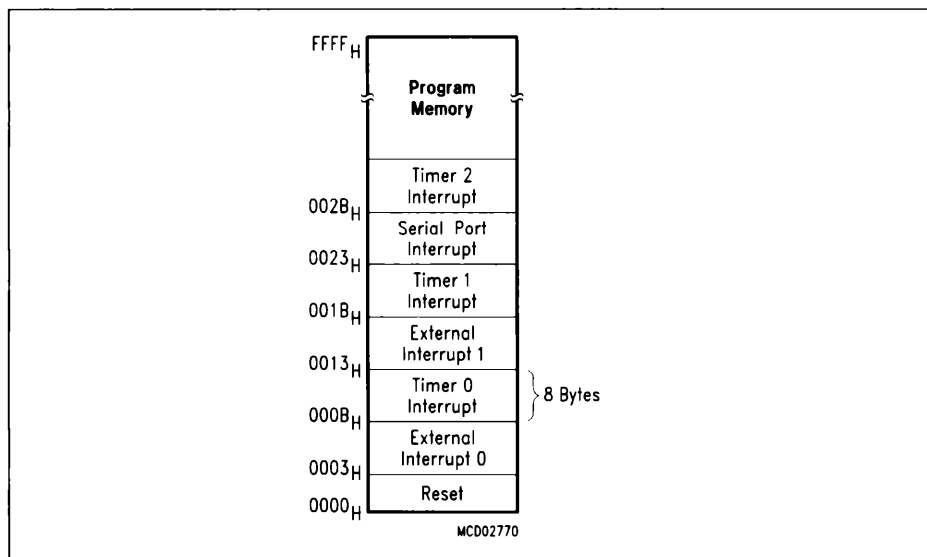

**Figure 2-4**  
**Interrupt Vector Addresses (Example of the C501)**


An interrupt source indicates to the interrupt controller an interrupt condition by setting an interrupt request flag. The interrupt request flags are sampled in each machine cycle. The sampled flags are polled during the following machine cycle. If one of the flags was in a set condition in the preceding cycle, the polling cycle will find it and the interrupt controller will cause the CPU to branch to the vector address of the appropriate service routine by generating an internal LCALL. This hardware-generated LCALL is blocked by any of the following conditions:

1. An interrupt of equal or higher priority is already in progress.
2. The current (polling) cycle is not in the final cycle of the instruction in progress.
3. The instruction in progress is RETI or any write access to interrupt enable or priority registers.

Any of these three conditions will block the generation of the LCALL to the interrupt service routine. Condition 2 ensures that the instruction in progress is completed before vectoring to any service routine. Condition 3 ensures that if the instruction in progress is RETI or any write access to interrupt enable or interrupt priority registers, then at least one more instruction will be executed before any interrupt is vectored too; this delay guarantees that changes of the interrupt status can be observed by the interrupt controller.

The polling cycle is repeated with each machine cycle, and the values polled are the values that were present at the previous machine cycle. Note that if any interrupt flag is active but not being responded to for one of the conditions already mentioned, or if the flag is no longer active when the blocking condition is removed, the denied interrupt will not be serviced. In other words, the fact that the interrupt flag was once active but not serviced is not remembered. Every polling cycle interrogates only the pending interrupt requests.

The polling cycle/LCALL sequence is illustrated in **figure 2-1**.

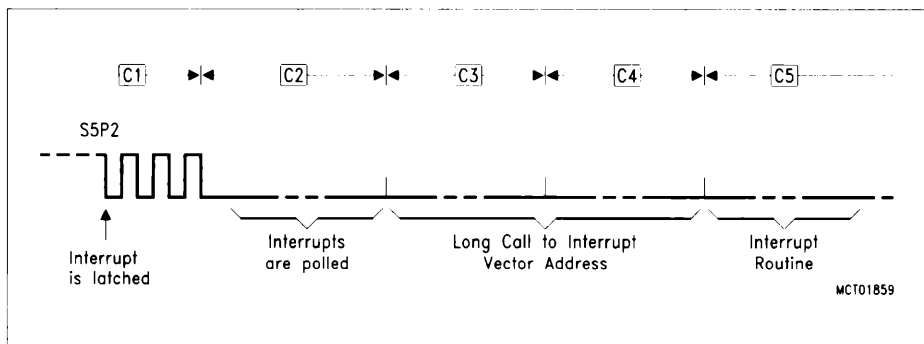

**Figure 2-5**  
**Interrupt Detection/Entry Diagram**

Note that if an interrupt of a higher priority level goes active prior to S5P2 in the machine cycle labeled C3 in **figure 2-5** then, in accordance with the above rules, it will be vectored to during C5 and C6 without any instruction for the lower priority routine to be executed.

Thus, the processor acknowledges an interrupt request by executing a hardware-generated LCALL to the appropriate servicing routine. In some cases it also clears the flag that generated the interrupt, while in other cases it does not; then this has to be done by the user's software.

The program execution proceeds from that location until the RETI instruction is encountered. The RETI instruction informs the processor that the interrupt routine is no longer in progress, then pops the two top bytes from the stack and reloads the program counter. Execution of the interrupted program continues from the point where it was stopped. Note that the RETI instruction is very important because it informs the processor that the program left the current interrupt priority level. A simple RET instruction would also have returned execution to the interrupted program, but it would have left the interrupt control system thinking an interrupt was still in progress. In this case no interrupt of the same or lower priority level would be acknowledged.

## **2.8 Interrupt Response Time**

If an external interrupt is recognized, its corresponding request flag is set at S5P2 in every machine cycle. The value is not polled by the circuitry until the next machine cycle. If the request is active and conditions are right for it to be acknowledged, a hardware subroutine call to the requested service routine will be next instruction to be executed. The call itself takes two cycles. Thus a minimum of three complete machine cycles will elapse between activation and external interrupt request and the beginning of execution of the first instruction of the service routine.

A longer response time would be obtained if the request was blocked by one of the three previously listed conditions. If an interrupt of equal or higher priority is already in progress, the additional wait time obviously depends on the nature of the other interrupt's service routine. If the instruction in progress is not in its final cycle, the additional wait time cannot be more than 3 cycles since the longest instructions (MUL and DIV) are only 4 cycles long; and, if the instruction in progress is RETI or a write access to interrupt enable or interrupt priority registers the additional wait time cannot be more than 5 cycles (a maximum of one more cycle to complete the instruction in progress, plus 4 cycles to complete the next instruction, if the instruction is MUL or DIV).

Thus a single interrupt system, the response time is always more than 3 cycles and less than 9 cycles.

**CPU Timing**







## 3 CPU Timing

### 3.1 Basic Timing


A machine cycle consists of 6 states. Each state is divided into a phase 1 half, during which the phase 1 clock is active, and a phase 2 half, during which the phase 2 clock is active. Thus, a machine cycle consists of the states S1P1 (state 1, phase 1) through S6P2 (state 6, phase 2). Depending on the C500 type of microcontroller, each state lasts either one or two periods of the oscillator clock. Typically, arithmetic and logical operations take place during phase 1 and internal register-to-register transfers take place during phase 2.

The diagrams in **figure 3-1** show the fetch/execute timing related to the internal states and phases. Since these internal clock signals are not user-accessible, the ALE (address latch enable) signal is shown for external reference. ALE is normally activated twice during each machine cycle: once during S1P2 and S2P1, and again during S4P2 and S5P1.

The execution of a one-cycle instruction begins at S1P2, when the opcode is latched into the instruction register. If it is a two-byte instruction, the second reading takes place during S4 of the same machine cycle. If it is a one-byte instruction, there is still a fetch at S4, but the byte read (which would be the next op-code) is ignored (discarded fetch), and the program counter is not incremented. In any case, execution is completed at the end of S6P2.

**Figures 3-1 (a) and (b)** show the timing of a 1-byte, 1-cycle instruction and for a 2-byte, 1-cycle instruction.

Most C500 instructions are executed in one cycle. MUL (multiply) and DIV (divide) are the only instructions that take more than two cycles to complete; they take four cycles. Normally two code bytes are fetched from the program memory during every machine cycle. The only exception to this is when a MOVX instruction is executed. MOVX is a one-byte, 2-cycle instruction that accesses external data memory. During a MOVX, the two fetches in the second cycle are skipped while the external data memory is being addressed and strobed. **Figure 3-1 (c) and (d)** show the timing for a normal 1-byte, 2-cycle instruction and for a MOVX instruction.

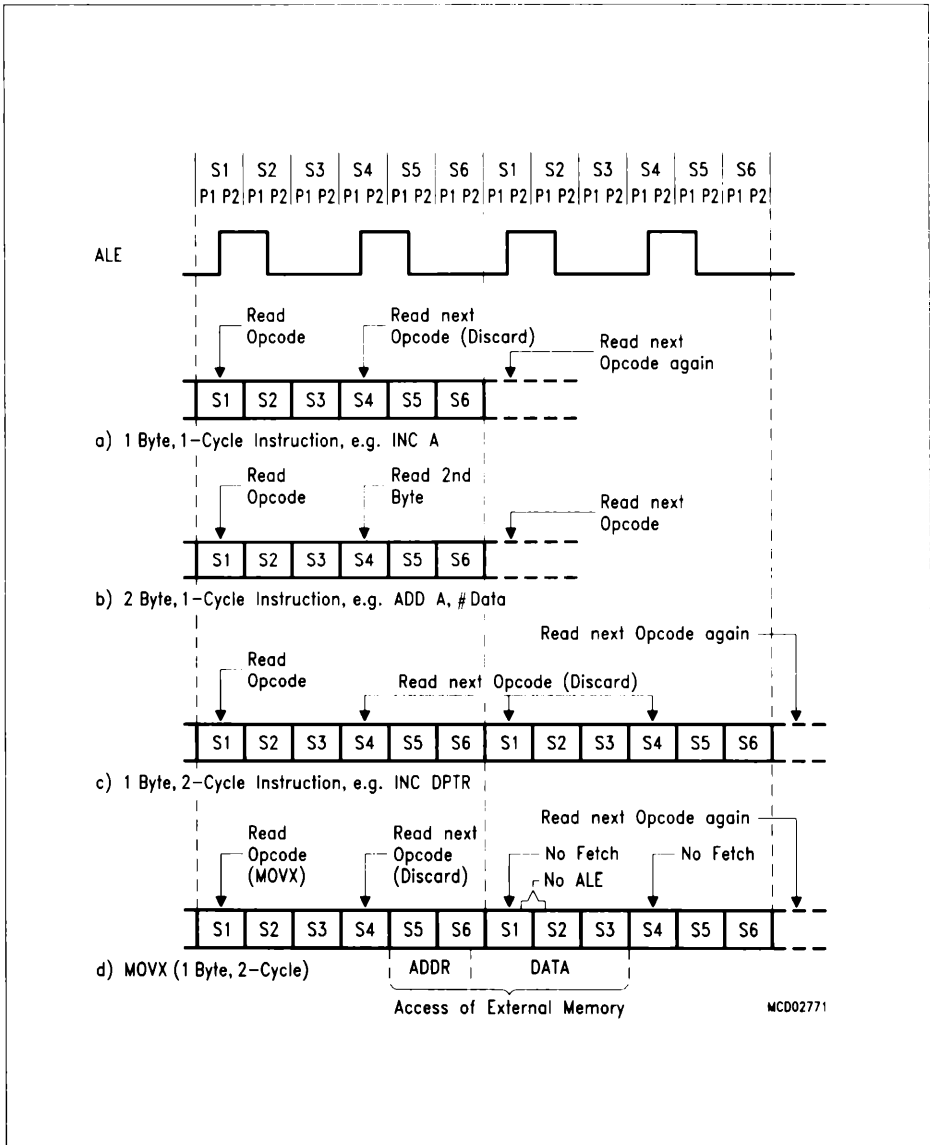

**Figure 3-1**  
**Fetch Execute Sequence**

## 3.2 Accessing External Memory

There are two types of external memory accesses: accesses to external program memory and accesses to external data memory. Accesses to external program memory use the signal  $\overline{\text{PSEN}}$  (program store enable) as the read strobe. Accesses to external data memory use the  $\overline{\text{RD}}$  or  $\overline{\text{WR}}$  (alternate functions of P3.7 and P3.6) to access the memory.

Fetches from external program memory always use a 16-bit address. Accesses to external data memory can use either a 16-bit address ( $\text{MOVX } @\text{DPTR}$ ) or an 8-bit address ( $\text{MOVX } @\text{Ri}$ ). Whenever a 16-bit address is used, the high byte of the address comes out on port 2, where it is held for the duration of the read, write, or code fetch cycle.

If an 8-bit address is being used ( $\text{MOVX } @\text{Ri}$ ), the contents of the port 2 SFR remain at the port 2 pins throughout the whole external memory cycle. In this case, port 2 pins can be used to page the external data memory.

In either case, the low byte of the address is time-multiplexed with the data byte on port 0. The ADDRESS/DATA signal drives both FETS in the port 0 output buffers. Thus, in external bus mode the port 0 pins are not open-drain outputs and do not require external pullups. The ALE (address latch enable) signal should be used to latch the address byte into an external latch. The address byte is valid at the negative transition of ALE. Then, in a write cycle, the data byte to be written appears on port 0 just before  $\overline{\text{WR}}$  is activated, and remains there until  $\overline{\text{WR}}$  is deactivated. In a read cycle, the incoming byte is accepted at port 0 just before the read strobe ( $\overline{\text{RD}}$ ) is deactivated.

During any access to external memory, the CPU writes  $\text{FF}_{\text{H}}$  to the port 0 latch (the special function register), thus obliterating the information in the port 0 SFR. Also, a  $\text{MOV P0}$  instruction must not take place during external memory accesses. If the user writes to port 0 during an external memory fetch, the incoming code byte may be corrupted. Therefore, do not write to port 0 if external memory is used.


### 3.2.1 Accessing External Program Memory

External program memory is accessed under two conditions:

1. Whenever signal  $\overline{\text{EA}}$  is active (low), or
2. Whenever signal  $\overline{\text{EA}}$  is inactive (high) and the program counter (PC) contains an address greater than the internal ROM size (e.g.  $1\text{FFFF}_{\text{H}}$  for an 8K internal ROM or  $3\text{FFF}_{\text{H}}$  for an 16K internal ROM).

This requires that the ROMless versions have always  $\overline{\text{EA}}$  wired to  $\text{V}_{\text{SS}}$  to enable the lower 8K, 16K, or 32K program bytes to be fetched from external memory.

When the CPU is executing out from external program memory (see timing diagram in **figure 3-2**), all 8 bits of port 2 are dedicated to an output function and may not be used for general purpose I/O. During external program fetches they output the high byte of the PC with the port 2 drivers using the strong pullups to emit bits that are 1's.

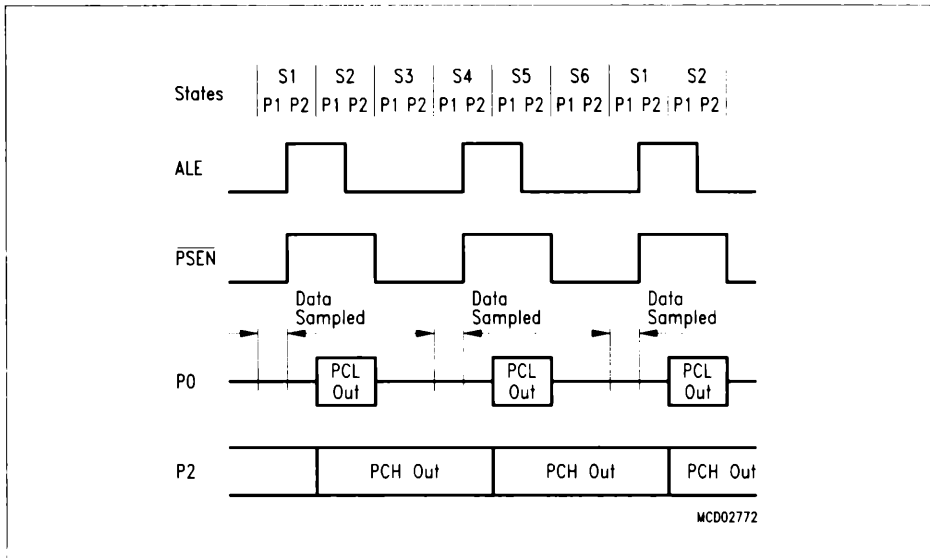


**Figure 3-2**  
**External Program Memory Fetches**


### 3.2.2 Accessing External Data Memory

The port 2 drivers use the strong pullups during the entire time that they are emitting address bits that are 1's. This occurs when the MOVX @DPTR instruction is executed and when external program fetches are executed. During this time the port 2 latch (the special function register) does not have to contain 1's, and the contents of the port 2 SFR are not modified. If the external memory cycle is not immediately followed by another external memory cycle, the undisturbed contents of the port 2 SFR will reappear in the next cycle.

**Figure 3-3** and **3-4** show in detail the timings of the external data memory read and write cycles.

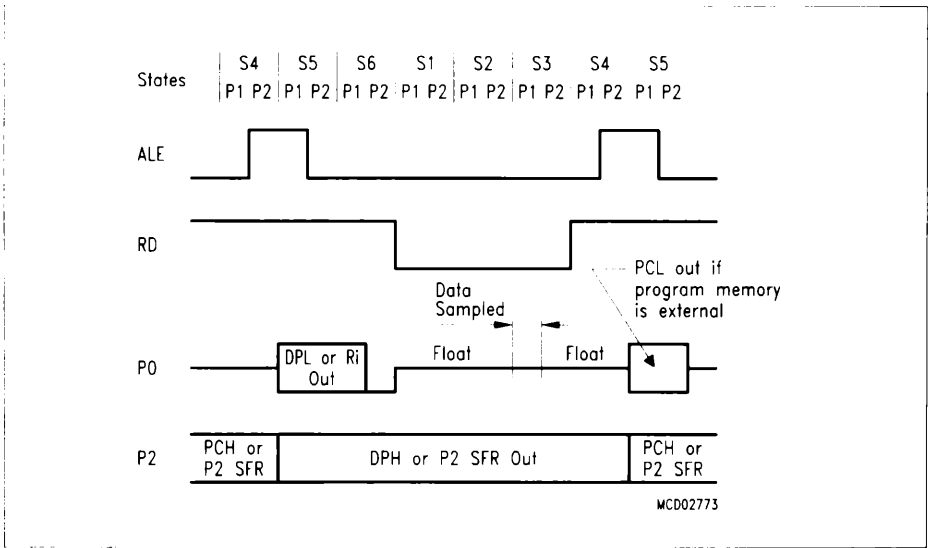

**Figure 3-3**  
**External Data Memory Read Cycle**

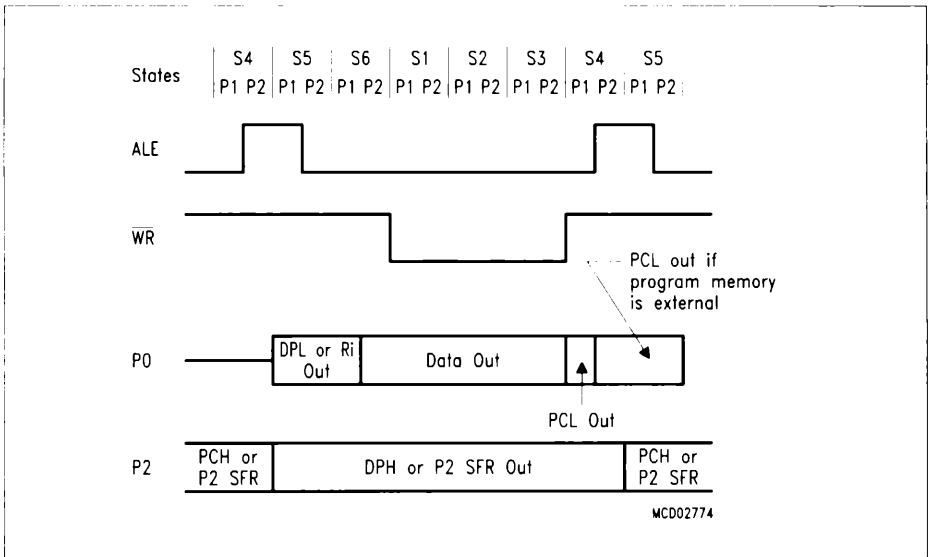

**Figure 3-4**  
**External Data Memory Write Cycle**



**Instruction Set**







### 4 Instruction Set

The C500 8-bit microcontroller family instruction set includes 111 instructions, 49 of which are single-byte, 45 two-byte and 17 three-byte instructions. The instruction opcode format consists of a function mnemonic followed by a "destination, source" operand field. This field specifies the data type and addressing method(s) to be used.

Like all other members of the 8051-family, the C500 microcontrollers can be programmed with the same instruction set common to the basic member, the SAB 8051.

Thus, the C500 family microcontrollers are 100% software compatible to the SAB 8051 and may be programmed with 8051 assembler or high-level languages.

#### 4.1 Addressing Modes

The C500 uses five addressing modes:

- register
- direct
- immediate
- register indirect
- base register plus index-register indirect

**Table 4-1** summarizes the memory spaces which may be accessed by each of the addressing modes.

#### Register Addressing

Register addressing accesses the eight working registers (R0 - R7) of the selected register bank. The least significant bit of the instruction opcode indicates which register is to be used. ACC, B, DPTR and CY, the Boolean processor accumulator, can also be addressed as registers.

#### Direct Addressing

Direct addressing is the only method of accessing the special function registers. The lower 128 bytes of internal RAM are also directly addressable.

#### Immediate Addressing

Immediate addressing allows constants to be part of the instruction in program memory.

**Table 4-1**  
**Addressing Modes and Associated Memory Spaces**

Addressing Modes	Associated Memory Spaces
Register addressing	R0 through R7 of selected register bank, ACC, B, CY (Bit), DPTR
Direct addressing	Lower 128 bytes of internal RAM, special function registers
Immediate addressing	Program memory
Register indirect addressing	Internal RAM (@R1, @R0, SP), external data memory (@R1, @R0, @DPTR)
Base register plus index register addressing	Program memory (@A + DPTR, @A + PC)

### Register Indirect Addressing

Register indirect addressing uses the contents of either R0 or R1 (in the selected register bank) as a pointer to locations in a 256-byte block: the 256 bytes of internal RAM or the lower 256 bytes of external data memory. Note that the special function registers are not accessible by this method. The upper half of the internal RAM can be accessed by indirect addressing only. Access to the full 64 Kbytes of external data memory address space is accomplished by using the 16-bit data pointer. Execution of PUSH and POP instructions also uses register indirect addressing. The stack may reside anywhere in the internal RAM.

### Base Register plus Index Register Addressing

Base register plus index register addressing allows a byte to be accessed from program memory via an indirect move from the location whose address is the sum of a base register (DPTR or PC) and index register, ACC. This mode facilitates look-up table accesses.

### Boolean Processor

The Boolean processor is a bit processor integrated into the C500 family microcontrollers. It has its own instruction set, accumulator (the carry flag), bit-addressable RAM and I/O.

The bit manipulation instructions allow:

- set bit
- clear bit
- complement bit
- jump if bit is set
- jump if bit is not set
- jump if bit is set and clear bit
- move bit from / to carry

Addressable bits, or their complements, may be logically AND-ed or OR-ed with the contents of the carry flag. The result is returned to the carry register.

### 4.2 Introduction to the Instruction Set

The instruction set is divided into four functional groups:

- data transfer
- arithmetic
- logic
- control transfer

#### 4.2.1 Data Transfer Instructions

Data transfer operations are divided into three classes:

- general-purpose
- accumulator-specific
- address-object

None of these operations affects the PSW flag settings except a POP or MOV directly to the PSW.

#### General-Purpose Transfers

- MOV performs a bit or byte transfer from the source operand to the destination operand.
- PUSH increments the SP register and then transfers a byte from the source operand to the stack location currently addressed by SP.
- POP transfers a byte operand from the stack location addressed by the SP to the destination operand and then decrements SP.

#### Accumulator-Specific Transfers

- XCH exchanges the byte source operand with register A (accumulator).
- XCHD exchanges the low-order nibble of the source operand byte with the low-order nibble of A.
- MOVX performs a byte move between the external data memory and the accumulator. The external address can be specified by the DPTR register (16 bit) or the R1 or R0 register (8 bit).
- MOVC moves a byte from program memory to the accumulator. The operand in A is used as an index into a 256-byte table pointed to by the base register (DPTR or PC). The byte operand accessed is transferred to the accumulator.

#### Address-Object Transfer

- MOV DPTR, #data loads 16 bits of immediate data into a pair of destination registers, DPH and DPL.

### **4.2.2 Arithmetic Instructions**

The C500 family microcontrollers have four basic mathematical operations. Only 8-bit operations using unsigned arithmetic are supported directly. The overflow flag, however, permits the addition and subtraction operation to serve for both unsigned and signed binary integers. Arithmetic can also be performed directly on packed BCD representations.

#### **Addition**

- INC (increment) adds one to the source operand and puts the result in the operand (flags in PSW are not affected).
- ADD adds A to the source operand and returns the result to A.
- ADDC (add with carry) adds A and the source operand, then adds one (1) if CY is set, and puts the result in A.
- DA (decimal-add-adjust for BCD addition) corrects the sum which results from the binary addition of two-digit decimal operands. The packed decimal sum formed by DA is returned to A. CY is set if the BCD result is greater than 99; otherwise, it is cleared.

#### **Subtraction**

- SUBB (subtract with borrow) subtracts the second source operand from the first operand (the accumulator), subtracts one (1) if CY is set and returns the result to A.
- DEC (decrement) subtracts one (1) from the source operand and returns the result to the operand (flags in PSW are not affected).

#### **Multiplication**

- MUL performs an unsigned multiplication of the A register by the B register, returning a double byte result. A receives the low-order byte, B receives the high-order byte. OV is cleared if the top half of the result is zero and is set if it is not zero. CY is cleared. AC is unaffected.

#### **Division**

- DIV performs an unsigned division of the A register by the B register; it returns the integer quotient to the A register and returns the fractional remainder to the B register. Division by zero leaves indeterminate data in registers A and B and sets OV; otherwise, OV is cleared. CY is cleared. AC remains unaffected.

#### **Flags**

Unless otherwise stated in the previous descriptions, the flags of PSW are affected as follows:

- CY is set if the operation causes a carry to or a borrow from the resulting high-order bit; otherwise CY is cleared.
- AC is set if the operation results in a carry from the low-order four bits of the result (during addition), or a borrow from the high-order bits to the low-order bits (during subtraction); otherwise AC is cleared.
- OV is set if the operation results in a carry to the high-order bit of the result but not a carry from the bit, or vice versa; otherwise OV is cleared. OV is used in two's-complement arithmetic, because it is set when the signal result cannot be represented in 8 bits.
- P is set if the modulo-2 sum of the eight bits in the accumulator is 1 (odd parity); otherwise P is cleared (even parity). When a value is written to the PSW register, the P bit remains unchanged, as it always reflects the parity of A.

### 4.2.3 Logic Instructions

The C500 family microcontrollers perform basic logic operations on both bit and byte operands.

#### Single-Operand Operations

- CLR sets A or any directly addressable bit to zero (0).
- SETB sets any directly bit-addressable bit to one (1).
- CPL is used to complement the contents of the A register without affecting any flag, or any directly addressable bit location.
- RL, RLC, RR, RRC, SWAP are the five operations that can be performed on A. RL, rotate left, RR, rotate right, RLC, rotate left through carry, RRC, rotate right through carry, and SWAP, rotate left four. For RLC and RRC the CY flag becomes equal to the last bit rotated out. SWAP rotates A left four places to exchange bits 3 through 0 with bits 7 through 4.

#### Two-Operand Operations

- ANL performs bitwise logical AND of two operands (for both bit and byte operands) and returns the result to the location of the first operand.
- ORL performs bitwise logical OR of two source operands (for both bit and byte operands) and returns the result to the location of the first operand.
- XRL performs logical Exclusive OR of two source operands (byte operands) and returns the result to the location of the first operand.

### 4.2.4 Control Transfer Instructions

There are three classes of control transfer operations: unconditional calls, returns, jumps, conditional jumps, and interrupts. All control transfer operations, some upon a specific condition, cause the program execution to continue a non-sequential location in program memory.

**Unconditional Calls, Returns and Jumps**

Unconditional calls, returns and jumps transfer control from the current value of the program counter to the target address. Both direct and indirect transfers are supported.

- ACALL and LCALL push the address of the next instruction onto the stack and then transfer control to the target address. ACALL is a 2-byte instruction used when the target address is in the current 2K page. LCALL is a 3-byte instruction that addresses the full 64K program space. In ACALL, immediate data (i.e. an 11-bit address field) is concatenated to the five most significant bits of the PC (which is pointing to the next instruction). If ACALL is in the last 2 bytes of a 2K page then the call will be made to the next page since the PC will have been incremented to the next instruction prior to execution.
- RET transfers control to the return address saved on the stack by a previous call operation and decrements the SP register by two (2) to adjust the SP for the popped address.
- AJMP, LJMP and SJMP transfer control to the target operand. The operation of AJMP and LJMP are analogous to ACALL and LCALL. The SJMP (short jump) instruction provides for transfers within a 256-byte range centered about the starting address of the next instruction (– 128 to + 127).
- JMP @A + DPTR performs a jump relative to the DPTR register. The operand in A is used as the offset (0 - 255) to the address in the DPTR register. Thus, the effective destination for a jump can be anywhere in the program memory space.

**Conditional Jumps**

Conditional jumps perform a jump contingent upon a specific condition. The destination will be within a 256-byte range centered about the starting address of the next instruction (– 128 to + 127).

- JZ performs a jump if the accumulator is zero.
- JNZ performs a jump if the accumulator is not zero.
- JC performs a jump if the carry flag is set.
- JNC performs a jump if the carry flag is not set.
- JB performs a jump if the directly addressed bit is set.
- JNB performs a jump if the directly addressed bit is not set.
- JBC performs a jump if the directly addressed bit is set and then clears the directly addressed bit.
- CJNE compares the first operand to the second operand and performs a jump if they are not equal. CY is set if the first operand is less than the second operand; otherwise it is cleared. Comparisons can be made between A and directly addressable bytes in internal data memory or an immediate value and either A, a register in the selected register bank, or a register indirectly addressable byte of the internal RAM.
- DJNZ decrements the source operand and returns the result to the operand. A jump is performed if the result is not zero. The source operand of the DJNZ instruction may be any directly addressable byte in the internal data memory. Either direct or register addressing may be used to address the source operand.

**Interrupt Returns**

- RETI transfers control as RET does, but additionally enables interrupts of the current priority level.

### 4.3 Instruction Definitions

All 111 instructions of the C500 family microcontrollers can essentially be condensed to 53 basic operations, in the following alphabetically ordered according to the operation mnemonic section.

**Table 4-2**  
**PSW Flag Modification (CY,OV,AC)**

Instruction	Flag			Instruction	Flag		
	CY	OV	AC		CY	OV	AC
ADD	X	X	X	SETB C	1		
ADDC	X	X	X	CLR C	0		
SUBB	X	X	X	CPL C	X		
MUL	0	X		ANL C,bit	X		
DIV	0	X		ANL C,/bit	X		
DA	X			ORL C,bit	X		
RRC	X			ORL C,/bit	X		
RLC	X			MOV C,bit	X		
CJNE	X						

A brief example of how the instruction might be used is given as well as its effect on the PSW flags. The number of bytes and machine cycles required, the binary machine language encoding, and a symbolic description or restatement of the function is also provided.

#### Note:

Only the carry, auxiliary carry, and overflow flags are discussed. The parity bit is always computed from the actual content of the accumulator.

Similarly, instructions which alter directly addressed registers could affect the other status flags if the instruction is applied to the PSW. Status flags can also be modified by bit manipulation.



### Notes on Data Addressing Modes:

- Rn - Working register R0-R7
- direct - 128 internal RAM locations, any I/O port, control or status register
- @Ri - Indirect internal or external RAM location addressed by register R0 or R1
- #data - 8-bit constant included in instruction
- #data 16 - 16-bit constant included as bytes 2 and 3 of instruction
- bit - 128 software flags, any bit-addressable I/O pin, control or status bit
- A - Accumulator

### Notes on Program Addressing Modes:

- addr16 - Destination address for LCALL and LJMP may be anywhere within the 64-Kbyte program memory address space.
- addr11 - Destination address for ACALL and AJMP will be within the same 2-Kbyte page of program memory as the first byte of the following instruction.
- rel - SJMP and all conditional jumps include an 8-bit offset byte. Range is + 127/- 128 bytes relative to the first byte of the following instruction.

All mnemonics copyrighted: © Intel Corporation 1980

### ACALL addr11

Function: Absolute call

Description: ACALL unconditionally calls a subroutine located at the indicated address. The instruction increments the PC twice to obtain the address of the following instruction, then pushes the 16-bit result onto the stack (low-order byte first) and increments the stack pointer twice. The destination address is obtained by successively concatenating the five high-order bits of the incremented PC, op code bits 7-5, and the second byte of the instruction. The subroutine called must therefore start within the same 2K block of program memory as the first byte of the instruction following ACALL. No flags are affected.

Example: Initially SP equals 07<sub>H</sub>. The label "SUBRTN" is at program memory location 0345<sub>H</sub>. After executing the instruction

ACALL SUBRTN

at location 0123<sub>H</sub>, SP will contain 09<sub>H</sub>, internal RAM location 08<sub>H</sub> and 09<sub>H</sub> will contain 25<sub>H</sub> and 01<sub>H</sub>, respectively, and the PC will contain 0345<sub>H</sub>.

Operation: ACALL  
 $(PC) \leftarrow (PC) + 2$   
 $(SP) \leftarrow (SP) + 1$   
 $((SP)) \leftarrow (PC7-0)$   
 $(SP) \leftarrow (SP) + 1$   
 $((SP)) \leftarrow (PC15-8)$   
 $(PC10-0) \leftarrow \text{page address}$

Encoding: 

a10	a9	a8	1	0	0	0	1
-----	----	----	---	---	---	---	---

a7	a6	a5	a4	a3	a2	a1	a0
----	----	----	----	----	----	----	----

Bytes: 2

Cycles: 2

### ADD A, <src-byte>

Function: Add

Description: ADD adds the byte variable indicated to the accumulator, leaving the result in the accumulator. The carry and auxiliary carry flags are set, respectively, if there is a carry out of bit 7 or bit 3, and cleared otherwise. When adding unsigned integers, the carry flag indicates an overflow occurred.

OV is set if there is a carry out of bit 6 but not out of bit 7, or a carry out of bit 7 but not out of bit 6; otherwise OV is cleared. When adding signed integers, OV indicates a negative number produced as the sum of two positive operands, or a positive sum from two negative operands.

Four source operand addressing modes are allowed: register, direct, register-indirect, or immediate.

Example: The accumulator holds 0C3<sub>H</sub> (11000011<sub>B</sub>) and register 0 holds 0AA<sub>H</sub> (10101010<sub>B</sub>).

The instruction

ADD A,R0

will leave 6D<sub>H</sub> (01101101<sub>B</sub>) in the accumulator with the AC flag cleared and both the carry flag and OV set to 1.

### ADD A,Rn

Operation: ADD  
(A) ← (A) + (Rn)

Encoding: 

0 0 1 0	1 r r r
---------	---------

Bytes: 1

Cycles: 1

### ADD A,direct

Operation: ADD  
(A) ← (A) + (direct)

Encoding: 

0 0 1 0	0 1 0 1
---------	---------

direct address

Bytes: 2

Cycles: 1

### **ADD      A, @Ri**

Operation:      ADD  
                    $(A) \leftarrow (A) + ((Ri))$

Encoding:      0 0 1 0 | 0 1 1 i

Bytes:          1

Cycles:        1

### **ADD      A, #data**

Operation:      ADD  
                    $(A) \leftarrow (A) + \#data$

Encoding:      0 0 1 0 | 0 1 0 0 | immediate data

Bytes:          2

Cycles:        1

### **ADDC    A, < src-byte>**

**Function:**        Add with carry

**Description:**    ADDC simultaneously adds the byte variable indicated, the carry flag and the accumulator contents, leaving the result in the accumulator. The carry and auxiliary carry flags are set, respectively, if there is a carry out of bit 7 or bit 3, and cleared otherwise. When adding unsigned integers, the carry flag indicates an overflow occurred.

OV is set if there is a carry out of bit 6 but not out of bit 7, or a carry out of bit 7 but not out of bit 6; otherwise OV is cleared. When adding signed integers, OV indicates a negative number produced as the sum of two positive operands or a positive sum from two negative operands.

Four source operand addressing modes are allowed: register, direct, register-indirect, or immediate.

**Example:**        The accumulator holds 0C3<sub>H</sub> (11000011<sub>B</sub>) and register 0 holds 0AA<sub>H</sub> (10101010<sub>B</sub>) with the carry flag set. The instruction

ADDC    A,R0

will leave 6E<sub>H</sub> (01101110<sub>B</sub>) in the accumulator with AC cleared and both the carry flag and OV set to 1.

### **ADDC    A,Rn**

**Operation:**        ADDC  
                       (A) ← (A) + (C) + (Rn)

**Encoding:**

0	0	1	1
---	---	---	---

1	r	r	r
---	---	---	---

**Bytes:**            1

**Cycles:**           1

### **ADDC    A,direct**

**Operation:**        ADDC  
                       (A) ← (A) + (C) + (direct)

**Encoding:**

0	0	1	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

**Bytes:**            2

**Cycles:**           1

### ADDC A, @Ri

Operation:     ADDC  
                    $(A) \leftarrow (A) + (C) + ((Ri))$

Encoding:     

0	0	1	1	0	1	i
---	---	---	---	---	---	---

Bytes:         1

Cycles:        1

### ADDC A, #data

Operation:     ADDC  
                    $(A) \leftarrow (A) + (C) + \#data$

Encoding:     

0	0	1	1	0	1	0	0
---	---	---	---	---	---	---	---

immediate data
----------------

Bytes:         2

Cycles:        1

### AJMP      addr11

Function:      Absolute jump

Description:    AJMP transfers program execution to the indicated address, which is formed at run-time by concatenating the high-order five bits of the PC (*after* incrementing the PC twice), op code bits 7-5, and the second byte of the instruction. The destination must therefore be within the same 2K block of program memory as the first byte of the instruction following AJMP.

Example:        The label "JMPADR" is at program memory location 0123<sub>H</sub>. The instruction

AJMP      JMPADR

is at location 0345<sub>H</sub> and will load the PC with 0123<sub>H</sub>.

Operation:      **AJM P**  
                     (PC) ← (PC) + 2  
                     (PC10-0) ← page address

Encoding:      

a10	a9	a8	0	0	0	0	1
-----	----	----	---	---	---	---	---

a7	a6	a5	a4	a3	a2	a1	a0
----	----	----	----	----	----	----	----

Bytes:            2

Cycles:          2

### ANL <dest-byte>, <src-byte>

**Function:** Logical AND for byte variables

**Description:** ANL performs the bitwise logical AND operation between the variables indicated and stores the results in the destination variable. No flags are affected.

The two operands allow six addressing mode combinations. When the destination is a accumulator, the source can use register, direct, register-indirect, or immediate addressing; when the destination is a direct address, the source can be the accumulator or immediate data.

#### Note:

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, not the input pins.

**Example:** If the accumulator holds 0C3<sub>H</sub> (11000011<sub>B</sub>) and register 0 holds 0AA<sub>H</sub> (10101010<sub>B</sub>) then the instruction

```
ANL    A,R0
```

will leave 81<sub>H</sub> (10000001<sub>B</sub>) in the accumulator.

When the destination is a directly addressed byte, this instruction will clear combinations of bits in any RAM location or hardware register. The mask byte determining the pattern of bits to be cleared would either be a constant contained in the instruction or a value computed in the accumulator at run-time.

The instruction

```
ANL    P1, #01110011B
```

will clear bits 7, 3, and 2 of output port 1.

### ANL A,Rn

**Operation:** ANL  
 $(A) \leftarrow (A) \wedge (Rn)$

**Encoding:**

0	1	0	1
---	---	---	---

1	r	r	r
---	---	---	---

**Bytes:** 1

**Cycles:** 1

### ANL A,direct

**Operation:** ANL  
 $(A) \leftarrow (A) \wedge (\text{direct})$

**Encoding:**

0	1	0	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

**Bytes:** 2

**Cycles:** 1



### **ANL      A, @Ri**

Operation:     ANL  
                   $(A) \leftarrow (A) \wedge ((Ri))$

Encoding:     

0	1	0	1
---	---	---	---

0	1	1	i
---	---	---	---

Bytes:         1

Cycles:        1

### **ANL      A, #data**

Operation:     ANL  
                   $(A) \leftarrow (A) \wedge \#data$

Encoding:     

0	1	0	1
---	---	---	---

0	1	0	0
---	---	---	---

Bytes:         2

Cycles:        1

### **ANL      direct,A**

Operation:     ANL  
                   $(direct) \leftarrow (direct) \wedge (A)$

Encoding:     

0	1	0	1
---	---	---	---

0	1	0	1
---	---	---	---

Bytes:         2

Cycles:        1

### ANL      direct, #data

Operation:    ANL  
                   $(\text{direct}) \leftarrow (\text{direct}) \wedge \#data$

Encoding:    

0	1	0	1
---	---	---	---

0	0	1	1
---	---	---	---

direct address
----------------

immediate data
----------------

Bytes:        3

Cycles:       2

### ANL C, <src-bit>

Function: Logical AND for bit variables

Description: If the Boolean value of the source bit is a logic 0 then clear the carry flag; otherwise leave the carry flag in its current state. A slash ("/" preceding the operand in the assembly language indicates that the logical complement of the addressed bit is used as the source value, *but the source bit itself is not affected*. No other flags are affected.

Only direct bit addressing is allowed for the source operand.

Example: Set the carry flag if, and only if, P1.0 = 1, ACC.7 = 1, and OV = 0:

```
MOV    C,P1.0           ; Load carry with input pin state
ANL    C,ACC.7          ; AND carry with accumulator bit 7
ANL    C,/OV            ; AND with inverse of overflow flag
```

### ANL C,bit

Operation: ANL  
 $(C) \leftarrow (C) \wedge (\text{bit})$

Encoding: 

1	0	0	0
---	---	---	---

0	0	1	0
---	---	---	---

bit address
-------------

Bytes: 2

Cycles: 2

### ANL C,/bit

Operation: ANL  
 $(C) \leftarrow (C) \wedge /(\text{bit})$

Encoding: 

1	0	1	1
---	---	---	---

0	0	0	0
---	---	---	---

bit address
-------------

Bytes: 2

Cycles: 2

### CJNE <dest-byte>, <src-byte>, rel

**Function:** Compare and jump if not equal

**Description:** CJNE compares the magnitudes of the first two operands, and branches if their values are not equal. The branch destination is computed by adding the signed relative displacement in the last instruction byte to the PC, after incrementing the PC to the start of the next instruction. The carry flag is set if the unsigned integer value of <dest-byte> is less than the unsigned integer value of <src-byte>; otherwise, the carry is cleared. Neither operand is affected.

The first two operands allow four addressing mode combinations: the accumulator may be compared with any directly addressed byte or immediate data, and any indirect RAM location or working register can be compared with an immediate constant.

**Example:** The accumulator contains 34<sub>H</sub>. Register 7 contains 56<sub>H</sub>. The first instruction in the sequence

```

                CJNE    R7, # 60H, NOT_EQ
;
;          ...      ; R7 = 60H
NOT_EQ        JC      REQ_LOW          ; If R7 < 60H
;
;                                     ; R7 > 60H
    
```

sets the carry flag and branches to the instruction at label NOT\_EQ. By testing the carry flag, this instruction determines whether R7 is greater or less than 60<sub>H</sub>.

If the data being presented to port 1 is also 34<sub>H</sub>, then the instruction

```
WAIT:  CJNE  A,P1,WAIT
```

clears the carry flag and continues with the next instruction in sequence, since the accumulator does equal the data read from P1. (If some other value was input on P1, the program will loop at this point until the P1 data changes to 34<sub>H</sub>).

### CJNE A,direct,rel

Operation:  $(PC) \leftarrow (PC) + 3$   
 if  $(A) < > (\text{direct})$   
 then  $(PC) \leftarrow (PC) + \text{relative offset}$   
 if  $(A) < (\text{direct})$   
 then  $(C) \leftarrow 1$   
 else  $(C) \leftarrow 0$

Encoding: 

1	0	1	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

rel. address
--------------

Bytes: 3

Cycles: 2

### CJNE A, #data,rel

Operation:  $(PC) \leftarrow (PC) + 3$   
 if  $(A) < > \text{data}$   
 then  $(PC) \leftarrow (PC) + \text{relative offset}$   
 if  $(A) \leftarrow \text{data}$   
 then  $(C) \leftarrow 1$   
 else  $(C) \leftarrow 0$

Encoding: 

1	0	1	1
---	---	---	---

0	1	0	0
---	---	---	---

immediate data
----------------

rel. address
--------------

Bytes: 3

Cycles: 2

### CJNE Rn, #data, rel

Operation:  $(PC) \leftarrow (PC) + 3$   
 if  $(Rn) < > \text{data}$   
 then  $(PC) \leftarrow (PC) + \text{relative offset}$   
 if  $(Rn) < \text{data}$   
 then  $(C) \leftarrow 1$   
 else  $(C) \leftarrow 0$

Encoding: 

1	0	1	1
---	---	---	---

1	r	r	r
---	---	---	---

immediate data
----------------

rel. address
--------------

Bytes: 3

Cycles: 2

### **CJNE     @Ri, #data, rel**

Operation:      $(PC) \leftarrow (PC) + 3$   
                   if  $((Ri)) < > data$   
                   then  $(PC) \leftarrow (PC) + \text{relative offset}$   
                   if  $((Ri)) < data$   
                   then  $(C) \leftarrow 1$   
                   else  $(C) \leftarrow 0$

Encoding:     1 0 1 1    0 1 1 i                    immediate data                    rel. address

Bytes:            3

Cycles:           2



**CLR      A**

Function:      Clear accumulator

Description:    The accumulator is cleared (all bits set to zero). No flags are affected.

Example:        The accumulator contains 5C<sub>H</sub> (01011100<sub>B</sub>). The instruction

CLR      A

will leave the accumulator set to 00<sub>H</sub> (00000000<sub>B</sub>).

Operation:      CLR  
(A) ← 0

Encoding:      

1	1	1	0	0	1	0	0
---	---	---	---	---	---	---	---

Bytes:          1

Cycles:         1

### CLR bit

Function: Clear bit

Description: The indicated bit is cleared (reset to zero). No other flags are affected. CLR can operate on the carry flag or any directly addressable bit.

Example: Port 1 has previously been written with 5D<sub>H</sub> (01011101<sub>B</sub>). The instruction  
CLR P1.2  
will leave the port set to 59<sub>H</sub> (01011001<sub>B</sub>).

### CLR C

Operation: CLR  
(C) ← 0

Encoding: 1 1 0 0 0 0 1 1

Bytes: 1

Cycles: 1

### CLR bit

Operation: CLR  
(bit) ← 0

Encoding: 1 1 0 0 0 0 1 0 bit address

Bytes: 2

Cycles: 1





**CPL      A**

Function: Complement accumulator

Description: Each bit of the accumulator is logically complemented (one's complement). Bits which previously contained a one are changed to zero and vice versa. No flags are affected.

Example: The accumulator contains 5C<sub>H</sub> (01011100<sub>B</sub>). The instruction

CPL      A

will leave the accumulator set to 0A3<sub>H</sub> (10100011<sub>B</sub>).

Operation: CPL  
(A) ←  $\neg$  (A)

Encoding: 

1	1	1	1	0	1	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1

### CPL bit

Function: Complement bit

Description: The bit variable specified is complemented. A bit which had been a one is changed to zero and vice versa. No other flags are affected. CPL can operate on the carry or any directly addressable bit.

#### Note:

When this instruction is used to modify an output pin, the value used as the original data will be read from the output data latch, not the input pin.

Example: Port 1 has previously been written with 5D<sub>H</sub> (01011101<sub>B</sub>). The instruction sequence

```
CPL P1.1
CPL P1.2
```

will leave the port set to 5B<sub>H</sub> (01011011<sub>B</sub>).

### CPL C

Operation: CPL  
(bit) ← / (C)

Encoding: 

1	0	1	1	0	0	1	1
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1

### CPL bit

Operation: CPL  
(C) ← (bit)

Encoding: 

1	0	1	1	0	0	1	0
---	---	---	---	---	---	---	---

bit address
-------------

Bytes: 2

Cycles: 1

**DA      A**

**Function:** Decimal adjust accumulator for addition

**Description:** DA A adjusts the eight-bit value in the accumulator resulting from the earlier addition of two variables (each in packed BCD format), producing two four-bit digits. Any ADD or ADDC instruction may have been used to perform the addition.

If accumulator bits 3-0 are greater than nine (xxxx1010-xxxx1111), or if the AC flag is one, six is added to the accumulator producing the proper BCD digit in the low-order nibble. This internal addition would set the carry flag if a carry-out of the low-order four-bit field propagated through all high-order bits, but it would not clear the carry flag otherwise.

If the carry flag is now set, or if the four high-order bits now exceed nine (1010xxxx-1111xxxx), these high-order bits are incremented by six, producing the proper BCD digit in the high-order nibble. Again, this would set the carry flag if there was a carry-out of the high-order bits, but wouldn't clear the carry. The carry flag thus indicates if the sum of the original two BCD variables is greater than 100, allowing multiple precision decimal addition. OV is not affected.

All of this occurs during the one instruction cycle. Essentially; this instruction performs the decimal conversion by adding 00<sub>H</sub>, 06<sub>H</sub>, 60<sub>H</sub>, or 66<sub>H</sub> to the accumulator, depending on initial accumulator and PSW conditions.

**Note:**

DA A *cannot* simply convert a hexadecimal number in the accumulator to BCD notation, nor does DA A apply to decimal subtraction.

**Example:** The accumulator holds the value 56<sub>H</sub> (01010110<sub>B</sub>) representing the packed BCD digits of the decimal number 56. Register 3 contains the value 67<sub>H</sub> (01100111<sub>B</sub>) representing the packed BCD digits of the decimal number 67. The carry flag is set. The instruction sequence

```
ADDC  A,R3
DA     A
```

will first perform a standard two's-complement binary addition, resulting in the value 0BE<sub>H</sub> (10111110<sub>B</sub>) in the accumulator. The carry and auxiliary carry flags will be cleared.

The decimal adjust instruction will then alter the accumulator to the value 24<sub>H</sub> (00100100<sub>B</sub>), indicating the packed BCD digits of the decimal number 24, the low-order two digits of the decimal sum of 56, 67, and the carry-in. The carry flag will be set by the decimal adjust instruction, indicating that a decimal overflow occurred. The true sum 56, 67, and 1 is 124.

BCD variables can be incremented or decremented by adding 01<sub>H</sub> or 99<sub>H</sub>. If the accumulator initially holds 30<sub>H</sub> (representing the digits of 30 decimal), then the instruction sequence

```
ADD    A, #99H
DA      A
```

will leave the carry set and 29<sub>H</sub> in the accumulator, since  $30 + 99 = 129$ . The low-order byte of the sum can be interpreted to mean  $30 - 1 = 29$ .

Operation: DA  
 contents of accumulator are BCD  
 if  $[(A3-0) > 9] \vee [(AC) = 1]$   
 then  $(A3-0) \leftarrow (A3-0) + 6$   
 and  
 if  $[(A7-4) > 9] \vee [(C) = 1]$   
 then  $(A7-4) \leftarrow (A7-4) + 6$

Encoding: 

1	1	0	1
---	---	---	---

0	1	0	0
---	---	---	---

Bytes: 1

Cycles: 1

### DEC byte

Function: Decrement

Description: The variable indicated is decremented by 1. An original value of 00<sub>H</sub> will underflow to 0FF<sub>H</sub>. No flags are affected. Four operand addressing modes are allowed: accumulator, register, direct, or register-indirect.

#### Note:

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, *not* the input pins.

Example: Register 0 contains 7F<sub>H</sub> (01111111<sub>B</sub>). Internal RAM locations 7E<sub>H</sub> and 7F<sub>H</sub> contain 00<sub>H</sub> and 40<sub>H</sub>, respectively. The instruction sequence

```
DEC    @R0
DEC    R0
DEC    @R0
```

will leave register 0 set to 7E<sub>H</sub> and internal RAM locations 7E<sub>H</sub> and 7F<sub>H</sub> set to 0FF<sub>H</sub> and 3F<sub>H</sub>.

### DEC A

Operation: DEC  
(A) ← (A) – 1

Encoding: 

0	0	0	1	0	1	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1

### DEC Rn

Operation: DEC  
(Rn) ← (Rn) – 1

Encoding: 

0	0	0	1	1	r	r	r
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1

### DEC      direct

Operation:    DEC  
                   $(\text{direct}) \leftarrow (\text{direct}) - 1$

Encoding:    

0	0	0	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes:        2

Cycles:      1

### DEC      @Ri

Operation:    DEC  
                   $((\text{Ri})) \leftarrow ((\text{Ri})) - 1$

Encoding:    

0	0	0	1
---	---	---	---

0	1	1	i
---	---	---	---

Bytes:        1

Cycles:      1

### DIV AB

Function: Divide

Description: DIV AB divides the unsigned eight-bit integer in the accumulator by the unsigned eight-bit integer in register B. The accumulator receives the integer part of the quotient; register B receives the integer remainder. The carry and OV flags will be cleared.

*Exception:* If B had originally contained 00<sub>H</sub>, the values returned in the accumulator and B register will be undefined and the overflow flag will be set. The carry flag is cleared in any case.

Example: The accumulator contains 251 (0FB<sub>H</sub> or 11111011<sub>B</sub>) and B contains 18 (12<sub>H</sub> or 00010010<sub>B</sub>). The instruction

DIV AB

will leave 13 in the accumulator (0D<sub>H</sub> or 00001101<sub>B</sub>) and the value 17 (11<sub>H</sub> or 00010001<sub>B</sub>) in B, since  $251 = (13 \times 18) + 17$ . Carry and OV will both be cleared.

Operation: DIV

(A15-8) ← (A) / (B)  
(B7-0)

Encoding: 

1	0	0	0	0	1	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 4

### DJNZ <byte>, <rel-addr>

Function: Decrement and jump if not zero

Description: DJNZ decrements the location indicated by 1, and branches to the address indicated by the second operand if the resulting value is not zero. An original value of 00<sub>H</sub> will underflow to 0FF<sub>H</sub>. No flags are affected. The branch destination would be computed by adding the signed relative-displacement value in the last instruction byte to the PC, after incrementing the PC to the first byte of the following instruction. The location decremented may be a register or directly addressed byte.

#### Note:

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, not the input pins.

Example: Internal RAM locations 40<sub>H</sub>, 50<sub>H</sub>, and 60<sub>H</sub> contain the values, 01<sub>H</sub>, 70<sub>H</sub>, and 15<sub>H</sub>, respectively. The instruction sequence

```
DJNZ 40H,LABEL_1
DJNZ 50H,LABEL_2
DJNZ 60H,LABEL_3
```

will cause a jump to the instruction at label LABEL\_2 with the values 00<sub>H</sub>, 6F<sub>H</sub>, and 15<sub>H</sub> in the three RAM locations. The first jump was *not* taken because the result was zero.

This instruction provides a simple way of executing a program loop a given number of times, or for adding a moderate time delay (from 2 to 512 machine cycles) with a single instruction. The instruction sequence

```
MOV      R2, #8
TOGGLE: CPL      P1.7
        DJNZ     R2,TOGGLE
```

will toggle P1.7 eight times, causing four output pulses to appear at bit 7 of output port 1. Each pulse will last three machine cycles; two for DJNZ and one to alter the pin.



### DJNZ Rn,rel

Operation: DJNZ  
 $(PC) \leftarrow (PC) + 2$   
 $(Rn) \leftarrow (Rn) - 1$   
 if  $(Rn) > 0$  or  $(Rn) < 0$   
 then  $(PC) \leftarrow (PC) + rel$

Encoding: 

1	1	0	1
---	---	---	---

1	r	r	r
---	---	---	---

rel. address
--------------

Bytes: 2

Cycles: 2

### DJNZ direct,rel

Operation: DJNZ  
 $(PC) \leftarrow (PC) + 2$   
 $(direct) \leftarrow (direct) - 1$   
 if  $(direct) > 0$  or  $(direct) < 0$   
 then  $(PC) \leftarrow (PC) + rel$

Encoding: 

1	1	0	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

rel. address
--------------

Bytes: 3

Cycles: 2

### INC <byte>

Function: Increment

Description: INC increments the indicated variable by 1. An original value of  $0FF_H$  will overflow to  $00_H$ . No flags are affected. Three addressing modes are allowed: register, direct, or register-indirect.

#### Note:

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, *not* the input pins.

Example: Register 0 contains  $7E_H$  ( $01111110_B$ ). Internal RAM locations  $7E_H$  and  $7F_H$  contain  $0FF_H$  and  $40_H$ , respectively. The instruction sequence

```
INC    @R0
```

```
INC    R0
```

```
INC    @R0
```

will leave register 0 set to  $7F_H$  and internal RAM locations  $7E_H$  and  $7F_H$  holding (respectively)  $00_H$  and  $41_H$ .

### INC A

Operation: INC  
 $(A) \leftarrow (A) + 1$

Encoding:  $\left[ \begin{array}{cccc} 0 & 0 & 0 & 0 \end{array} \right] \left[ \begin{array}{cccc} 0 & 1 & 0 & 0 \end{array} \right]$

Bytes: 1

Cycles: 1

### INC Rn

Operation: INC  
 $(Rn) \leftarrow (Rn) + 1$

Encoding:  $\left[ \begin{array}{cccc} 0 & 0 & 0 & 0 \end{array} \right] \left[ \begin{array}{cccc} 1 & r & r & r \end{array} \right]$

Bytes: 1

Cycles: 1

### INC      direct

Operation:      INC  
                      $(\text{direct}) \leftarrow (\text{direct}) + 1$

Encoding:      

0	0	0	0
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes:          2

Cycles:        1

### INC      @Ri

Operation:      INC  
                      $((\text{Ri})) \leftarrow ((\text{Ri})) + 1$

Encoding:      

0	0	0	0
---	---	---	---

0	1	1	i
---	---	---	---

Bytes:          1

Cycles:        1

## INC      DPTR

Function:      Increment data pointer

Description:    Increment the 16-bit data pointer by 1. A 16-bit increment (modulo  $2^{16}$ ) is performed; an overflow of the low-order byte of the data pointer (DPL) from  $0FF_H$  to  $00_H$  will increment the high-order byte (DPH). No flags are affected.

This is the only 16-bit register which can be incremented.

Example:        Registers DPH and DPL contain  $12_H$  and  $0FE_H$ , respectively. The instruction sequence

INC      DPTR

INC      DPTR

INC      DPTR

will change DPH and DPL to  $13_H$  and  $01_H$ .

Operation:     INC  
(DPTR)  $\leftarrow$  (DPTR) + 1

Encoding:      

1	0	1	0	0	0	1	1
---	---	---	---	---	---	---	---

Bytes:          1

Cycles:        2

### JB bit,rel

**Function:** Jump if bit is set

**Description:** If the indicated bit is a one, jump to the address indicated; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the third instruction byte to the PC, after incrementing the PC to the first byte of the next instruction. The bit tested is not modified. No flags are affected.

**Example:** The data present at input port 1 is 11001010<sub>B</sub>. The accumulator holds 56 (01010110<sub>B</sub>). The instruction sequence

```
JB      P1.2,LABEL1
JB      ACC.2,LABEL2
```

will cause program execution to branch to the instruction at label LABEL2.

**Operation:** JB  
 $(PC) \leftarrow (PC) + 3$   
 if (bit) = 1  
 then  $(PC) \leftarrow (PC) + rel$

**Encoding:**

0	0	1	0	0	0	0	0
---	---	---	---	---	---	---	---

bit address
-------------

rel. address
--------------

**Bytes:** 3

**Cycles:** 2

### JBC bit,rel

**Function:** Jump if bit is set and clear bit

**Description:** If the indicated bit is one, branch to the address indicated; otherwise proceed with the next instruction. *In either case, clear the designated bit.* The branch destination is computed by adding the signed relative displacement in the third instruction byte to the PC, after incrementing the PC to the first byte of the next instruction. No flags are affected.

#### Note:

When this instruction is used to test an output pin, the value used as the original data will be read from the output data latch, not the input pin.

**Example:** The accumulator holds 56<sub>H</sub> (01010110<sub>B</sub>). The instruction sequence

```
JBC    ACC.3,LABEL1
```

```
JBC    ACC.2,LABEL2
```

will cause program execution to continue at the instruction identified by the label LABEL2, with the accumulator modified to 52<sub>H</sub> (01010010<sub>B</sub>).

**Operation:** JBC  
 $(PC) \leftarrow (PC) + 3$   
 if (bit) = 1  
 then (bit)  $\leftarrow$  0  
 $(PC) \leftarrow (PC) + rel$

**Encoding:**

0	0	0	1	0	0	0	0
---	---	---	---	---	---	---	---

 | 

bit address
-------------

 | 

rel. address
--------------

**Bytes:** 3

**Cycles:** 2



### JC      rel

**Function:** Jump if carry is set

**Description:** If the carry flag is set, branch to the address indicated; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the second instruction byte to the PC, after incrementing the PC twice. No flags are affected.

**Example:** The carry flag is cleared. The instruction sequence

```
JC      LABEL1
CPL     C
JC      LABEL2
```

will set the carry and cause program execution to continue at the instruction identified by the label LABEL2.

**Operation:** JC  
 $(PC) \leftarrow (PC) + 2$   
 if  $(C) = 1$   
 then  $(PC) \leftarrow (PC) + rel$

**Encoding:**

0	1	0	0	0	0	0	0
---	---	---	---	---	---	---	---

rel. address
--------------

**Bytes:** 2

**Cycles:** 2

### **JMP      @A + DPTR**

**Function:**      Jump indirect

**Description:**    Add the eight-bit unsigned contents of the accumulator with the sixteen-bit data pointer, and load the resulting sum to the program counter. This will be the address for subsequent instruction fetches. Sixteen-bit addition is performed (modulo  $2^{16}$ ): a carry-out from the low-order eight bits propagates through the higher-order bits. Neither the accumulator nor the data pointer is altered. No flags are affected.

**Example:**        An even number from 0 to 6 is in the accumulator. The following sequence of instructions will branch to one of four AJMP instructions in a jump table starting at JMP\_TBL:

```

                MOV     DPTR, #JMP_TBL
                JMP     @A + DPTR
JMP_TBL:  AJMP    LABEL0
                AJMP    LABEL1
                AJMP    LABEL2
                AJMP    LABEL3
    
```

If the accumulator equals  $04_{\text{H}}$  when starting this sequence, execution will jump to label LABEL2. Remember that AJMP is a two-byte instruction, so the jump instructions start at every other address.

**Operation:**      JMP  
                     (PC)  $\leftarrow$  (A) + (DPTR)

**Encoding:**

0	1	1	1
---	---	---	---

0	0	1	1
---	---	---	---

**Bytes:**            1

**Cycles:**           2





### JNB bit,rel

**Function:** Jump if bit is not set

**Description:** If the indicated bit is a zero, branch to the indicated address; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the third instruction byte to the PC, after incrementing the PC to the first byte of the next instruction. *The bit tested is not modified.* No flags are affected.

**Example:** The data present at input port 1 is 11001010<sub>B</sub>. The accumulator holds 56<sub>H</sub> (01010110<sub>B</sub>). The instruction sequence

```
JNB    P1.3,LABEL1
JNB    ACC.3,LABEL2
```

will cause program execution to continue at the instruction at label LABEL2.

**Operation:** JNB  
 $(PC) \leftarrow (PC) + 3$   
 if (bit) = 0  
 then  $(PC) \leftarrow (PC) + rel$ .

**Encoding:**

0	0	1	1	0	0	0	0
---	---	---	---	---	---	---	---

bit address
-------------

rel. address
--------------

**Bytes:** 3

**Cycles:** 2

### JNC rel

Function: Jump if carry is not set

Description: If the carry flag is a zero, branch to the address indicated; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the second instruction byte to the PC, after incrementing the PC twice to point to the next instruction. The carry flag is not modified.

Example: The carry flag is set. The instruction sequence

```
JNC LABEL1
CPL C
JNC LABEL2
```

will clear the carry and cause program execution to continue at the instruction identified by the label LABEL2.

Operation: JNC  
 $(PC) \leftarrow (PC) + 2$   
 if  $(C) = 0$   
 then  $(PC) \leftarrow (PC) + rel$

Encoding: 

0	1	0	1	0	0	0	0
---	---	---	---	---	---	---	---

 rel. address

Bytes: 2

Cycles: 2

### JNZ rel

**Function:** Jump if accumulator is not zero

**Description:** If any bit of the accumulator is a one, branch to the indicated address; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the second instruction byte to the PC, after incrementing the PC twice. The accumulator is not modified. No flags are affected.

**Example:** The accumulator originally holds 00<sub>H</sub>. The instruction sequence

```
JNZ LABEL1
INC A
JNZ LABEL2
```

will set the accumulator to 01<sub>H</sub> and continue at label LABEL2.

**Operation:** JNZ  
 $(PC) \leftarrow (PC) + 2$   
 if  $(A) \neq 0$   
 then  $(PC) \leftarrow (PC) + \text{rel.}$

**Encoding:**

0	1	1	1	0	0	0	0
---	---	---	---	---	---	---	---

rel. address
--------------

**Bytes:** 2

**Cycles:** 2

### JZ rel

**Function:** Jump if accumulator is zero

**Description:** If all bits of the accumulator are zero, branch to the address indicated; otherwise proceed with the next instruction. The branch destination is computed by adding the signed relative-displacement in the second instruction byte to the PC, after incrementing the PC twice. The accumulator is not modified. No flags are affected.

**Example:** The accumulator originally contains 01<sub>H</sub>. The instruction sequence

```
JZ    LABEL1
DEC   A
JZ    LABEL2
```

will change the accumulator to 00<sub>H</sub> and cause program execution to continue at the instruction identified by the label LABEL2.

**Operation:** JZ  
 $(PC) \leftarrow (PC) + 2$   
 if (A) = 0  
 then  $(PC) \leftarrow (PC) + rel$

**Encoding:**

0	1	1	0	0	0	0
---	---	---	---	---	---	---

rel. address
--------------

**Bytes:** 2

**Cycles:** 2

### LCALL addr16

Function: Long call

Description: LCALL calls a subroutine located at the indicated address. The instruction adds three to the program counter to generate the address of the next instruction and then pushes the 16-bit result onto the stack (low byte first), incrementing the stack pointer by two. The high-order and low-order bytes of the PC are then loaded, respectively, with the second and third bytes of the LCALL instruction. Program execution continues with the instruction at this address. The subroutine may therefore begin anywhere in the full 64 Kbyte program memory address space. No flags are affected.

Example: Initially the stack pointer equals 07<sub>H</sub>. The label "SUBRTN" is assigned to program memory location 1234<sub>H</sub>. After executing the instruction

LCALL SUBRTN

at location 0123<sub>H</sub>, the stack pointer will contain 09<sub>H</sub>, internal RAM locations 08<sub>H</sub> and 09<sub>H</sub> will contain 26<sub>H</sub> and 01<sub>H</sub>, and the PC will contain 1234<sub>H</sub>.

Operation: LCALL  
 $(PC) \leftarrow (PC) + 3$   
 $(SP) \leftarrow (SP) + 1$   
 $((SP)) \leftarrow (PC7-0)$   
 $(SP) \leftarrow (SP) + 1$   
 $((SP)) \leftarrow (PC15-8)$   
 $(PC) \leftarrow \text{addr15-0}$

Encoding:

0	0	0	1	0	0	1	0
---	---	---	---	---	---	---	---

addr15 . . . addr8
--------------------

addr7 . . . addr0
-------------------

Bytes: 3

Cycles: 2

### **LJMP      addr16**

Function:      Long jump

Description:    LJMP causes an unconditional branch to the indicated address, by loading the high-order and low-order bytes of the PC (respectively) with the second and third instruction bytes. The destination may therefore be anywhere in the full 64K program memory address space. No flags are affected.

Example:        The label "JMPADR" is assigned to the instruction at program memory location 1234<sub>H</sub>. The instruction

**LJMP      JMPADR**

at location 0123<sub>H</sub> will load the program counter with 1234<sub>H</sub>.

Operation:      LJMP  
(PC) ← addr15-0

Encoding:      

0	0	0	0
---	---	---	---

0	0	1	0
---	---	---	---

addr15 . . . addr8															
--------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

addr7 . . . addr0							
-------------------	--	--	--	--	--	--	--

Bytes:          3

Cycles:        2



### MOV <dest-byte>, <src-byte>

Function: Move byte variable

Description: The byte variable indicated by the second operand is copied into the location specified by the first operand. The source byte is not affected. No other register or flag is affected.

This is by far the most flexible operation. Fifteen combinations of source and destination addressing modes are allowed.

Example: Internal RAM location 30<sub>H</sub> holds 40<sub>H</sub>. The value of RAM location 40<sub>H</sub> is 10<sub>H</sub>. The data present at input port 1 is 11001010<sub>B</sub> (0CA<sub>H</sub>).

```
MOV    R0, #30H           ; R0 <= 30H
MOV    A, @R0             ; A <= 40H
MOV    R1,A               ; R1 <= 40H
MOV    B, @R1             ; B <= 10H
MOV    @R1,P1             ; RAM (40H) <= 0CAH
MOV    P2,P1              ; P2 <= 0CAH
```

leaves the value 30<sub>H</sub> in register 0, 40<sub>H</sub> in both the accumulator and register 1, 10<sub>H</sub> in register B, and 0CA<sub>H</sub> (11001010<sub>B</sub>) both in RAM location 40<sub>H</sub> and output on port 2.

### MOV A,Rn

Operation: MOV  
(A) ← (Rn)

Encoding: 

1	1	1	0
---	---	---	---

1	r	r	r
---	---	---	---

Bytes: 1

Cycles: 1

### MOV A,direct \*)

Operation: MOV  
(A) ← (direct)

Encoding: 

1	1	1	0
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 1

\*) MOV A,ACC is not a valid instruction. The content of the accumulator after the execution of this instruction is undefined.

### MOV A,@Ri

Operation: MOV  
(A) ← ((Ri))

Encoding: 

1	1	1	0
---	---	---	---

0	1	1	i
---	---	---	---

Bytes: 1

Cycles: 1

### MOV A,#data

Operation: MOV  
(A) ← #data

Encoding: 

0	1	1	1
---	---	---	---

0	1	0	0
---	---	---	---

immediate data
----------------

Bytes: 2

Cycles: 1

### MOV Rn,A

Operation: MOV  
(Rn) ← (A)

Encoding: 

1	1	1	1
---	---	---	---

1	r	r	r
---	---	---	---

Bytes: 1

Cycles: 1

### MOV Rn,direct

Operation: MOV  
(Rn) ← (direct)

Encoding: 

1	0	1	0
---	---	---	---

1	r	r	r
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 2



### MOV Rn, #data

Operation: MOV  
(Rn) ← #data

Encoding: 

0	1	1	1
---	---	---	---

1	r	r	r
---	---	---	---

immediate data
----------------

Bytes: 2

Cycles: 1

### MOV direct,A

Operation: MOV  
(direct) ← (A)

Encoding: 

1	1	1	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 1

### MOV direct,Rn

Operation: MOV  
(direct) ← (Rn)

Encoding: 

1	0	0	0
---	---	---	---

1	r	r	r
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 2

### MOV direct,direct

Operation: MOV  
(direct) ← (direct)

Encoding: 

1	0	0	0
---	---	---	---

0	1	0	1
---	---	---	---

dir.addr. (src)
-----------------

dir.addr. (dest)
------------------

Bytes: 3

Cycles: 2

### MOV direct, @ Ri

Operation: MOV  
(direct)  $\leftarrow$  ((Ri))

Encoding: 

1	0	0	0
---	---	---	---

0	1	1	i
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 2

### MOV direct, #data

Operation: MOV  
(direct)  $\leftarrow$  #data

Encoding: 

0	1	1	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

immediate data
----------------

Bytes: 3

Cycles: 2

### MOV @ Ri,A

Operation: MOV  
((Ri))  $\leftarrow$  (A)

Encoding: 

1	1	1	1
---	---	---	---

0	1	1	i
---	---	---	---

Bytes: 1

Cycles: 1

### MOV @ Ri,direct

Operation: MOV  
((Ri))  $\leftarrow$  (direct)

Encoding: 

1	0	1	0
---	---	---	---

0	1	1	i
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 2

**MOV        @ Ri,#data**

Operation:    MOV  
               $((Ri)) \leftarrow \#data$

Encoding:     

0	1	1	1
---	---	---	---

0	1	1	i
---	---	---	---

immediate data
----------------

Bytes:        2

Cycles:       1

**MOV      <dest-bit>, <src-bit>**

Function:      Move bit data

Description:    The Boolean variable indicated by the second operand is copied into the location specified by the first operand. One of the operands must be the carry flag; the other may be any directly addressable bit. No other register or flag is affected.

Example:        The carry flag is originally set. The data present at input port 3 is 11000101<sub>B</sub>. The data previously written to output port 1 is 35<sub>H</sub> (00110101<sub>B</sub>).

```
MOV    P1.3,C
MOV    C,P3.3
MOV    P1.2,C
```

will leave the carry cleared and change port 1 to 39<sub>H</sub> (00111001<sub>B</sub>).

**MOV      C,bit**

Operation:      MOV  
                  (C) ← (bit)

Encoding:        

1	0	1	0
---	---	---	---

0	0	1	0
---	---	---	---

bit address
-------------

Bytes:            2

Cycles:           1

**MOV      bit,C**

Operation:      MOV  
                  (bit) ← (C)

Encoding:        

1	0	0	1
---	---	---	---

0	0	1	0
---	---	---	---

bit address
-------------

Bytes:            2

Cycles:           2

### MOV DPTR, #data16

**Function:** Load data pointer with a 16-bit constant

**Description:** The data pointer is loaded with the 16-bit constant indicated. The 16 bit constant is loaded into the second and third bytes of the instruction. The second byte (DPH) is the high-order byte, while the third byte (DPL) holds the low-order byte. No flags are affected.

This is the only instruction which moves 16 bits of data at once.

**Example:** The instruction

MOV DPTR, #1234H

will load the value 1234<sub>H</sub> into the data pointer: DPH will hold 12<sub>H</sub> and DPL will hold 34<sub>H</sub>.

**Operation:** MOV  
(DPTR) ← #data15-0  
DPH □ DPL ← #data15-8 □ #data7-0

**Encoding:**

1	0	0	1
---	---	---	---

0	0	0	0
---	---	---	---

immed. data 15 . . . 8			
------------------------	--	--	--

immed. data 7 . . . 0			
-----------------------	--	--	--

**Bytes:** 3

**Cycles:** 2

### MOVC A, @A + <base-reg>

Function: Move code byte

Description: The MOVC instructions load the accumulator with a code byte, or constant from program memory. The address of the byte fetched is the sum of the original unsigned eight-bit accumulator contents and the contents of a sixteen-bit base register, which may be either the data pointer or the PC. In the latter case, the PC is incremented to the address of the following instruction before being added to the accumulator; otherwise the base register is not altered. Sixteen-bit addition is performed so a carry-out from the low-order eight bits may propagate through higher-order bits. No flags are affected.

Example: A value between 0 and 3 is in the accumulator. The following instructions will translate the value in the accumulator to one of four values defined by the DB (define byte) directive.

```
REL_PC: INC      A
          MOVC    A, @A + PC
          RET
          DB      66H
          DB      77H
          DB      88H
          DB      99H
```

If the subroutine is called with the accumulator equal to 01<sub>H</sub>, it will return with 77<sub>H</sub> in the accumulator. The INC A before the MOVC instruction is needed to "get around" the RET instruction above the table. If several bytes of code separated the MOVC from the table, the corresponding number would be added to the accumulator instead.

### MOVC A, @A + DPTR

Operation: MOVC  
(A) ← ((A) + (DPTR))

Encoding: 

1	0	0	1
---	---	---	---

0	0	1	1
---	---	---	---

Bytes: 1

Cycles: 2

### **MOVC    A, @A + PC**

Operation:    MOVC  
                   $(PC) \leftarrow (PC) + 1$   
                   $(A) \leftarrow ((A) + (PC))$

Encoding:     

1	0	0	0	0	0	1	1
---	---	---	---	---	---	---	---

Bytes:        1

Cycles:       2

### **MOVX     <dest-byte>, <src-byte>**

**Function:**         Move external

**Description:**    The MOVX instructions transfer data between the accumulator and a byte of external data memory, hence the "X" appended to MOV. There are two types of instructions, differing in whether they provide an eight bit or sixteen-bit indirect address to the external data RAM.

In the first type, the contents of R0 or R1 in the current register bank provide an eight-bit address multiplexed with data on P0. Eight bits are sufficient for external I/O expansion decoding or a relatively small RAM array. For somewhat larger arrays, any output port pins can be used to output higher-order address bits. These pins would be controlled by an output instruction preceding the MOVX.

In the second type of MOVX instructions, the data pointer generates a sixteen-bit address. P2 outputs the high-order eight address bits (the contents of DPH) while P0 multiplexes the low-order eight bits (DPL) with data. The P2 special function register retains its previous contents while the P2 output buffers are emitting the contents of DPH. This form is faster and more efficient when accessing very large data arrays (up to 64 Kbyte), since no additional instructions are needed to set up the output ports.

It is possible in some situations to mix the two MOVX types. A large RAM array with its high-order address lines driven by P2 can be addressed via the data pointer, or with code to output high-order address bits to P2 followed by a MOVX instruction using R0 or R1.

**Example:**         An external 256-byte RAM using multiplexed address/data lines is connected to the C500 port 0. Port 3 provides control lines for the external RAM. Ports 1 and 2 are used for normal I/O. Registers 0 and 1 contain 12<sub>H</sub> and 34<sub>H</sub>. Location 34<sub>H</sub> of the external RAM holds the value 56<sub>H</sub>. The instruction sequence

```
MOVX    A, @R1
MOVX    @R0,A
```

copies the value 56<sub>H</sub> into both the accumulator and external RAM location 12<sub>H</sub>.



### MOVX A,@Ri

Operation: MOVX  
(A) ← ((Ri))

Encoding: 

1	1	1	0	0	0	1	i
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 2

### MOVX A,@DPTR

Operation: MOVX  
(A) ← ((DPTR))

Encoding: 

1	1	1	0	0	0	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 2

### MOVX @Ri,A

Operation: MOVX  
((Ri)) ← (A)

Encoding: 

1	1	1	1	0	0	1	i
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 2

### MOVX @DPTR,A

Operation: MOVX  
((DPTR)) ← (A)

Encoding: 

1	1	1	1	0	0	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 2

### MUL AB

Function: Multiply

Description: MUL AB multiplies the unsigned eight-bit integers in the accumulator and register B. The low-order byte of the sixteen-bit product is left in the accumulator, and the high-order byte in B. If the product is greater than 255 (0FF<sub>H</sub>) the overflow flag is set; otherwise it is cleared. The carry flag is always cleared.

Example: Originally the accumulator holds the value 80 (50<sub>H</sub>). Register B holds the value 160 (0A0<sub>H</sub>). The instruction

MUL AB

will give the product 12,800 (3200<sub>H</sub>), so B is changed to 32<sub>H</sub> (00110010<sub>B</sub>) and the accumulator is cleared. The overflow flag is set, carry is cleared.

Operation: MUL

(A7-0)  
(B15-8) ← (A) × (B)

Encoding: 

1	0	1	0	0	1	0	0
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 4



### NOP

**Function:** No operation

**Description:** Execution continues at the following instruction. Other than the PC, no registers or flags are affected.

**Example:** It is desired to produce a low-going output pulse on bit 7 of port 2 lasting exactly 5 cycles. A simple SETB/CLR sequence would generate a one-cycle pulse, so four additional cycles must be inserted. This may be done (assuming no interrupts are enabled) with the instruction sequence

```
CLR P2.7
NOP
NOP
NOP
NOP
SETB P2.7
```

**Operation:** NOP

**Encoding:**

0 0 0 0	0 0 0 0
---------	---------

**Bytes:** 1

**Cycles:** 1

### ORL <dest-byte>, <src-byte>

**Function:** Logical OR for byte variables

**Description:** ORL performs the bitwise logical OR operation between the indicated variables, storing the results in the destination byte. No flags are affected.

The two operands allow six addressing mode combinations. When the destination is the accumulator, the source can use register, direct, register-indirect, or immediate addressing; when the destination is a direct address, the source can be the accumulator or immediate data.

#### Note:

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, *not* the input pins.

**Example:** If the accumulator holds 0C3<sub>H</sub> (11000011<sub>B</sub>) and R0 holds 55<sub>H</sub> (01010101<sub>B</sub>) then the instruction

```
ORL    A,R0
```

will leave the accumulator holding the value 0D7<sub>H</sub> (11010111<sub>B</sub>).

When the destination is a directly addressed byte, the instruction can set combinations of bits in any RAM location or hardware register. The pattern of bits to be set is determined by a mask byte, which may be either a constant data value in the instruction or a variable computed in the accumulator at run-time. The instruction

```
ORL    P1,#00110010B
```

will set bits 5, 4, and 1 of output port 1.

### ORL A,Rn

**Operation:** ORL  
 $(A) \leftarrow (A) \vee (Rn)$

**Encoding:**

0	1	0	0
---	---	---	---

1	r	r	r
---	---	---	---

**Bytes:** 1

**Cycles:** 1

### ORL A,direct

Operation: ORL  
 $(A) \leftarrow (A) \vee (\text{direct})$

Encoding: 

0	1	0	0
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 1

### ORL A,@Ri

Operation: ORL  
 $(A) \leftarrow (A) \vee ((Ri))$

Encoding: 

0	1	0	0
---	---	---	---

0	1	1	i
---	---	---	---

Bytes: 1

Cycles: 1

### ORL A,#data

Operation: ORL  
 $(A) \leftarrow (A) \vee \#data$

Encoding: 

0	1	0	0
---	---	---	---

0	1	0	0
---	---	---	---

immediate data
----------------

Bytes: 2

Cycles: 1

### ORL direct,A

Operation: ORL  
 $(\text{direct}) \leftarrow (\text{direct}) \vee (A)$

Encoding: 

0	1	0	0
---	---	---	---

0	0	1	0
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 1

**ORL      direct, #data**

Operation:    ORL  
                 (direct) ← (direct) ∨ #data

Encoding:    

0	1	0	0
---	---	---	---

0	0	1	1
---	---	---	---

direct address
----------------

immediate data
----------------

Bytes:        3

Cycles:       2

### ORL C, <src-bit>

Function: Logical OR for bit variables

Description: Set the carry flag if the Boolean value is a logic 1; leave the carry in its current state otherwise. A slash ("/") preceding the operand in the assembly language indicates that the logical complement of the addressed bit is used as the source value, but the source bit itself is not affected. No other flags are affected.

Example: Set the carry flag if, and only if, P1.0 = 1, ACC.7 = 1, or OV = 0:

```
MOV    C,P1.0           ; Load carry with input pin P1.0
ORL    C,ACC.7          ; OR carry with the accumulator bit 7
ORL    C,/OV            ; OR carry with the inverse of OV
```

### ORL C,bit

Operation: ORL  
 $(C) \leftarrow (C) \vee (\text{bit})$

Encoding: 

0	1	1	1
---	---	---	---

0	0	1	0
---	---	---	---

bit address

Bytes: 2

Cycles: 2

### ORL C,/bit

Operation: ORL  
 $(C) \leftarrow (C) \vee /(\text{bit})$

Encoding: 

1	0	1	0
---	---	---	---

0	0	0	0
---	---	---	---

bit address

Bytes: 2

Cycles: 2

### POP      direct

Function:      Pop from stack

Description:      The contents of the internal RAM location addressed by the stack pointer is read, and the stack pointer is decremented by one. The value read is the transfer to the directly addressed byte indicated. No flags are affected.

Example:      The stack pointer originally contains the value 32<sub>H</sub>, and internal RAM locations 30<sub>H</sub> through 32<sub>H</sub> contain the values 20<sub>H</sub>, 23<sub>H</sub>, and 01<sub>H</sub>, respectively. The instruction sequence

```
POP      DPH
POP      DPL
```

will leave the stack pointer equal to the value 30<sub>H</sub> and the data pointer set to 0123<sub>H</sub>. At this point the instruction

```
POP      SP
```

will leave the stack pointer set to 20<sub>H</sub>. Note that in this special case the stack pointer was decremented to 2F<sub>H</sub> before being loaded with the value popped (20<sub>H</sub>).

Operation:      POP  
                   (direct) ← ((SP))  
                   (SP) ← (SP) – 1

Encoding:

1	1	0	1	0	0	0	0
---	---	---	---	---	---	---	---

direct address
----------------

Bytes:      2

Cycles:      2





### **PUSH      direct**

**Function:**      Push onto stack

**Description:**    The stack pointer is incremented by one. The contents of the indicated variable is then copied into the internal RAM location addressed by the stack pointer. Otherwise no flags are affected.

**Example:**        On entering an interrupt routine the stack pointer contains 09<sub>H</sub>. The data pointer holds the value 0123<sub>H</sub>. The instruction sequence

```
PUSH   DPL
PUSH   DPH
```

will leave the stack pointer set to 0B<sub>H</sub> and store 23<sub>H</sub> and 01<sub>H</sub> in internal RAM locations 0A<sub>H</sub> and 0B<sub>H</sub>, respectively.

**Operation:**      PUSH  
                       (SP) ← (SP) + 1  
                       ((SP)) ← (direct)

**Encoding:**

1	1	0	0	0	0	0	0
---	---	---	---	---	---	---	---

direct address
----------------

**Bytes:**            2

**Cycles:**          2

### RET

**Function:** Return from subroutine

**Description:** RET pops the high and low-order bytes of the PC successively from the stack, decrementing the stack pointer by two. Program execution continues at the resulting address, generally the instruction immediately following an ACALL or LCALL. No flags are affected.

**Example:** The stack pointer originally contains the value 0B<sub>H</sub>. Internal RAM locations 0A<sub>H</sub> and 0B<sub>H</sub> contain the values 23<sub>H</sub> and 01<sub>H</sub>, respectively. The instruction  
RET  
will leave the stack pointer equal to the value 09<sub>H</sub>. Program execution will continue at location 0123<sub>H</sub>.

**Operation:** RET  
 $(PC_{15-8}) \leftarrow ((SP))$   
 $(SP) \leftarrow (SP) - 1$   
 $(PC_{7-0}) \leftarrow ((SP))$   
 $(SP) \leftarrow (SP) - 1$

**Encoding:**

0	0	1	0	0	0	1	0
---	---	---	---	---	---	---	---

**Bytes:** 1

**Cycles:** 2



### RETI

**Function:** Return from interrupt

**Description:** RETI pops the high and low-order bytes of the PC successively from the stack, and restores the interrupt logic to accept additional interrupts at the same priority level as the one just processed. The stack pointer is left decremented by two. No other registers are affected; the PSW is *not* automatically restored to its pre-interrupt status. Program execution continues at the resulting address, which is generally the instruction immediately after the point at which the interrupt request was detected. If a lower or same-level interrupt is pending when the RETI instruction is executed, that one instruction will be executed before the pending interrupt is processed.

**Example:** The stack pointer originally contains the value 0B<sub>H</sub>. An interrupt was detected during the instruction ending at location 0122<sub>H</sub>. Internal RAM locations 0A<sub>H</sub> and 0B<sub>H</sub> contain the values 23<sub>H</sub> and 01<sub>H</sub>, respectively. The instruction  
RETI  
will leave the stack pointer equal to 09<sub>H</sub> and return program execution to location 0123<sub>H</sub>.

**Operation:** RETI  
 $(PC15-8) \leftarrow ((SP))$   
 $(SP) \leftarrow (SP) - 1$   
 $(PC7-0) \leftarrow ((SP))$   
 $(SP) \leftarrow (SP) - 1$

**Encoding:**

0	0	1	1
---	---	---	---

0	0	1	0
---	---	---	---

**Bytes:** 1

**Cycles:** 2

### RL      A

Function: Rotate accumulator left

Description: The eight bits in the accumulator are rotated one bit to the left. Bit 7 is rotated into the bit 0 position. No flags are affected.

Example: The accumulator holds the value 0C5<sub>H</sub> (11000101<sub>B</sub>). The instruction

RL      A

leaves the accumulator holding the value 8B<sub>H</sub> (10001011<sub>B</sub>) with the carry unaffected.

Operation: RL  
 $(A_{n+1}) \leftarrow (A_n) \quad n = 0-6$   
 $(A_0) \leftarrow (A_7)$

Encoding: 

0	0	1	0	0	0	1	1
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1



### RLC      A

**Function:** Rotate accumulator left through carry flag

**Description:** The eight bits in the accumulator and the carry flag are together rotated one bit to the left. Bit 7 moves into the carry flag; the original state of the carry flag moves into the bit 0 position. No other flags are affected.

**Example:** The accumulator holds the value 0C5<sub>H</sub> (11000101<sub>B</sub>), and the carry is zero. The instruction

RLC      A

leaves the accumulator holding the value 8A<sub>H</sub> (10001010<sub>B</sub>) with the carry set.

**Operation:** RLC  
 $(A_{n+1}) \leftarrow (A_n) \quad n = 0-6$   
 $(A_0) \leftarrow (C)$   
 $(C) \leftarrow (A_7)$

**Encoding:**

0	0	1	1
---	---	---	---

0	0	1	1
---	---	---	---

**Bytes:** 1

**Cycles:** 1

### RR      A

Function: Rotate accumulator right

Description: The eight bits in the accumulator are rotated one bit to the right. Bit 0 is rotated into the bit 7 position. No flags are affected.

Example: The accumulator holds the value 0C5<sub>H</sub> (11000101<sub>B</sub>). The instruction

RR    A

leaves the accumulator holding the value 0E2<sub>H</sub> (11100010<sub>B</sub>) with the carry unaffected.

Operation: RR

$(A_n) \leftarrow (A_n + 1) \quad n = 0-6$

$(A_7) \leftarrow (A_0)$

Encoding:

0	0	0	0	0	0	1	1
---	---	---	---	---	---	---	---

Bytes:

1

Cycles:

1



### RRC     A

**Function:** Rotate accumulator right through carry flag

**Description:** The eight bits in the accumulator and the carry flag are together rotated one bit to the right. Bit 0 moves into the carry flag; the original value of the carry flag moves into the bit 7 position. No other flags are affected.

**Example:** The accumulator holds the value 0C5<sub>H</sub> (11000101<sub>B</sub>), the carry is zero. The instruction

RRC     A

leaves the accumulator holding the value 62<sub>H</sub> (01100010<sub>B</sub>) with the carry set.

**Operation:** RRC  
 $(A_n) \leftarrow (A_n + 1) \text{ } n=0-6$   
 $(A_7) \leftarrow (C)$   
 $(C) \leftarrow (A_0)$

**Encoding:**

0	0	0	1	0	0	1	1
---	---	---	---	---	---	---	---

**Bytes:** 1

**Cycles:** 1

### SETB <bit>

Function: Set bit

Description: SETB sets the indicated bit to one. SETB can operate on the carry flag or any directly addressable bit. No other flags are affected.

Example: The carry flag is cleared. Output port 1 has been written with the value 34<sub>H</sub> (00110100<sub>B</sub>). The instructions

```
SETB C
SETB P1.0
```

will leave the carry flag set to 1 and change the data output on port 1 to 35<sub>H</sub> (00110101<sub>B</sub>).

### SETB C

Operation: SETB  
(C) ← 1

Encoding: 

1	1	0	1
---	---	---	---

0	0	1	1
---	---	---	---

Bytes: 1

Cycles: 1

### SETB bit

Operation: SETB  
(bit) ← 1

Encoding: 

1	1	0	1
---	---	---	---

0	0	1	0
---	---	---	---

bit address
-------------

Bytes: 2

Cycles: 1





### **SJMP      rel**

**Function:**      Short jump

**Description:**      Program control branches unconditionally to the address indicated. The branch destination is computed by adding the signed displacement in the second instruction byte to the PC, after incrementing the PC twice. Therefore, the range of destinations allowed is from 128 bytes preceding this instruction to 127 bytes following it.

**Example:**      The label "RELADR" is assigned to an instruction at program memory location 0123<sub>H</sub>. The instruction

**SJMP      RELADR**

will assemble into location 0100<sub>H</sub>. After the instruction is executed, the PC will contain the value 0123<sub>H</sub>.

#### **Note:**

Under the above conditions the instruction following SJMP will be at 102<sub>H</sub>. Therefore, the displacement byte of the instruction will be the relative offset (0123<sub>H</sub> - 0102<sub>H</sub>) = 21<sub>H</sub>. In other words, an SJMP with a displacement of 0FE<sub>H</sub> would be a one-instruction infinite loop.

**Operation:**      SJMP  
                          (PC) ← (PC) + 2  
                          (PC) ← (PC) + rel

**Encoding:**

1	0	0	0
---	---	---	---

0	0	0	0
---	---	---	---

rel. address
--------------

**Bytes:**      2

**Cycles:**      2

### SUBB A, <src-byte>

Function: Subtract with borrow

Description: SUBB subtracts the indicated variable and the carry flag together from the accumulator, leaving the result in the accumulator. SUBB sets the carry (borrow) flag if a borrow is needed for bit 7, and clears C otherwise. (If C was set *before* executing a SUBB instruction, this indicates that a borrow was needed for the previous step in a multiple precision subtraction, so the carry is subtracted from the accumulator along with the source operand). AC is set if a borrow is needed for bit 3, and cleared otherwise. OV is set if a borrow is needed into bit 6 but not into bit 7, or into bit 7 but not bit 6.

When subtracting signed integers OV indicates a negative number produced when a negative value is subtracted from a positive value, or a positive result when a positive number is subtracted from a negative number.

The source operand allows four addressing modes: register, direct, register-indirect, or immediate.

Example: The accumulator holds 0C9<sub>H</sub> (11001001<sub>B</sub>), register 2 holds 54<sub>H</sub> (01010100<sub>B</sub>), and the carry flag is set. The instruction

SUBB A,R2

will leave the value 74<sub>H</sub> (01110100<sub>B</sub>) in the accumulator, with the carry flag and AC cleared but OV set.

Notice that 0C9<sub>H</sub> minus 54<sub>H</sub> is 75<sub>H</sub>. The difference between this and the above result is due to the (borrow) flag being set before the operation. If the state of the carry is not known before starting a single or multiple-precision subtraction, it should be explicitly cleared by a CLR C instruction.

### SUBB A,Rn

Operation: SUBB  
 $(A) \leftarrow (A) - (C) - (Rn)$

Encoding: 

1	0	0	1	1	r	r	r
---	---	---	---	---	---	---	---

Bytes: 1

Cycles: 1

### SUBB A, direct

Operation: SUBB  
 $(A) \leftarrow (A) - (C) - (\text{direct})$

Encoding: 

1	0	0	1
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes: 2

Cycles: 1

### SUBB A, @ Ri

Operation: SUBB  
 $(A) \leftarrow (A) - (C) - ((Ri))$

Encoding: 

1	0	0	1
---	---	---	---

0	1	1	i
---	---	---	---

Bytes: 1

Cycles: 1

### SUBB A, #data

Operation: SUBB  
 $(A) \leftarrow (A) - (C) - \#data$

Encoding: 

1	0	0	1
---	---	---	---

0	1	0	0
---	---	---	---

immediate data
----------------

Bytes: 2

Cycles: 1

### SWAP A

**Function:** Swap nibbles within the accumulator

**Description:** SWAP A interchanges the low and high-order nibbles (four-bit fields) of the accumulator (bits 3-0 and bits 7-4). The operation can also be thought of as a four-bit rotate instruction. No flags are affected.

**Example:** The accumulator holds the value 0C<sub>H</sub> (11000101<sub>B</sub>). The instruction

SWAP A

leaves the accumulator holding the value 5C<sub>H</sub> (01011100<sub>B</sub>).

**Operation:** SWAP  
 $(A3-0) \rightleftharpoons (A7-4), (A7-4) \leftarrow (A3-0)$

**Encoding:**

1	1	0	0	0	1	0	0
---	---	---	---	---	---	---	---

**Bytes:** 1

**Cycles:** 1



### **XCH      A, <byte>**

**Function:** Exchange accumulator with byte variable

**Description:** XCH loads the accumulator with the contents of the indicated variable, at the same time writing the original accumulator contents to the indicated variable. The source/destination operand can use register, direct, or register-indirect addressing.

**Example:** R0 contains the address 20<sub>H</sub>. The accumulator holds the value 3F<sub>H</sub> (00111111<sub>B</sub>). Internal RAM location 20<sub>H</sub> holds the value 75<sub>H</sub> (01110101<sub>B</sub>). The instruction

XCH      A, @R0

will leave RAM location 20<sub>H</sub> holding the value 3F<sub>H</sub> (00111111<sub>B</sub>) and 75<sub>H</sub> (01110101<sub>B</sub>) in the accumulator.

### **XCH      A,Rn**

**Operation:** XCH  
(A)  $\leftrightarrow$  (Rn)

**Encoding:**

1	1	0	0
---	---	---	---

1	r	r	r
---	---	---	---

**Bytes:** 1

**Cycles:** 1

### **XCH      A,direct**

**Operation:** XCH  
(A)  $\leftrightarrow$  (direct)

**Encoding:**

1	1	0	0
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

**Bytes:** 2

**Cycles:** 1

**XCH      A, @ Ri**

Operation:    XCH  
                  (A) ↔ ((Ri))

Encoding:     1 1 0 0 1 0 1 1 1 1

Bytes:         1

Cycles:        1



### **XCHD    A, @Ri**

**Function:**        Exchange digit

**Description:**    XCHD exchanges the low-order nibble of the accumulator (bits 3-0, generally representing a hexadecimal or BCD digit), with that of the internal RAM location indirectly addressed by the specified register. The high-order nibbles (bits 7-4) of each register are not affected. No flags are affected.

**Example:**        R0 contains the address 20<sub>H</sub>. The accumulator holds the value 36<sub>H</sub> (00110110<sub>B</sub>). Internal RAM location 20<sub>H</sub> holds the value 75<sub>H</sub> (01110101<sub>B</sub>). The instruction  
XCHD    A, @ R0  
will leave RAM location 20<sub>H</sub> holding the value 76<sub>H</sub> (01110110<sub>B</sub>) and 35<sub>H</sub> (00110101<sub>B</sub>) in the accumulator.

**Operation:**        XCHD  
                      (A3-0)  $\leftrightarrow$  ((Ri)3-0)

**Encoding:**

1	1	0	1
---	---	---	---

0	1	1	i
---	---	---	---

**Bytes:**            1

**Cycles:**          1

### **XRL      <dest-byte>, <src-byte>**

**Function:** Logical Exclusive OR for byte variables

**Description:** XRL performs the bitwise logical Exclusive OR operation between the indicated variables, storing the results in the destination. No flags are affected.

The two operands allow six addressing mode combinations. When the destination is the accumulator, the source can use register, direct, register-indirect, or immediate addressing; when the destination is a direct address, the source can be accumulator or immediate data.

**Note:**

When this instruction is used to modify an output port, the value used as the original port data will be read from the output data latch, *not* the input pins.

**Example:** If the accumulator holds 0C3<sub>H</sub> (11000011<sub>B</sub>) and register 0 holds 0AA<sub>H</sub> (10101010<sub>B</sub>) then the instruction

XRL      A,R0

will leave the accumulator holding the value 69<sub>H</sub> (01101001<sub>B</sub>).

When the destination is a directly addressed byte, this instruction can complement combinations of bits in any RAM location or hardware register. The pattern of bits to be complemented is then determined by a mask byte, either a constant contained in the instruction or a variable computed in the accumulator at run-time. The instruction

XRL      P1,#00110001B

will complement bits 5, 4, and 0 of output port 1.

### **XRL      A,Rn**

**Operation:** XRL2  
 $(A) \leftarrow (A) \vee (Rn)$

**Encoding:**

0	1	1	0
---	---	---	---

1	r	r	r
---	---	---	---

**Bytes:** 1

**Cycles:** 1



### **XRL      A,direct**

Operation:    XRL  
                    $(A) \leftarrow (A) \vee (\text{direct})$

Encoding:     

0	1	1	0
---	---	---	---

0	1	0	1
---	---	---	---

direct address
----------------

Bytes:        2

Cycles:       1

### **XRL      A, @ Ri**

Operation:    XRL  
                    $(A) \leftarrow (A) \vee ((Ri))$

Encoding:     

0	1	1	0
---	---	---	---

0	1	1	i
---	---	---	---

Bytes:        1

Cycles:       1

### **XRL      A, #data**

Operation:    XRL  
                    $(A) \leftarrow (A) \vee \#data$

Encoding:     

0	1	1	0
---	---	---	---

0	1	0	0
---	---	---	---

immediate data
----------------

Bytes:        2

Cycles:       1

### **XRL      direct,A**

Operation:    XRL  
                    $(\text{direct}) \leftarrow (\text{direct}) \vee (A)$

Encoding:     

0	1	1	0
---	---	---	---

0	0	1	0
---	---	---	---

direct address
----------------

Bytes:        2

Cycles:       1

**XRL      direct, #data**

Operation:      XRL  
                  (direct) ← (direct) ∨ #data

Encoding:      

0	1	1	0	0	0	1	1
---	---	---	---	---	---	---	---

direct address
----------------

immediate data
----------------

Bytes:            3

Cycles:          2



### 4.4 Instruction Set Summary Tables

The following two tables give a survey about the instruction set of the C500 family microcontrollers. In **table 4-3** the instructions are ordered in functional groups. In **table 4-4** the instructions are ordered in the hexadecimal order of their opcode.

#### 4.4.1 Functional Groups of Instructions

**Table 4-3 :**  
**Instruction Set Summary**

Mnemonic	Description	Byte	Cycle
<b>Arithmetic Operations</b>			
ADD A,Rn	Add register to accumulator	1	1
ADD A,direct	Add direct byte to accumulator	2	1
ADD A,@Ri	Add indirect RAM to accumulator	1	1
ADD A,#data	Add immediate data to accumulator	2	1
ADDC A,Rn	Add register to accumulator with carry flag	1	1
ADDC A,direct	Add direct byte to A with carry flag	2	1
ADDC A,@Ri	Add indirect RAM to A with carry flag	1	1
ADDC A,#data	Add immediate data to A with carry flag	2	1
SUBB A,Rn	Subtract register from A with borrow	1	1
SUBB A,direct	Subtract direct byte from A with borrow	2	1
SUBB A,@Ri	Subtract indirect RAM from A with borrow	1	1
SUBB A,#data	Subtract immediate data from A with borrow	2	1
INC A	Increment accumulator	1	1
INC Rn	Increment register	1	1
INC direct	Increment direct byte	2	1
INC @Ri	Increment indirect RAM	1	1
DEC A	Decrement accumulator	1	1
DEC Rn	Decrement register	1	1
DEC direct	Decrement direct byte	2	1
DEC @Ri	Decrement indirect RAM	1	1
INC DPTR	Increment data pointer	1	2
MUL AB	Multiply A and B	1	4
DIV AB	Divide A by B	1	4
DA A	Decimal adjust accumulator	1	1

**Table 4-3 :**  
**Instruction Set Summary (cont'd)**

Mnemonic	Description	Byte	Cycle
<b>Logic Operations</b>			
ANL A,Rn	AND register to accumulator	1	1
ANL A,direct	AND direct byte to accumulator	2	1
ANL A,@Ri	AND indirect RAM to accumulator	1	1
ANL A,#data	AND immediate data to accumulator	2	1
ANL direct,A	AND accumulator to direct byte	2	1
ANL direct,#data	AND immediate data to direct byte	3	2
ORL A,Rn	OR register to accumulator	1	1
ORL A,direct	OR direct byte to accumulator	2	1
ORL A,@Ri	OR indirect RAM to accumulator	1	1
ORL A,#data	OR immediate data to accumulator	2	1
ORL direct,A	OR accumulator to direct byte	2	1
ORL direct,#data	OR immediate data to direct byte	3	2
XRL A,Rn	Exclusive OR register to accumulator	1	1
XRL A direct	Exclusive OR direct byte to accumulator	2	1
XRL A,@Ri	Exclusive OR indirect RAM to accumulator	1	1
XRL A,#data	Exclusive OR immediate data to accumulator	2	1
XRL direct,A	Exclusive OR accumulator to direct byte	2	1
XRL direct,#data	Exclusive OR immediate data to direct byte	3	2
CLR A	Clear accumulator	1	1
CPL A	Complement accumulator	1	1
RL A	Rotate accumulator left	1	1
RLC A	Rotate accumulator left through carry	1	1
RR A	Rotate accumulator right	1	1
RRC A	Rotate accumulator right through carry	1	1
SWAP A	Swap nibbles within the accumulator	1	1

**Table 4-3 :**  
**Instruction Set Summary (cont'd)**

Mnemonic	Description	Byte	Cycle
<b>Data Transfer</b>			
MOV A,Rn	Move register to accumulator	1	1
MOV A,direct	Move direct byte to accumulator	2	1
MOV A,@Ri	Move indirect RAM to accumulator	1	1
MOV A,#data	Move immediate data to accumulator	2	1
MOV Rn,A	Move accumulator to register	1	1
MOV Rn,direct	Move direct byte to register	2	2
MOV Rn,#data	Move immediate data to register	2	1
MOV direct,A	Move accumulator to direct byte	2	1
MOV direct,Rn	Move register to direct byte	2	2
MOV direct,direct	Move direct byte to direct byte	3	2
MOV direct,@Ri	Move indirect RAM to direct byte	2	2
MOV direct,#data	Move immediate data to direct byte	3	2
MOV @Ri,A	Move accumulator to indirect RAM	1	1
MOV @Ri,direct	Move direct byte to indirect RAM	2	2
MOV @Ri,#data	Move immediate data to indirect RAM	2	1
MOV DPTR,#data16	Load data pointer with a 16-bit constant	3	2
MOVC A,@A + DPTR	Move code byte relative to DPTR to accumulator	1	2
MOVC A,@A + PC	Move code byte relative to PC to accumulator	1	2
MOVB A,@Ri	Move external RAM (8-bit addr.) to A	1	2
MOVB A,@DPTR	Move external RAM (16-bit addr.) to A	1	2
MOVB @Ri,A	Move A to external RAM (8-bit addr.)	1	2
MOVB @DPTR,A	Move A to external RAM (16-bit addr.)	1	2
PUSH direct	Push direct byte onto stack	2	2
POP direct	Pop direct byte from stack	2	2
XCH A,Rn	Exchange register with accumulator	1	1
XCH A,direct	Exchange direct byte with accumulator	2	1
XCH A,@Ri	Exchange indirect RAM with accumulator	1	1
XCHD A,@Ri	Exchange low-order nibble indir. RAM with A	1	1

1) MOV A,ACC is not a valid instruction

**Table 4-3 :**  
**Instruction Set Summary (cont'd)**

Mnemonic	Description	Byte	Cycle
----------	-------------	------	-------

### Boolean Variable Manipulation

CLR	C	Clear carry flag	1	1
CLR	bit	Clear direct bit	2	1
SETB	C	Set carry flag	1	1
SETB	bit	Set direct bit	2	1
CPL	C	Complement carry flag	1	1
CPL	bit	Complement direct bit	2	1
ANL	C,bit	AND direct bit to carry flag	2	2
ANL	C,/bit	AND complement of direct bit to carry	2	2
ORL	C,bit	OR direct bit to carry flag	2	2
ORL	C,/bit	OR complement of direct bit to carry	2	2
MOV	C,bit	Move direct bit to carry flag	2	1
MOV	bit,C	Move carry flag to direct bit	2	2

### Program and Machine Control

ACALL	addr11	Absolute subroutine call	2	2
LCALL	addr16	Long subroutine call	3	2
RET		Return from subroutine	1	2
RETI		Return from interrupt	1	2
AJMP	addr11	Absolute jump	2	2
LJMP	addr16	Long jump	3	2
SJMP	rel	Short jump (relative addr.)	2	2
JMP	@A + DPTR	Jump indirect relative to the DPTR	1	2
JZ	rel	Jump if accumulator is zero	2	2
JNZ	rel	Jump if accumulator is not zero	2	2
JC	rel	Jump if carry flag is set	2	2
JNC	rel	Jump if carry flag is not set	2	2
JB	bit,rel	Jump if direct bit is set	3	2
JNB	bit,rel	Jump if direct bit is not set	3	2
JBC	bit,rel	Jump if direct bit is set and clear bit	3	2
CJNE	A,direct,rel	Compare direct byte to A and jump if not equal	3	2

**Table 4-3 :**  
**Instruction Set Summary (cont'd)**

Mnemonic	Description	Byte	Cycle
----------	-------------	------	-------

**Program and Machine Control (cont'd)**

CJNE A,#data,rel	Compare immediate to A and jump if not equal	3	2
CJNE Rn,#data rel	Compare immed. to reg. and jump if not equal	3	2
CJNE @Ri,#data,rel	Compare immed. to ind. and jump if not equal	3	2
DJNZ Rn,rel	Decrement register and jump if not zero	2	2
DJNZ direct,rel	Decrement direct byte and jump if not zero	3	2
NOP	No operation	1	1

### 4.4.2 Hexadecimal Ordered Instructions

**Table 4-4 :**  
**Instruction List in Hexadecimal Order**

Op-Code	Mnemonic	Op-Code	Mnemonic	Op-Code	Mnemonic
00 <sub>H</sub>	NOP	20 <sub>H</sub>	JB bit.rel	40 <sub>H</sub>	JC rel
01 <sub>H</sub>	AJMP addr11	21 <sub>H</sub>	AJMP addr11	41 <sub>H</sub>	AJMP addr11
02 <sub>H</sub>	LJMP addr16	22 <sub>H</sub>	RET	42 <sub>H</sub>	ORL direct,A
03 <sub>H</sub>	RR A	23 <sub>H</sub>	RL A	43 <sub>H</sub>	ORL direct,#data
04 <sub>H</sub>	INC A	24 <sub>H</sub>	ADD A,#data	44 <sub>H</sub>	ORL A,#data
05 <sub>H</sub>	INC direct	25 <sub>H</sub>	ADD A,direct	45 <sub>H</sub>	ORL A,direct
06 <sub>H</sub>	INC @R0	26 <sub>H</sub>	ADD A,@R0	46 <sub>H</sub>	ORL A,@R0
07 <sub>H</sub>	INC @R1	27 <sub>H</sub>	ADD A,@R1	47 <sub>H</sub>	ORL A,@R1
08 <sub>H</sub>	INC R0	28 <sub>H</sub>	ADD A,R0	48 <sub>H</sub>	ORL A,R0
09 <sub>H</sub>	INC R1	29 <sub>H</sub>	ADD A,R1	49 <sub>H</sub>	ORL A,R1
0A <sub>H</sub>	INC R2	2A <sub>H</sub>	ADD A,R2	4A <sub>H</sub>	ORL A,R2
0B <sub>H</sub>	INC R3	2B <sub>H</sub>	ADD A,R3	4B <sub>H</sub>	ORL A,R3
0C <sub>H</sub>	INC R4	2C <sub>H</sub>	ADD A,R4	4C <sub>H</sub>	ORL A,R4
0D <sub>H</sub>	INC R5	2D <sub>H</sub>	ADD A,R5	4D <sub>H</sub>	ORL A,R5
0E <sub>H</sub>	INC R6	2E <sub>H</sub>	ADD A,R6	4E <sub>H</sub>	ORL A,R6
0F <sub>H</sub>	INC R7	2F <sub>H</sub>	ADD A,R7	4F <sub>H</sub>	ORL A,R7
10 <sub>H</sub>	JBC bit,rel	30 <sub>H</sub>	JNB bit.rel	50 <sub>H</sub>	JNC rel
11 <sub>H</sub>	ACALL addr11	31 <sub>H</sub>	ACALL addr11	51 <sub>H</sub>	ACALL addr11
12 <sub>H</sub>	LCALL addr16	32 <sub>H</sub>	RETI	52 <sub>H</sub>	ANL direct,A
13 <sub>H</sub>	RRC A	33 <sub>H</sub>	RLC A	53 <sub>H</sub>	ANL direct,#data
14 <sub>H</sub>	DEC A	34 <sub>H</sub>	ADDC A,#data	54 <sub>H</sub>	ANL A,#data
15 <sub>H</sub>	DEC direct	35 <sub>H</sub>	ADDC A,direct	55 <sub>H</sub>	ANL A,direct
16 <sub>H</sub>	DEC @R0	36 <sub>H</sub>	ADDC A,@R0	56 <sub>H</sub>	ANL A,@R0
17 <sub>H</sub>	DEC @R1	37 <sub>H</sub>	ADDC A,@R1	57 <sub>H</sub>	ANL A,@R1
18 <sub>H</sub>	DEC R0	38 <sub>H</sub>	ADDC A,R0	58 <sub>H</sub>	ANL A,R0
19 <sub>H</sub>	DEC R1	39 <sub>H</sub>	ADDC A,R1	59 <sub>H</sub>	ANL A,R1
1A <sub>H</sub>	DEC R2	3A <sub>H</sub>	ADDC A,R2	5A <sub>H</sub>	ANL A,R2
1B <sub>H</sub>	DEC R3	3B <sub>H</sub>	ADDC A,R3	5B <sub>H</sub>	ANL A,R3
1C <sub>H</sub>	DEC R4	3C <sub>H</sub>	ADDC A,R4	5C <sub>H</sub>	ANL A,R4
1D <sub>H</sub>	DEC R5	3D <sub>H</sub>	ADDC A,R5	5D <sub>H</sub>	ANL A,R5
1E <sub>H</sub>	DEC R6	3E <sub>H</sub>	ADDC A,R6	5E <sub>H</sub>	ANL A,R6
1F <sub>H</sub>	DEC R7	3F <sub>H</sub>	ADDC A,R7	5F <sub>H</sub>	ANL A,R7



**Table 4-4 :**  
**Instruction List in Hexadecimal Order (cont'd)**

Op-Code	Mnemonic	Op-Code	Mnemonic	Op-Code	Mnemonic
60 <sub>H</sub>	JZ rel	80 <sub>H</sub>	SJMP rel	A0 <sub>H</sub>	ORL C,/bit
61 <sub>H</sub>	AJMP addr11	81 <sub>H</sub>	AJMP addr11	A1 <sub>H</sub>	AJMP addr11
62 <sub>H</sub>	XRL direct,A	82 <sub>H</sub>	ANL C,bit	A2 <sub>H</sub>	MOV C,bit
63 <sub>H</sub>	XRL direct,#data	83 <sub>H</sub>	MOVC A,@A+DPTR	A3 <sub>H</sub>	INC DPTR
64 <sub>H</sub>	XRL A,#data	84 <sub>H</sub>	DIV AB	A4 <sub>H</sub>	MUL AB
65 <sub>H</sub>	XRL A,direct	85 <sub>H</sub>	MOV direct,direct	A5 <sub>H</sub>	-
66 <sub>H</sub>	XRL A,@R0	86 <sub>H</sub>	MOV direct,R0	A6 <sub>H</sub>	MOV @R0,direct
67 <sub>H</sub>	XRL A,@R1	87 <sub>H</sub>	MOV direct,R1	A7 <sub>H</sub>	MOV @R1,direct
68 <sub>H</sub>	XRL A,R0	88 <sub>H</sub>	MOV direct,R0	A8 <sub>H</sub>	MOV R0,direct
69 <sub>H</sub>	XRL A,R1	89 <sub>H</sub>	MOV direct,R1	A9 <sub>H</sub>	MOV R1,direct
6A <sub>H</sub>	XRL A,R2	8A <sub>H</sub>	MOV direct,R2	AA <sub>H</sub>	MOV R2,direct
6B <sub>H</sub>	XRL A,R3	8B <sub>H</sub>	MOV direct,R3	AB <sub>H</sub>	MOV R3,direct
6C <sub>H</sub>	XRL A,R4	8C <sub>H</sub>	MOV direct,R4	AC <sub>H</sub>	MOV R4,direct
6D <sub>H</sub>	XRL A,R5	8D <sub>H</sub>	MOV direct,R5	AD <sub>H</sub>	MOV R5,direct
6E <sub>H</sub>	XRL A,R6	8E <sub>H</sub>	MOV direct,R6	AE <sub>H</sub>	MOV R6,direct
6F <sub>H</sub>	XRL A,R7	8F <sub>H</sub>	MOV direct,R7	AF <sub>H</sub>	MOV R7,direct
70 <sub>H</sub>	JNZ rel	90 <sub>H</sub>	MOV DPTR,#data16	B0 <sub>H</sub>	ANL C,/bit
71 <sub>H</sub>	ACALL addr11	91 <sub>H</sub>	ACALL addr11	B1 <sub>H</sub>	ACALL addr11
72 <sub>H</sub>	ORL C,direct	92 <sub>H</sub>	MOV bit,C	B2 <sub>H</sub>	CPL bit
73 <sub>H</sub>	JMP @A+DPTR	93 <sub>H</sub>	MOVC A,@A+DPTR	B3 <sub>H</sub>	CPL C
74 <sub>H</sub>	MOV A,#data	94 <sub>H</sub>	SUBB A,#data	B4 <sub>H</sub>	CJNE A,#data,rel
75 <sub>H</sub>	MOV direct,#data	95 <sub>H</sub>	SUBB A,direct	B5 <sub>H</sub>	CJNE A,direct,rel
76 <sub>H</sub>	MOV @R0,#data	96 <sub>H</sub>	SUBB A,@R0	B6 <sub>H</sub>	CJNE @R0,#data,rel
77 <sub>H</sub>	MOV @R1,#data	97 <sub>H</sub>	SUBB A,@R1	B7 <sub>H</sub>	CJNE @R1,#data,rel
78 <sub>H</sub>	MOV R0.#data	98 <sub>H</sub>	SUBB A,R0	B8 <sub>H</sub>	CJNE R0,#data,rel
79 <sub>H</sub>	MOV R1.#data	99 <sub>H</sub>	SUBB A,R1	B9 <sub>H</sub>	CJNE R1,#data,rel
7A <sub>H</sub>	MOV R2.#data	9A <sub>H</sub>	SUBB A,R2	BA <sub>H</sub>	CJNE R2,#data,rel
7B <sub>H</sub>	MOV R3.#data	9B <sub>H</sub>	SUBB A,R3	BB <sub>H</sub>	CJNE R3,#data,rel
7C <sub>H</sub>	MOV R4.#data	9C <sub>H</sub>	SUBB A,R4	BC <sub>H</sub>	CJNE R4,#data,rel
7D <sub>H</sub>	MOV R5.#data	9D <sub>H</sub>	SUBB A,R5	BD <sub>H</sub>	CJNE R5,#data,rel
7E <sub>H</sub>	MOV R6.#data	9E <sub>H</sub>	SUBB A,R6	BE <sub>H</sub>	CJNE R6,#data,rel
7F <sub>H</sub>	MOV R7.#data	9F <sub>H</sub>	SUBB A,R7	BF <sub>H</sub>	CJNE R7,#data,rel

**Table 4-4 :**  
**Instruction List in Hexadecimal Order (cont'd)**

Op-Code	Mnemonic	Op-Code	Mnemonic
C0 <sub>H</sub>	PUSH direct	E0 <sub>H</sub>	MOVX A,@DPTR
C1 <sub>H</sub>	AJMP addr11	E1 <sub>H</sub>	AJMP addr11
C2 <sub>H</sub>	CLR bit	E2 <sub>H</sub>	MOVX A,@R0
C3 <sub>H</sub>	CLR C	E3 <sub>H</sub>	MOVX A,@R1
C4 <sub>H</sub>	SWAP A	E4 <sub>H</sub>	CLR A
C5 <sub>H</sub>	XCH A,direct	E5 <sub>H</sub>	MOV A,direct
C6 <sub>H</sub>	XCH A,@R0	E6 <sub>H</sub>	MOV A,@R0
C7 <sub>H</sub>	XCH A,@R1	E7 <sub>H</sub>	MOV A,@R1
C8 <sub>H</sub>	XCH A,R0	E8 <sub>H</sub>	MOV A,R0
C9 <sub>H</sub>	XCH A,R1	E9 <sub>H</sub>	MOV A,R1
CA <sub>H</sub>	XCH A,R2	EA <sub>H</sub>	MOV A,R2
CB <sub>H</sub>	XCH A,R3	EB <sub>H</sub>	MOV A,R3
CC <sub>H</sub>	XCH A,R4	EC <sub>H</sub>	MOV A,R4
CD <sub>H</sub>	XCH A,R5	ED <sub>H</sub>	MOV A,R5
CE <sub>H</sub>	XCH A,R6	EE <sub>H</sub>	MOV A,R6
CF <sub>H</sub>	XCH A,R7	EF <sub>H</sub>	MOV A,R7
D0 <sub>H</sub>	POP direct	F0 <sub>H</sub>	MOVX @DPTR,A
D1 <sub>H</sub>	ACALL addr11	F1 <sub>H</sub>	ACALL addr11
D2 <sub>H</sub>	SETB bit	F2 <sub>H</sub>	MOVX @R0,A
D3 <sub>H</sub>	SETB C	F3 <sub>H</sub>	MOVX @R1,A
D4 <sub>H</sub>	DA A	F4 <sub>H</sub>	CPL A
D5 <sub>H</sub>	DJNZ direct,rel	F5 <sub>H</sub>	MOV direct,A
D6 <sub>H</sub>	XCHD A,@R0	F6 <sub>H</sub>	MOV @R0,A
D7 <sub>H</sub>	XCHD A,@R1	F7 <sub>H</sub>	MOV @R1,A
D8 <sub>H</sub>	DJNZ R0,rel	F8 <sub>H</sub>	MOV R0,A
D9 <sub>H</sub>	DJNZ R1,rel	F9 <sub>H</sub>	MOV R1,A
DA <sub>H</sub>	DJNZ R2,rel	FA <sub>H</sub>	MOV R2,A
DB <sub>H</sub>	DJNZ R3,rel	FB <sub>H</sub>	MOV R3,A
DC <sub>H</sub>	DJNZ R4,rel	FC <sub>H</sub>	MOV R4,A
DD <sub>H</sub>	DJNZ R5,rel	FD <sub>H</sub>	MOV R5,A
DE <sub>H</sub>	DJNZ R6,rel	FE <sub>H</sub>	MOV R6,A
DF <sub>H</sub>	DJNZ R7,rel	FF <sub>H</sub>	MOV R7,A



---

## Package Information

---






### 5 Package Information

This chapter shows typical package outlines of the packages which are actually used for the microcontrollers of the C500 family. The appropriate data sheet should always be regarded when the package of a specific C500 microcontroller has to be referenced.


#### 5.1 P-DIP Package

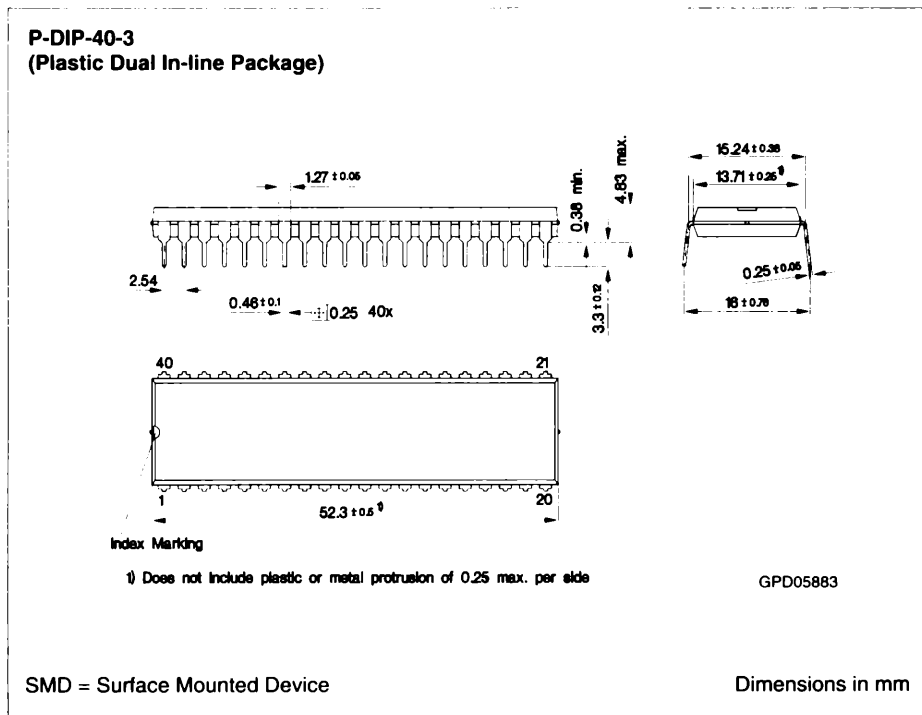

**Figure 5-1**  
**P-DIP-40-3 Package Outlines**

### 5.2 PLCC Packages

#### P-LCC-44-2 (SMD) (Plastic Leaded Chip Carrier Package)

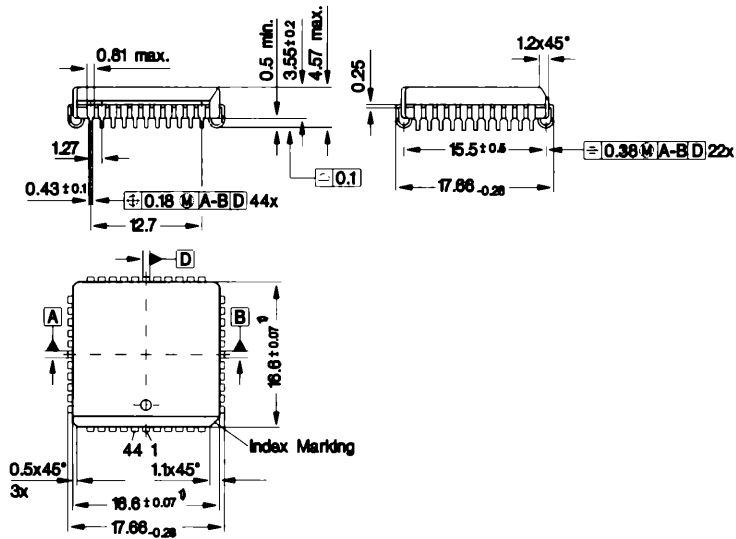

1) Does not include plastic or metal protrusion of 0.15 max. per side

GPL05102

SMD = Surface Mounted Device


Dimensions in mm

**Figure 5-2**  
**P-LCC-44-2 Package Outlines**





### P-LCC-84-2 (SMD) (Plastic Leaded Chip Carrier Package)

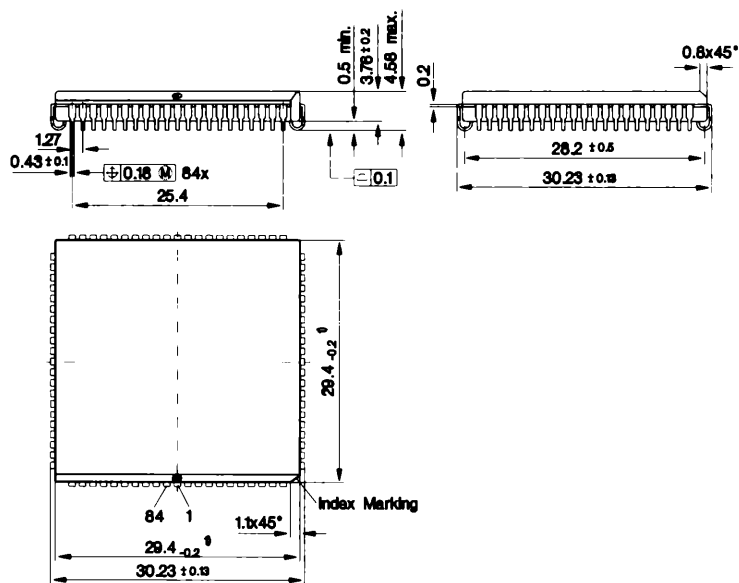

1) Does not include plastic or metal protrusion of 0.25 max. per side

GPM05620


SMD = Surface Mounted Device

Dimensions in mm

**Figure 5-4**  
**P-LCC-84-2 Package Outline**

### 5.3 MQFP Packages

#### P-MQFP-44-2 (SMD) (Plastic Metric Quad Flat Package)

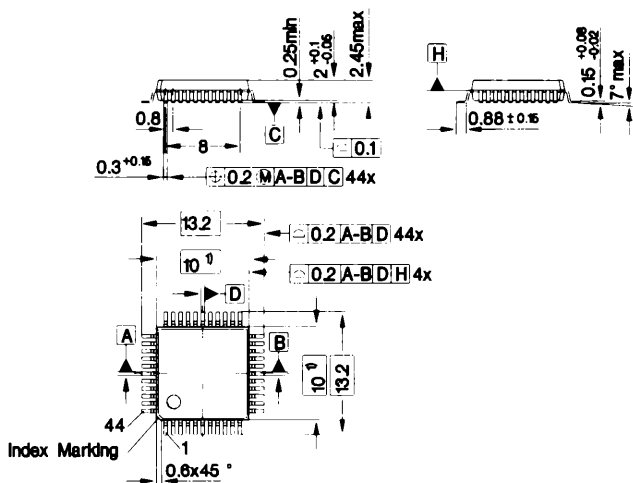

1) Does not include plastic or metal protrusion of 0.25 max. per side

GPM05622


SMD = Surface Mounted Device

Dimensions in mm

**Figure 5-5**  
**P-MQFP-44-2 Package Outline**



**P-MQFP-100-2 (SMD)**  
(Plastic Metric Quad Flat Package, rectangular)

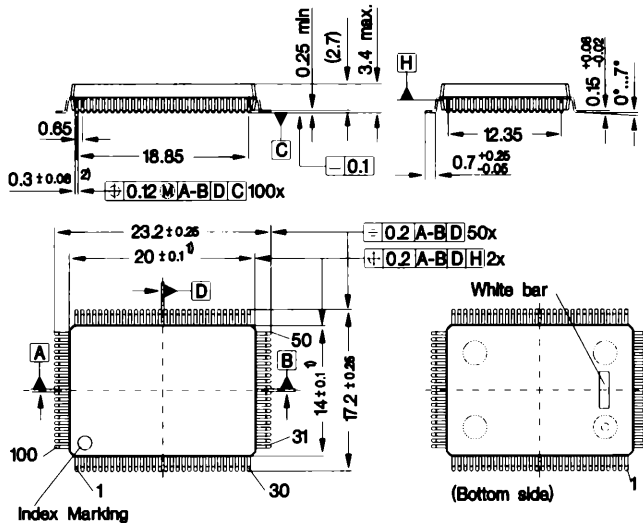


- 2) Does not include dambar protrusion of 0.08 max. per side  
1) Does not include plastic or metal protrusion of 0.25 max. per side

GPM05623

SMD = Surface Mounted Device

Dimensions in mm


**Figure 5-7**  
**P-MQFP-100-2 Package Outline**

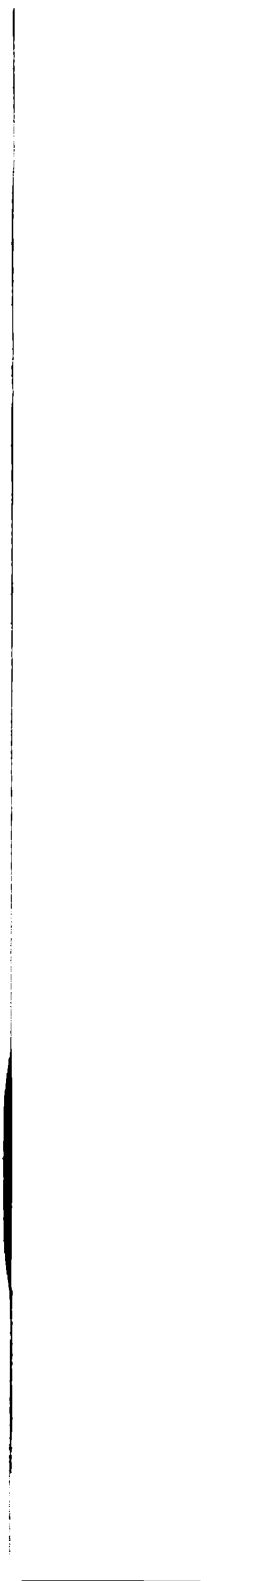

**Microelectronics Training Center  
Information on Literature  
Semiconductor Group – Addresses**

---



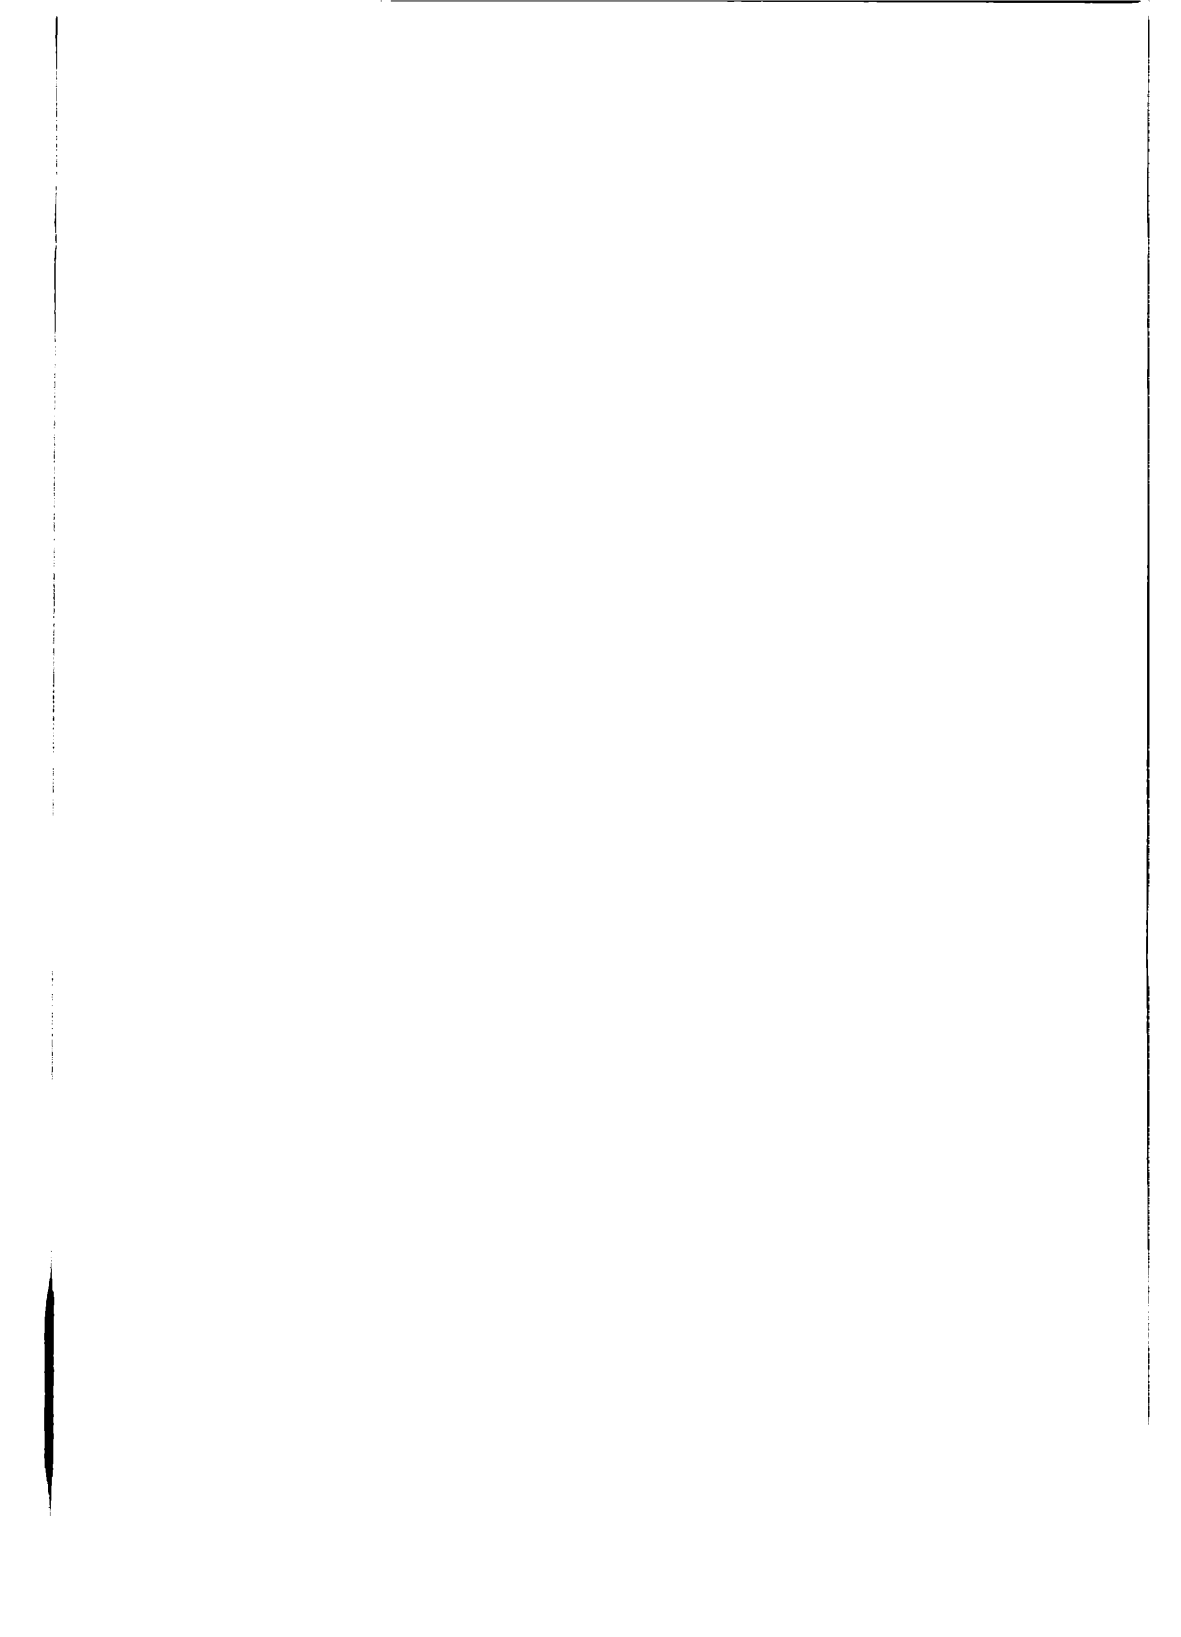

## Gehen Sie auf Erfolgskurs!

### Programm SS 1996 der Schule für Mikroelektronik

Das Angebot: ca. 130 Kurse von April bis Ende September 1996 zu aktuellen Themen der Mikroelektronik. Praxisorientierte Ausrichtung, modernste Ausstattung, pädagogisch aufbereitetes Kursmaterial und die intensive Betreuung durch Fachdozenten garantieren den Lernerfolg.

#### Highlights aus dem Kursprogramm:

- 8-bit MC-Familie 8051/C500
- 16-bit MC-Familie C166
- Fuzzy-Logic
- ISDN, Telecom
- Rechnerfamilie 80x86/Pentium
- Hardwarebeschreibungssprache VHDL
- BLS Board Level Simulation
- Software:  
Sprachen C, C++  
Betriebssysteme RMOS, Windows, UNIX  
– Windows Programmierung
- Personalcomputer
- Netze, LWL
- EMV
- Leistungshalbleiter
- Halbleitertechnologie

Auf Wunsch

„maßgeschneiderte“ Kurse in deutscher und englischer Sprache in Ihrer Firma!

Programmübersicht erhalten Sie kostenlos bei:

**MicroConsult GmbH**  
**Schule für Mikroelektronik**  
**Rosenheimer Str. 143 b**

**Frau Kandlbinder**

**D-81671 München**

**Tel. (089) 4506 17-0**

**Fax (089) 4506 17-17**

Leistungsbeweis '95: 2.400 Kurs-Teilnehmer!

## Hit the Road to Success!

### SS 1996 Program of the Microelectronics Training Center

What is offered: e.g. 130 courses from April through to the end of September 1996 on current topics from the field of microelectronics. Practical orientation, the very latest aids, course material devised to modern pedagogic guidelines and intensive support from specialist lectures guarantee learning with success.

#### Program highlights:

- 8-bit MC family 8051/C500
- 16-bit MC family C166
- Fuzzy logic
- ISDN, telecom
- 80x86/Pentium computer family
- VHDL hardware description language
- BLS Board Level Simulation
- Software:  
C, C++ languages  
RMOS, Windows, UNIX operating systems  
– Windows programming
- Personal computers
- Networks, fiber optics
- EMC
- Power semiconductors
- Semiconductor technology

On request

“tailored” courses on your premises!

Call or write for a free syllabus:

**MicroConsult GmbH**  
**Schule für Mikroelektronik**  
**Rosenheimer Str. 143 b**

**Frau Kandlbinder**

**D-81671 München**

**Tel. (089) 4506 17-0**

**Fax (089) 4506 17-17**

Popularity curve: 2.400 course participants in 1995!



## Hinweise für Ihre Literatur-Bestellung

Folgende Hinweise gelten nur für Bestellungen innerhalb Deutschlands.

Richten Sie bitte Ihre Bestellung an

Siemens AG

ID - LZF - Semiconductor Book Shop

Postfach 2352

D - 90713 Fürth-Bislohe

Tel.: (0911) 654-4220/4224

Fax: (0911) 654-4238

Vergessen Sie bitte nicht, Ihre Adresse bzw. die Lieferanschrift deutlich anzugeben und - falls bekannt - auch Ihre Kundennummer.

Zahlung: Sofort nach Rechnungserhalt ohne Abzug.

Preisstellung ab Lieferort ausschließlich Verpackung, Versand und Versicherung. Die Preise gelten ausschließlich für gewerbliche Abnehmer und enthalten keine Mehrwertsteuer. Soweit für den Wiederverkauf von der Preisliste Gebrauch gemacht wird, handelt es sich um unverbindliche Preisempfehlungen.

Änderungen der angegebenen Preise behalten wir uns vor.

Siemens-Dienststellen und verbundene Unternehmen bestellen bitte mit dem Bestellzettel H38-S2009 (Inland) bzw. H38-S2021 (Ausland). Bestellungen über DV-Bestellverfahren richten Sie bitte an den BZ-Empfänger G58AG in Fürth.

Druckschriften zu Halbleitern für die Anwendung in der Automobil- und in der Industrielektronik finden Sie unter **"Leistungshalbleiter"**.

## How to order Literature

The following only applies to orders placed in Germany.

Send your order to

Siemens AG

ID - LZF - Semiconductor Book Shop

Postfach 2352

D - 90713 Fürth-Bislohe

Tel.: (0911) 654-4220/4224

Fax: (0911) 654-4238

Please make sure that you have stated clearly your address and the ordering number(s) of the literature in question.

Payment: after receipt of invoice without any deductions.

The prices are valid ex place of delivery, excluding packing, dispatch and insurance. They are exclusively for business users and include no value-added tax. If the price list is used for purposes of resale, the prices are recommended retail prices.

The prices are subject to change without notice.

Siemens offices and associated companies are requested to use ordering form H38-S2021 or to send orders direct by DP to receiver G58AG in Fürth.

Literature on the application of industrial and automotive ICs can be found under **"Power Semiconductors"**.

**Sprachenschlüssel der Bestellnummern**

Englisch	-X-X-7600
Deutsch/Englisch	-X-X-7400
Deutsch	ohne

**Language Code of Ordering No.**

English	-X-X-7600
German/English	-X-X-7400
German	without

**Inhalte der Druckschriften-Arten****Datenbuch (DB)**

Sammlung der zu den Produktfamilien gehörenden Datenblätter, zusätzlich allgemeine Hinweise (Verarbeitung, Lagerung, Qualität, Anwendung).

**Datenblatt (DA)**

Es enthält alle für den Anwender des Halbleiters erforderlichen Angaben.

**Produktschrift (PS)**

Ausführliche Beschreibung zur Funktion und Anwendung der Halbleiter, z.T. mit Auszügen aus dem Datenblatt.

**Themenbuch (TB)**

Anwendungsorientierte Themen, z.B.  
 — Digitales Fernsehen  
 — Schaltnetzteile  
 — Anwendungsbeispiele  
 — Qualität und Zuverlässigkeit  
 — User's Manual.

**Lieferprogramm (LM)**

Überblick der lieferbaren Halbleiter. Technische Angaben beschränken sich auf das Notwendigste.

**▼ Neuerscheinung**

Preisgruppe	Preis
Preisgruppe I	DM 5,00
Preisgruppe II	DM 10,00
Preisgruppe III	DM 20,00
Preisgruppe IV	DM 30,00
Preisgruppe V	DM 40,00
Preisgruppe VI	DM 60,00

**Classification of Technical Publications****Data Book (DB)**

Collection of Data Sheets belonging to the product families, including general notes (processing, storage, quality, application).

**Data Sheet (DA)**

Contains all details necessary for the user of the semiconductor.

**Product Information (PS)**

Detailed description of operation and application of semiconductors, sometimes with extracts from the Data Sheet.

**Special Subject Book (TB)**

Application-oriented subjects, e.g.  
 — Digital television  
 — Switch-mode power supplies  
 — Application Notes  
 — Quality and reliability  
 — User's Manual.

**Short Form Catalog (LM)**

Overview of semiconductors in production program. Technical details are confined to essentials.

**▼ New Edition**

Price group	Price
Price group I	DM 5,00
Price group II	DM 10,00
Price group III	DM 20,00
Price group IV	DM 30,00
Price group V	DM 40,00
Price group VI	DM 60,00

# Allgemeines / General

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
<b>Bereich Halbleiter Semiconductor Group</b>					
▼ Gehäuse- / Package Information	B192-H6636-G1-X-7400	DB	10.95	496	V
Thermische Eigenschaften von Halbleiter- Gehäusen / Thermal Characteristics of Semiconductor Packages	B192-H6805-X-X-7400	TB	09.94	80	II
Global PartnerChip for Systems on Silicon Bereich Halbleiter	B191-H6801	TB	09.94	20	—
Global PartnerChip for Systems on Silicon Semiconductor Group	B191-H6801-G1-X-7600	TB	05.95	20	—
Global PartnerChip for Systems on Silicon Bereich Halbleiter - Mini-Version	B191-H6810-G1	TB	09.94	20	—
Global PartnerChip for Systems on Silicon Semiconductor Group - Mini-Version	B191-H6810-X-X-7600	TB	09.94	20	—
Systems on Silicon Ihr Technologiepartner in Europa	B191-H6752	TB	02.94	24	—
Systems on Silicon PartnerChip in Technology in Europe	B191-H6752-X-X-7600	TB	02.94	24	—
▼ Medizinische Versorgung in der Halbleiterfertigung	B191-H6931	TB	10.95	20	—
▼ Preventive Medicine in Semiconductor Manufacture	B191-H6931-X-X-7600	TB	10.95	20	—
▼ Kompetenz auf der ganzen Linie	B191-H6923	TB	09.95	24	—
Halbleiter Kenndaten für Studierende	A19100-L531-F303-1	TB	09.90	252	—
Technical information and characteristic data for students	A19100-L531-F334-1- 7600	TB	09.90	252	—
Elektronische Bauelemente kurz erklärt	A19100-L531-F169	TB	1991	235	69,-
Multimedia and Personal Communication Realizing a New Vision	B191-H6734-X-X-7600	TB	06.93	14	—
Qualitätsordnung / Quality Policy	B191-H6683-X-X-7400	TB	12.92	12	—
Qualitätssicherung Integr. Schaltungen	B192-H6662	TB	10.92	24	—
Quality Assurance Integrated Circuits	B192-H6662-X-X-7600	TB	10.92	24	—
HL QS - Ihr Qualitäts-Partner	B191-H6603	TB	05.92	14	—
HL QS - Your partner for quality	B191-H6603-X-X-7600	TB	07.92	14	—
"Qualität bringt Gewinn" und "Qualität ist machbar"	B191-H6433	TB	03.91	24	—
"Quality is Free" and "Quality without Tears"	B191-H6433-X-X-7600	TB	03.91	24	—

## Allgemeines / General

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
Abkürzungen zum Thema Qualität Abbreviations of Quality Terms	B191-H6713-X-X-7400	TB	04.93	40	—
Die Verpackungsordnung	B191-H6681	TB	12.92	2	—
Weg aus der Krise	B191-H6434	TB	03.91	20	—
Out of the Crisis	B191-H6434-X-X-7600	TB	03.91	20	—
Halbleiterfertigung in Villach	B191-H6715-G1	TB	10.93	16	—
Semiconductor fabrication in Villach	B191-H6715-V1-X-7600	TB	07.93	16	—
▼ High-Tech in europäischer Dimension Halbleiter Werk in Dresden The European Dimension in High-Tech Dresden Semiconductor Plant	B191-H6932-X-X-7400	TB	10.95	16	—
Wir bauen für die Zukunft Siemens Microelectronics Center Dresden	B191-H6794	TB	11.94	24	—
Building for the Future Siemens Microelectronics Center Dresden	B191-H6794-X-X-7600	TB	06.94	12	—
▼ Die Welt der Chips	B191-H6843	TB	03.95	20	—
▼ The World of Chips	B191-H6843-X-X-7600	TB	03.95	20	—
Bausteine für den Fortschritt	B191-H6766	TB	10.94	12	—
Vorteile durch Etikettierung	B191-H6783-G1-X-7400	TB	12.94	20	—
Der Umwelt verpflichtet	B191-H6803	TB	10.94	20	—
Serving the Environment	B191-H6803-X-X-7600	TB	10.94	20	—
Mikroelektronik: Märkte, Megatechnik, Massenfertigung	B191-H6516	TB	09.91	20	—
Wir setzen Signale	B143-H6824-G1	TB	03.95	16	—
The Signaling Light	B143-H6824-G1-X-7600	TB	03.95	16	—
<b>Lieferprogramme</b> <b>Short Form Catalogs</b>					
▼ Bereich Halbleiter (Vorzugstypen) Semiconductor Group (Preferred Types)	B192-H6780-G2-X-7400	LM	04.96	136	—
▼ Literaturverzeichnis Literature Guide	B192-H6763-G3-X-7400	LM	03.96	32	—
Branchenspezifische IC, Standard IC Dedicated ICs, Standard ICs	B192-H6721-G1-X-7400	LM	04.95	124	—
▼ Opto Halbleiter und Sensoren Optoelectronic Semiconductors a. Sensors	B143-H6576-G2-X-7400	LM	03.96	160	—
▼ Einzelhalbleiter, Leistungshalbleiter Small-Signal Semiconductors Power Semiconductors	B192-H6804-G1-X-7400	LM	03.96	120	—

## Allgemeines / General

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
----------------	------------------------------	---------------	--------------------	---------------	----------------

### CD-ROM

- ▼ Alle Produktinformationen aus Datenbüchern und Datenblättern mit Texten, Bildern und Grafiken

All current product information (text, illustrations and graphics) from data books and data sheets

B192-H6641-X6-1-7400 TB 03.96 — 39,-

Anwendungsbeispiele; User's Manuals

Application Notes; User's Manuals

B192-H6900-X-1-7400 TB 06.95 — 39,-

- ▼ Informationstechnik

Communications

B193-H6905-X-1-7400 TB 06.95 — 39,-

### Poster

#### Posters

TQM Postersatz (Rolle mit 3 Stck.)

B191-H6608 TB 06.92 — —

TQM poster set (packed in rolls of 3)

B191-H6608-X-X-7600 TB 06.92 — —

"The Art of Electron." (roll with 6 diff. posters)

B191-H6777-X-X-7600 TB 10.92 — V

"Wir bauen Spannungen ab"

B191-H6709 TB 03.93 — —

"Easing the Stress"

B191-H6709-X-X-7600 TB 05.93 — —

Autoelektronik

B112-H6474 TB 08.91 1 —

Optohalbleiter von Siemens

B143-H6375 TB 11.90 1 —

Opto Semiconductors from Siemens,  
Basic Terms

B143-H6375-X-X-7600 TB 11.90 1 —

SIPMOS von Siemens

B152-H6231 TB 06.90 1 —

Thyristor-Stromrichter mit der integrierten  
Phasenanschnittsteuerung TCA 785

B1-H6608 TB 05.86 8 —

Thyristor Current Rectifier with integrated  
Phase Controller TCA 785

B1-H6608-X-X-7600 TB 08.86 8 —

## Allgemeines / General

Titel Title		Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
----------------	--	------------------------------	---------------	--------------------	---------------	----------------

### Videos

#### Videos

The Chain	[VHS/PAL]	B143-H6595-X-X-7600	VK	03.94	—	30,-
The Chain	[VHS/NTSC]	B143-H6595-V1-X-7600	VK	07.95	—	30,-
MEGATEXT®	[VHS/PAL]					
Teletext in neuer Dimension - SDA 5273		B111-H6740	VK	08.93	—	20,-
MEGATEXT®	[VHS/PAL]					
Teletext in a new Dimension - SDA 5273		B111-H6740-X-X-7600	VK	08.93	—	20,-
MEGATEXT®	[VHS/NTSC]					
Teletext in a new Dimension - SDA 5273		B111-H6740-V1-X-7600	VK	08.93	—	20,-

### Schule für Mikroelektronik

#### School of Microelectronics

▼ Programm 04.96 bis 09.96		B192-H6831-G1	TB	01.96	136	—
----------------------------	--	---------------	----	-------	-----	---

## Speicher-Bausteine / Memory Components

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
Memory Components	B166-H6557-G2-X-7600	DB	06.95	440	IV
▼ 64M DRAM Spectrum	B166-H6936-X-X-7600	DB	11.95	224	IV
▼ DRAM Spectrum	B166-H6657-G3-X-7600	PS	03.96	20	—

# Mikrocomputer-Bausteine / Microcomputer Components

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
<b>Allgemeines General</b>					
Microcontrollers	B158-H6569-G1-X-7600	DB	94/95	820	V
Mikrocontroller der 8- und 16-bit-Klasse: Eine Klasse für sich	B158-H6670-G1	TB	05.93	8	—
8-bit and 16-bit microcontrollers: in a class of their own	B158-H6670-G1-X-7600	TB	12.93	8	—
<u>Produktübersicht Kurzfassung / Product Short Form Information</u>					
▼ Control of EMC-playing	B158-H6954-X-X-7600	DA	02.96	2	—
<b>16-Bit Ein-Chip Mikrocontroller 16-Bit Single-Chip Microcontrollers</b>					
SAB 80C166/83C166, CMOS, User's Manual	B158-B6247-X-X-7600	TB	10.93	456	V
Add. to User's Manual SAB 80C166/83C166	B158-H6345-X-X-7600	TB	10.93	24	—
SAB 80C166/83C166/88C166, C165, C167	B158-H6669-X-X-7600	TB	11.93	12	—
SAB 80C166 – auf Schnelligkeit getrimmt	B158-B6206	TB	12.89	6	—
SAB 80C166 unterstützt PROFIBUS	B158-H6686	TB	12.92	6	—
▼ Instruction Set Manual for the C16x Family	B158-H6772-G1-X-7600	TB	09.95	128	—
C165, CMOS, User's Manual	B158-H6799-X-X-7600	TB	08.94	320	IV
▼ C167, CMOS, User's Manual	B158-H6651-G1-X-7600	TB	03.96	340	IV
SAB 80C166/83C166, CMOS	B158-H6226-G2-X-7600	DA	05.94	56	II
SAB 80C166W/83C166W	B158-H6769-X-X-7600	DA	02.94	72	III
SAB 88C166/88C166W, CMOS	B158-H6614-X-X-7600	DA	05.94	60	II
C165, CMOS	B158-H6771-X-X-7600	DA	06.94	52	II
C167, CMOS	B158-H6768-X-X-7600	DA	02.94	60	II
C167CR	B158-H6813-X-X-7600	DA	06.95	64	II
C167SR	B158-H6870-X-X-7600	DA	06.95	64	II
<u>Produktübersicht Kurzfassung / Product Short Form Information</u>					
▼ C163	B158-H6947-X-X-7600	DA	02.96	2	—
▼ C165	B158-H6895-X-X-7600	DA	09.95	2	—
▼ C166 Family	B158-H6877-X-X-7600	DA	08.95	2	—
▼ C167	B158-H6896-X-X-7600	DA	09.95	2	—
▼ C167CR	B158-H6845-X-X-7600	DA	11.95	2	—
▼ SAB 8xC166	B158-H6897-X-X-7600	DA	09.95	2	—



# Mikrocomputer-Bausteine / Microcomputer Components

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
<b>8-Bit Ein-Chip Mikrocontroller 8-Bit Single-Chip Microcontrollers</b>					
SAB 8051x - 8-bit Mikrocontroller-Fam.	B258-B6150	PS	01.90	16	—
The SAB 8051x 8-bit Microcontroller Fam.	B258-B6150-X-X-7600	PS	01.90	16	—
▼ SAB 80515/80C515 Family, User's Manual	B158-H6367-G1-X-7600	TB	08.95	304	IV
SAB 80C515A/83C515A-5 – Add. to User's Manual SAB 80515/80C515 Family	B158-H6613-G1-X-7600	TB	10.94	132	—
SAB 80C517/80C537, CMOS, User's Manual	B258-H6075-G2-X-7600	TB	05.95	376	IV
SAB 80C517A/83C517A-5 – Add. to User's Manual SAB 80517/80C537	B158-H6612-G1-X-7600	TB	08.94	160	—
Klimaregelung im Kfz mit SAB 80515 (Anwendungsbeispiel)	B1-B3611	TB	03.89	12	—
▼ C501, 8-Bit CMOS, User's Manual	B158-H6723-G2-X-7600	TB	02.96	140	III
C502, 8-Bit CMOS, User's Manual	B158-H6722-G1-X-7600	TB	08.94	160	III
▼ C504, 8-Bit CMOS, User's Manual	B158-H6958-X-X-7600	TB	04.96	240	IV
▼ C509, 8-Bit CMOS, User's Manual	B158-H6973-X-X-7600	TB	06.96	350	IV
▼ C511/513, 8-Bit CMOS, User's Manual	B158-H6841-G2-X-7600	TB	06.96	170	III
▼ C500 Pocket Guide	B158-H6986-X-X-7600	TB	07.96		I
▼ SAB C80C5XX Pocket Guide	B158-H6985-X-X-7600	TB	07.96		
▼ AVPC User's Manual	B158-H6990-X-X-7600	TB	07.96	54	II
▼ AISM , C500 Microcontroller Family Architecture and Instruction Set	B158-H6987-X-X-7600	TB	07.96	120	III
Ext. Speicherzugriff mit 8 Pointern (mit SAB 80C517)	B258-B6135	TB	07.89	4	—
EPC 535/532 – Experimental Kit (for SAB 80515/80535)	B258-B6107-X-X-7600	TB	03.89	8	—
Peripheriebausteine integriert Detailapplikationen zum SAB 80515	B2-B3677	TB	05.87	6	—
SAB 80C515A/83C515A-5 und/and SAB 80C517A/83C517A-5	B158-H6519-X-X-7400	TB	11.93	16	—
MC-Tools für den PC XT/AT mit dem Mikrocontroller SAB 80C535 (mit Diskette 5 1/4" und Platine)	A19100-L531-F351	TB	1990	260	119,-
MC-Tools for PC XT/AT using the Microcontroller SAB 80C535 (disc 5 1/4" and pcb including)	A19100-L531-F379-X-7600	TB	1990	256	119,-

# Mikrocomputer-Bausteine / Microcomputer Components

Titel Title	Bestell-Nr. Ordering Code	Art Class	Ausgabe Edition	Seite Page	Preis Price
<b>8-Bit Ein-Chip Mikrocontr. (Forts.)</b>					
<b>8-Bit Single-Chip Microcontr. (cont'd)</b>					
Die 8051-Mikrocontroller-Familie Teil 1, Einführung in die Software (mit Assembler und Disassembler)	A19100-L531-F369	TB	1991	354	148,-
MC-Tools für den PC XT/AT mit dem Mikrocontroller SAB 80C537 (mit Diskette 5 1/4" und Platine)	A19100-L531-F380	TB	1991	303	119,-
Simula51 - Programm, Bedienung, Anwendungsbeisp. (mit Diskette 5 1/4")	A19100-L531-F387	TB	1992	192	148,-
Simula51 - Program, Usage, Applications (with 1 disc 5 1/4")	A19100-L531-F395-X-7600	TB	1992	192	148,-
Simula5x, Simulator für die 8051-Fam. Programm – Bedienung – Anwendungs- beispiele (mit Diskette 5 1/4")	A19100-L531-F402	TB	1993	200	178,-
Applikationen zur 8051-Mikrocontroller- Familie, Band 1	A19100-L531-F408	TB	1993	412	119,-
Applikationen zur 8051-Mikrocontroller- Familie, Band 2	A19100-L531-F422	TB	1993	375	119,-
Handbuch des 80(C)515 und 80C515A	A19100-L531-F390	TB	1992	344	68,-
Handbuch des 80C517 und 80C517A	A19100-L531-F377	TB	1991	364	68,-
▼ Starter Kit C511/513 Family	B158-H6891-X-X-7600	TB	08.95	2	198,-
SAB 80515/80535	B158-H6599-X-X-7600	DA	12.92	40	II
SAB 80515/80535, Ext. Temp. Range	B2-B3846-X-X-7600	DA	09.89	36	II
▼ SAB 80C515/80C535, CMOS, incl. Ext. Temp. Range	B158-H6579-G1-X-7600	DA	02.96	52	II
SAB 80C515A/83C515A-5, CMOS	B158-H6605-X-X-7600	DA	03.93	60	II
SAB 83C515H-3J/83C515H-4J, CMOS	B158-H6369-X-X-7600	DA	10.93	56	II
SAB 80C517/80C537, CMOS, incl. Ext. Temp. Range	B158-H6623-G1-X-7600	DA	04.94	64	II
SAB 80C517A/83C517A-5, CMOS	B158-H6581-G2-X-7600	DA	05.94	80	III
SAB 80C52/80C32, CMOS, incl. Ext. Temp. Range	B158-B6382-X-X-7600	DA	04.91	24	I
EMOD-C517 – Evaluation Module (for SAB 80C517/80C537)	B158-B6228-X-X-7600	DA	02.90	8	—
C501, CMOS	B158-H6639-G3-X-7600	DA	02.95	44	II
C502, CMOS	B158-H6637-G1-X-7600	DA	08.94	48	II
▼ C511/511A/513/513A/513A-4	B158-H6842-G2-X-7600	DA	06.96	44	II

# Mikrocomputer-Bausteine / Microcomputer Components

Titel Title	Bestell-Nr. Ordering Code	Art Class.	Ausgabe Edition	Seite Page	Preis Price
----------------	------------------------------	---------------	--------------------	---------------	----------------

## ▼ C504, CMOS

B158-H6972-X-X-7600

DA

05.96

48

II

### Produktübersicht Kurzfassung / Product Short Form Information

## ▼ C504

B158-H6907-G1-X-7600

DA

03.96

2

—

## ▼ C509

B158-H6888-X-X-7600

DA

09.95

2

—

## ▼ C511/C513 Family

B158-H6846-G1-X-7600

DA

12.95

2

—

## ▼ C515C

B158-H6939-X-X-7600

DA

12.95

2

—

## ▼ SAB 83C515A.AVPC

B158-H6908-X-X-7600

DA

02.96

2

—

## ▼ C501

B158-H6982-X-X-7600

DA

07.96

2

—

## ▼ C515A

B158-H6984-X-X-7600

DA

07.96

2

—

## ▼ C517A

B158-H6983-X-X-7600

DA

07.96

2

—

\_\_\_\_\_

|

# Global PartnerChip for Systems on Silicon

**A**

Siemens AG Österreich  
Erdberger Lände 26  
**1030 Wien**  
☎ (+43) 1-1707-35611  
Fax (+43) 1-1707-55973  
Email: elisabeth.schwarz@siemens.at

**AUS**

Siemens Ltd., Head Office  
544 Church Street  
**Richmond (Melbourne), Vic. 3121**  
☎ (03) 4 20 71 11  
☎ 30 425  
Fax (03) 4 20 73 09  
Email: mark.walsh@siemens.com.au

**B**

Siemens Electronic Components  
Benelux  
Charleroisesteenweg 116/  
Chaussée de Charleroi 116  
**B-1060 Brussel/Bruxelles**  
☎ (+32) 2-536 23 48  
Fax (+32) 2-536 28 57  
Email: ronald.hoeijenbos@p1.com1.  
siemens.scn.400net.nl

**BR**

ICOTRON S.A.  
Indústria de Componentes  
Eletrônicos  
Avenida Mutinga, 3650-6º andar  
**05150 São Paulo-SP**  
☎ (011) 8 33-22 11  
☎ 11-81001  
Fax (011) 8 31-40 06

**CDN**

Siemens Electric Ltd.  
Electronic Components Division  
1180 Courtney Park Drive  
**Mississauga, Ontario L5T 1P2**  
☎ (416) 9 05-819-80 00  
Fax (416) 9 05-819-57 44

**CH**

Siemens Schweiz AG  
Bauelemente  
Freilagerstraße 28  
**8047 Zürich**  
☎ (01) 4 95-31 11  
Fax (01) 4 95-50 50  
Email: alois.bachmann@zrh1.  
siemens-albis.scn.arcom.ch

**D**

Siemens AG  
Salzufer 6-8  
**10587 Berlin**  
☎ (030) 38 63-26 26  
Fax (030) 38 63-24 90

Siemens AG  
Lahnweg 10  
**40219 Düsseldorf**  
☎ (0211) 3 99-29 30  
Fax (0211) 3 99-14 81

Siemens AG  
Lindenplatz 2  
**20099 Hamburg**  
☎ (040) 28 89-38 19  
Fax (040) 28 89-30 92

Siemens AG  
Werner-von-Siemens-Platz 1  
**30880 Laatzen (Hannover)**  
☎ (0511) 8 77-22 22  
Fax (0511) 8 77-20 78

Siemens AG  
Halbleiter Distribution  
Richard-Strauss-Straße 76  
**81679 München**  
☎ (089) 92 21-31 33  
Fax (089) 92 21-20 71

Siemens AG  
Von-der-Tann-Straße 30  
**90439 Nürnberg**  
☎ (0911) 6 54-76 02  
Fax (0911) 6 54-76 24

Siemens AG  
Weissacher Straße 11  
**70499 Stuttgart**  
☎ (0711) 1 37-28 64  
Fax (0711) 1 37-24 48

**DK**

Siemens A/S  
Borupvang 3  
**2750 Ballerup**  
☎ 44 77 44 77  
☎ 12 58 22 22  
Fax 44 77 40 17  
Email: bjarne.jensen@div2.cph1.  
siemens.scn.400net.dk

**E**

Siemens S.A.  
Dpto. Componentes  
Ronda de Europa, 3  
**28760 Tres Cantos-Madrid**  
☎ (01) 8 03 00 85  
Fax (01) 8 03 39 26  
Email: bbeaven@siemens.es

**F**

Siemens S.A.  
39/47, Bd. Ornano  
**93527 Saint-Denis CEDEX 2**  
☎ (1) 49 22 31 00  
☎ 234 077  
Fax (1) 49 22 37 00

**GB**

Siemens plc  
Siemens House  
Oldbury  
Bracknell  
**Berkshire RG12 8FZ**  
☎ (0344) 39 60 00  
Fax (0344) 39 66 32  
Email: semis@plcbrk.siemens.co.uk

**GR**

Siemens AE  
Paradissou & Artemidos  
P.O.B. 61011  
**15110 Amaroussio/Athen**  
☎ (01) 6 86 41 11  
☎ 216 292  
Fax (01) 6 86 42 99

**HK**

Siemens Components Ltd  
23/F., Tai Yau Building  
181 Johnston Road, Wanchai  
**Hong Kong**  
☎ (852) 28 32 05 00  
Fax (852) 28 27 84 21

**I**

Siemens S.p.A.  
Semiconductor Sales  
Via dei Valtorta, 48  
**20127 Milano**  
☎ (02) 6676-1  
Fax (02) 6676-4395

**IND**

Siemens Ltd.  
Head Office  
134-A, Dr. Annie Besant Road,  
Worli  
P.O.B. 6597  
**Bombay 400018**  
☎ (022) 4938786  
☎ 1175142  
Fax (022) 4940240

**IRL**

Siemens Ltd.  
Electronic Components Division  
8 Raglan Road  
**Dublin 4**  
☎ (01) 6684727  
☎ 93744  
Fax (01) 684633  
Email: BTait@dub2.siemens.net

**J**

Siemens Components K.K.  
Shinjuku Koyama Bldg. 2F  
30-3, 4-Chome  
Yoyogi, Shibuya-ku  
**Tokyo 151**  
☎ (81) 3-53888525  
Fax (81) 3-33769792

**N**

Siemens A/S  
Østre Aker vei 90  
Postboks 10, Veitvet  
**0518 Oslo 5**  
☎ (02) 633000  
☎ 78477  
Fax (02) 633805

**NL**

Siemens Electronic Components  
Benelux  
Postbus 16068  
**NL-2500 BB Den Haag**  
☎ (+31) 70-3332429  
Fax (+31) 70-3332815

**P**

Siemens S.A.  
Estrada Nacional 117, Km 2,6  
Alfragide  
**2700 Amadora**  
☎ (01) 4170011  
☎ 62955  
Fax (01) 4172870

**PL**

Siemens Sp. z.o.o.  
ul. Stawki 2  
POB 276  
**00-950 Warszawa**  
☎ 635169  
☎ 825554  
Fax 6355238

**RC**

Tai Engineering Co., Ltd.  
6th Fl., Central Building  
108, Chung Shan North Road, Sec. 2  
P.O. Box 68-1882  
**Taipei 10449**  
☎ (02) 5234700  
☎ 27860 taiengco  
Fax (02) 5367070

**ROK**

Siemens Ltd.  
Asia Tower Bldg, 10th floor  
726 Yeoksam-dong, Kangnam-ku  
CPO Box 3001, Seoul 135-080  
**Korea**  
☎ (822) 527-7740  
Fax (822) 527-7779

**RUS**

Siemens AG  
1. Donskoj pr., 2  
**Moskva 117419**  
☎ (095) 237-6476, -6911  
☎ 414385  
Fax (095) 237-6614

**S**

Siemens Components  
Österögatan 1  
Box 46  
**S-164 93 Kista**  
☎ (08) 7033500  
☎ 11672  
Fax (08) 7033501

**SF**

Siemens Oy  
P.O.B. 60  
**02601 Espoo**  
☎ (0) 51051, ☎ 124465  
Fax (0) 51052398

**SGP**

Siemens Components Pte. Ltd.  
166 Kallang Way  
**Singapore 1334**  
☎ (65) 8400600  
Fax (65) 7421080

**TR**


SIMKO Ticaret ve Sanayi A.S.  
Meclisi Mebusan Cad. No. 125  
P.K. 1001, 80007 Karaköy  
**80040 Findikli**  
☎ (01) 2510900  
☎ 24233 sies tr  
Fax (01) 2524134

**USA**

Siemens Components, Inc.  
Integrated Circuit Division  
10950 North Tantau Avenue  
**Cupertino, CA 95014**  
☎ (408) 777-4500  
Fax (408) 777-4977

**ZA**

Siemens Ltd.  
Siemens House,  
P.O.B. 4583  
**Johannesburg 2000**  
☎ (011) 6522000  
☎ 450091  
Fax (011) 6522711

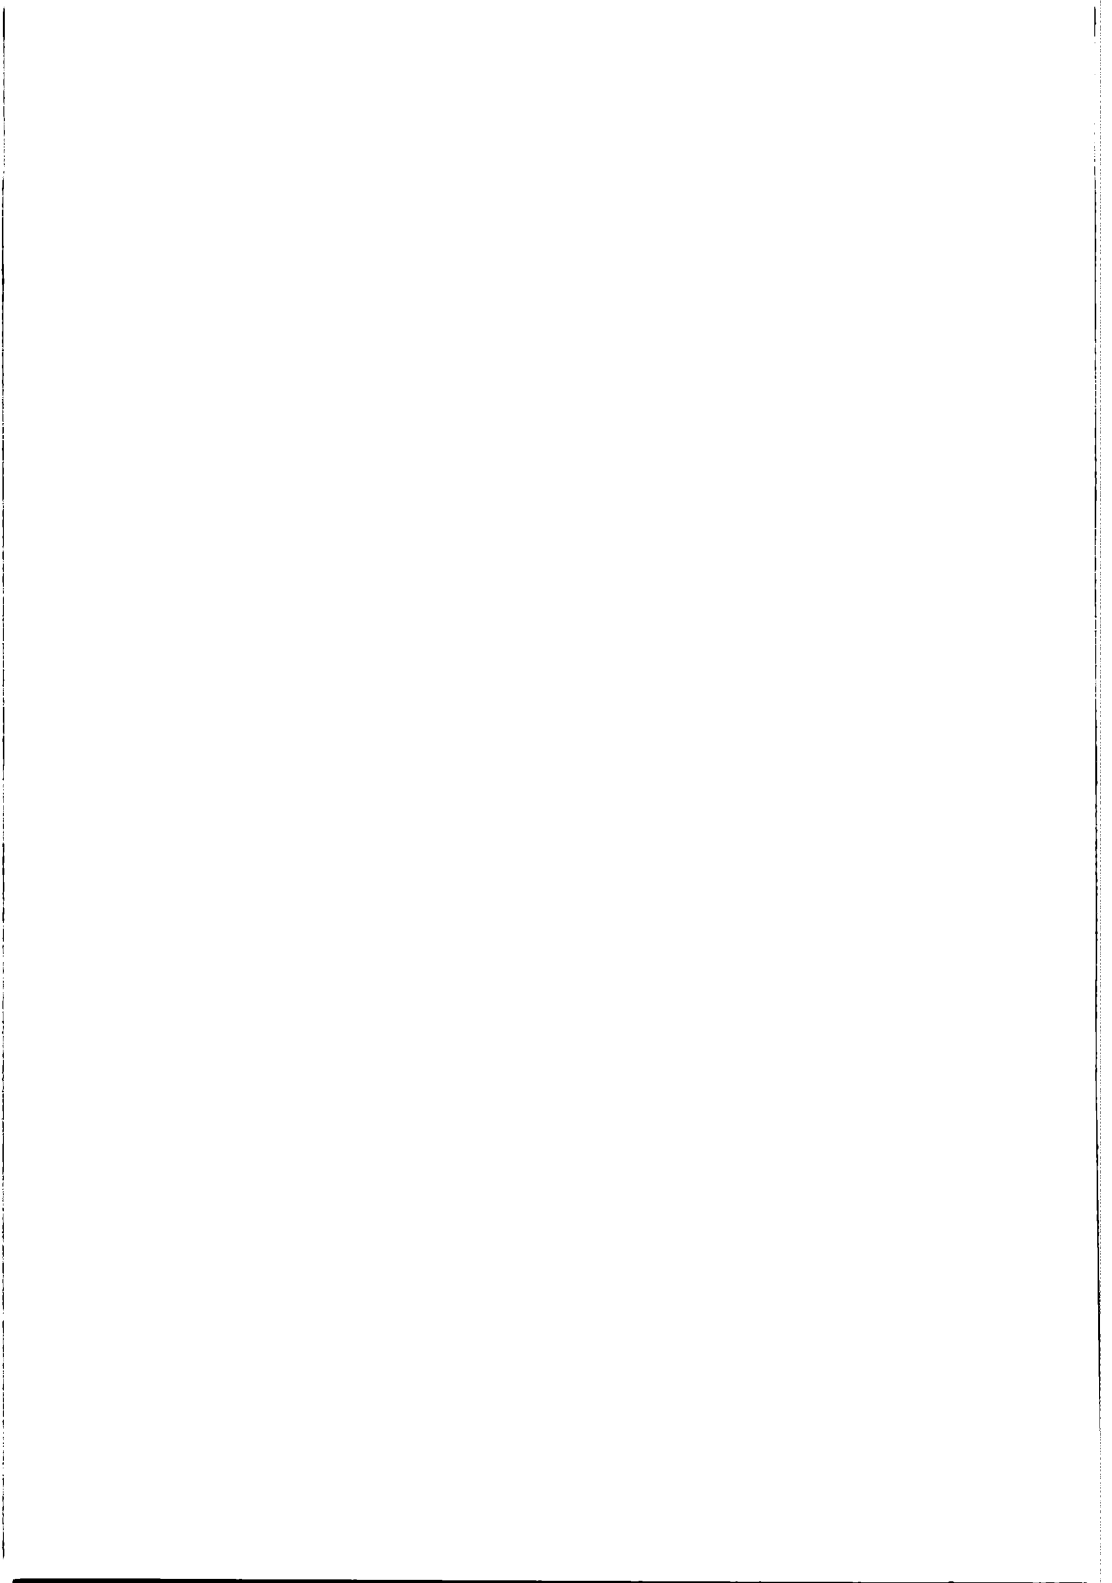





---

## **Contents**

---

## **Fundamental Structure**

---

## **CPU Functions**

---

## **CPU Timing**

---

## **Instruction Set**

---

## **Package Information**

---

**Microelectronics Training Center  
Information on Literature  
Semiconductor Group – Addresses**

---

# Total Quality Management

Qualität hat für uns eine umfassende Bedeutung. Wir wollen allen Ihren Ansprüchen in der bestmöglichen Weise gerecht werden. Es geht uns also nicht nur um die Produktqualität – unsere Anstrengungen gelten gleichermaßen der Lieferqualität und Logistik, dem Service und Support sowie allen sonstigen Beratungs- und Betreuungsleistungen.

Dazu gehört eine bestimmte Geisteshaltung unserer Mitarbeiter. Total Quality im Denken und Handeln gegenüber Kollegen, Lieferanten und Ihnen, unserem Kunden. Unsere Leitlinie ist, jede Aufgabe mit „Null Fehlern“ zu lösen – in offener Sichtweise auch über den eigenen Arbeitsplatz hinaus – und uns ständig zu verbessern. Unternehmensweit orientieren wir uns dabei auch an „top“ (Time Optimized Processes), um Ihnen durch größere Schnelligkeit den entscheidenden Wettbewerbsvorsprung zu verschaffen.

Geben Sie uns die Chance, hohe Leistung durch umfassende Qualität zu beweisen. Wir werden Sie überzeugen.

Quality takes on an all-encompassing significance at Semiconductor Group. For us it means living up to each and every one of your demands in the best possible way. So we are not only concerned with product quality. We direct our efforts equally at quality of supply and logistics, service and support, as well as all the other ways in which we advise and attend to you.

Part of this is the very special attitude of our staff. Total Quality in thought and deed, towards co-workers, suppliers and you, our customer. Our guideline is "do everything with zero defects", in an open manner that is demonstrated beyond your immediate workplace, and to constantly improve. Throughout the corporation we also think in terms of Time Optimized Processes (top), greater speed on our part to give you that decisive competitive edge.

Give us the chance to prove the best of performance through the best of quality – you will be convinced.

Published by Semiconductor Group

Siemens Aktiengesellschaft



Global PartnerChip  
for Systems on Silicon

Ordering No. B158-H6987-G1-X-7600  
Printed in Germany  
TB 06973. T 0524